


Medium Power Section H-Bridge

Maximum current draw per output: 10 A
Maximum load voltage: 12 - 48 V (BOM dependent)
Maximum PWM frequency: 40 kHz
Maximum duty cycle 85 %
H-bridge switching
Gate drive voltage: 12 V
Default state after power-up: disabled
Global POWER_ENABLE signal provided by MainControlBoard

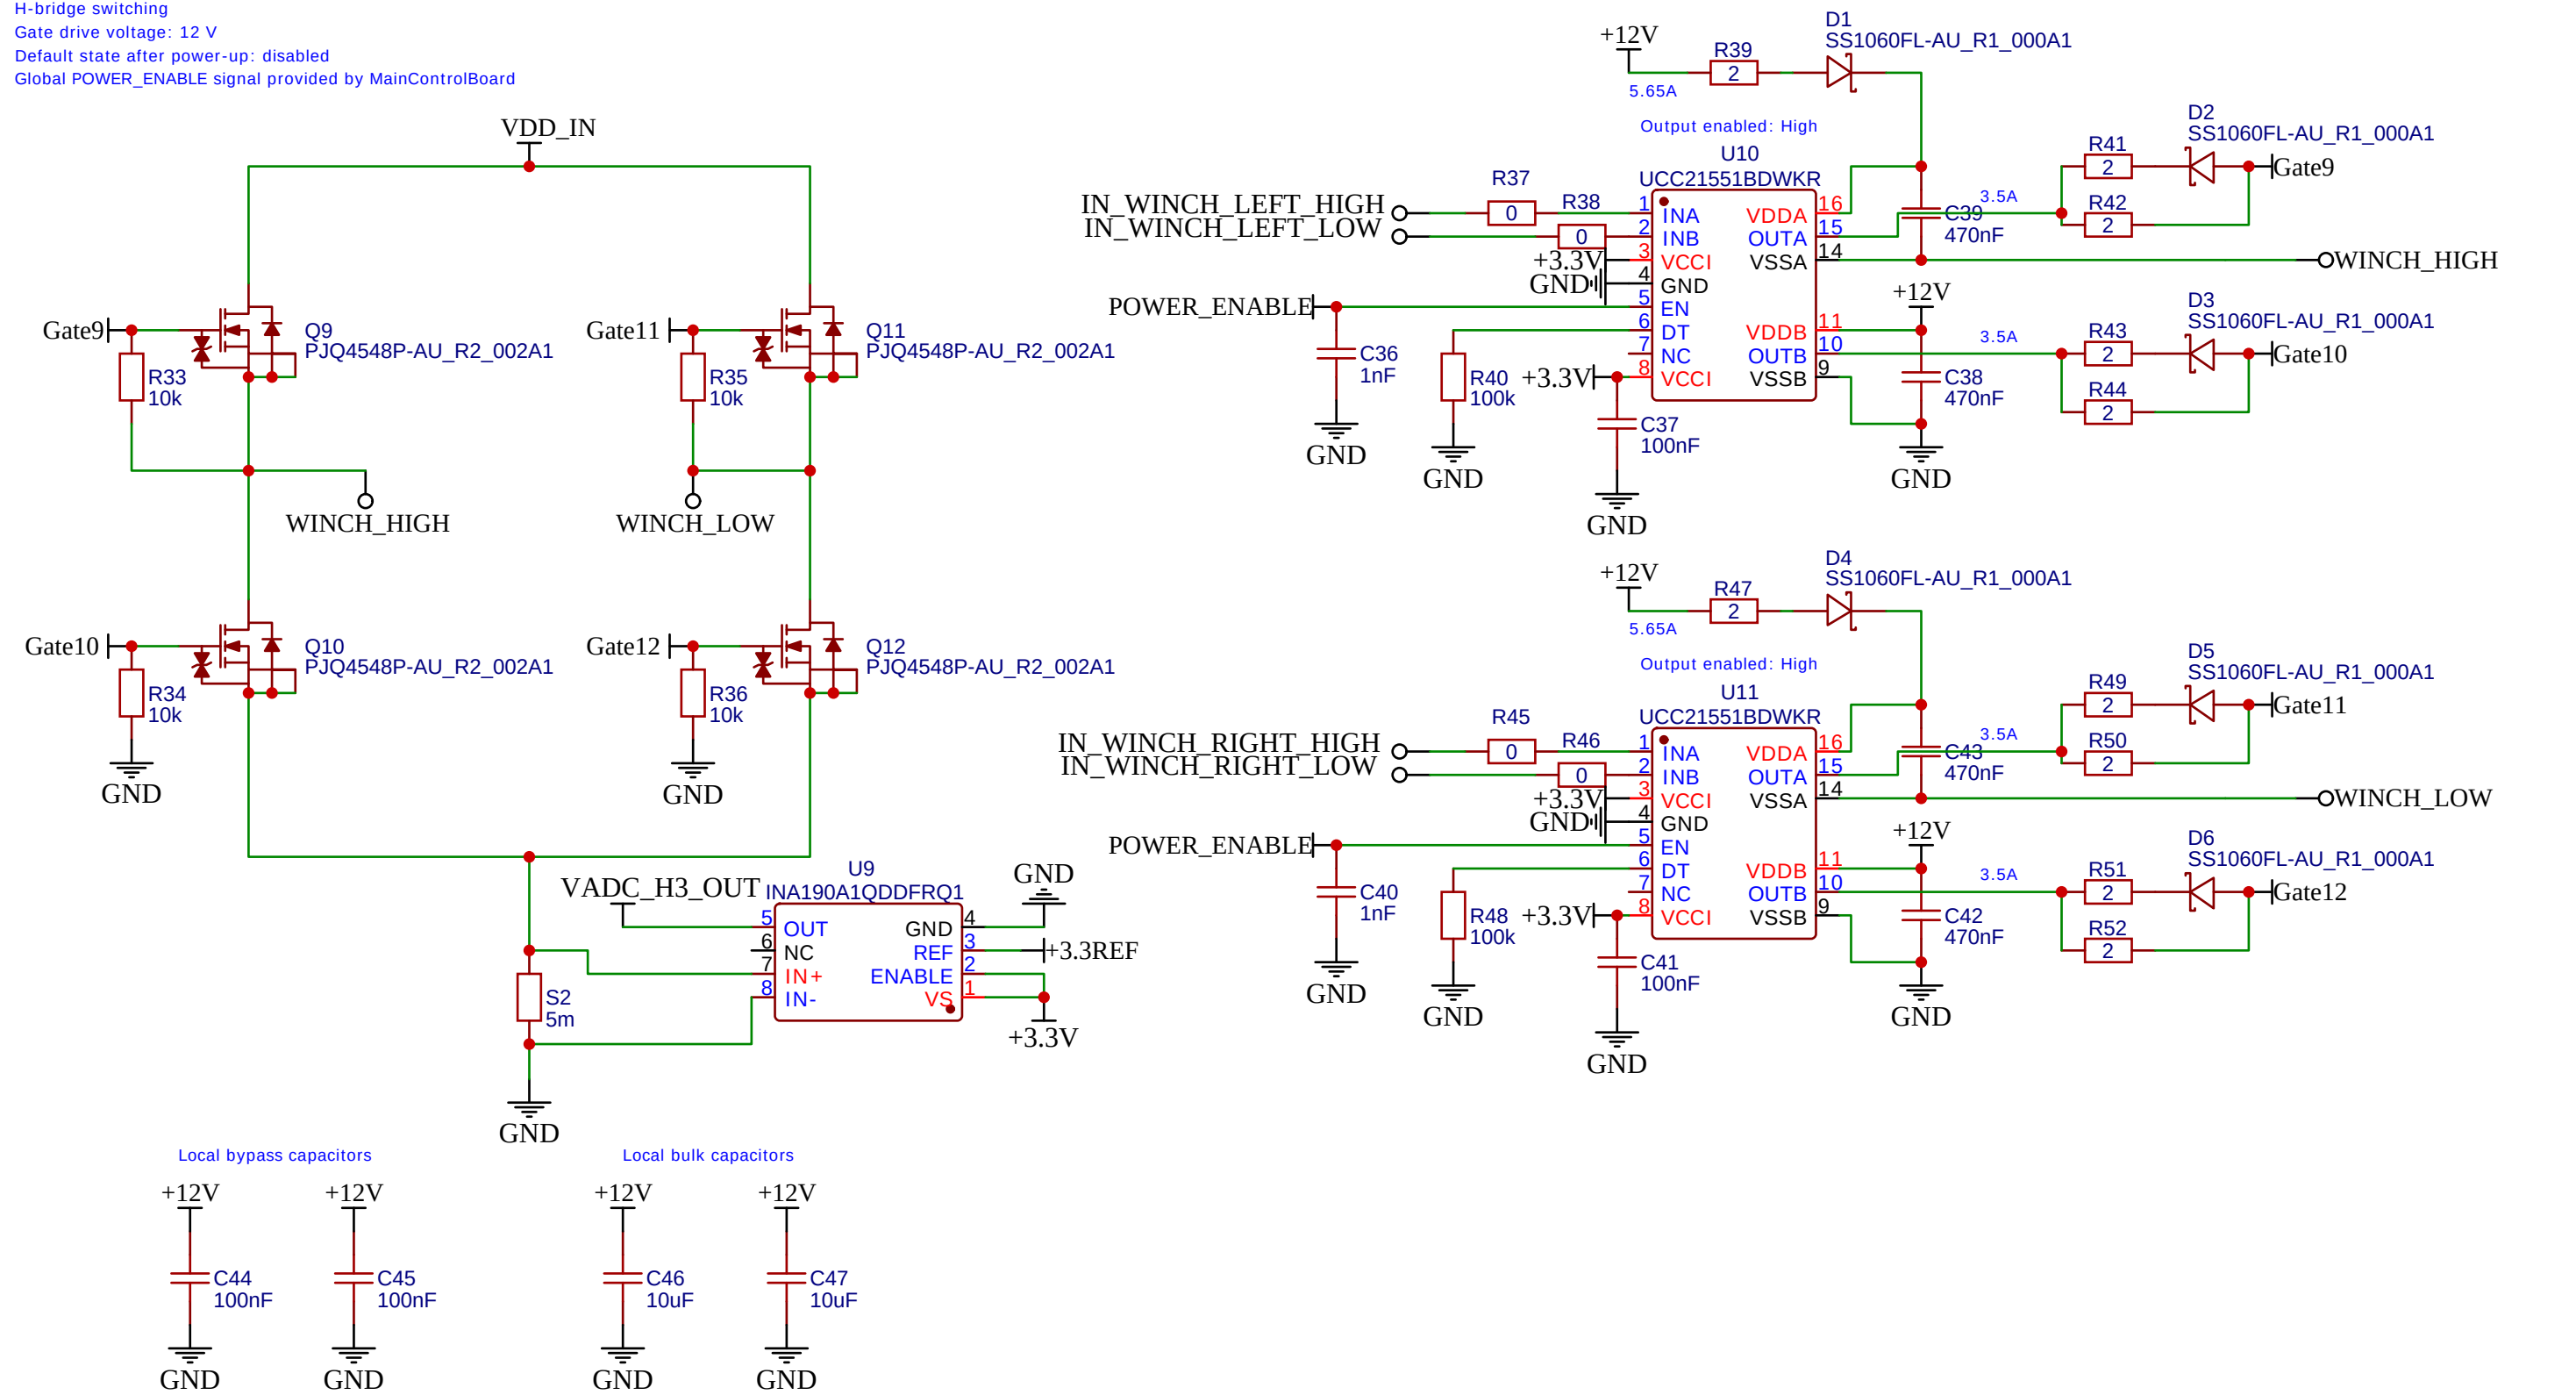

TITLE: Medium Power Section H-Bridge		REV: 3.1
EasyEDA	Company:	Sheet: 7/13
	Date: 2026-07-22 Drawn By: Alan Kudelko	