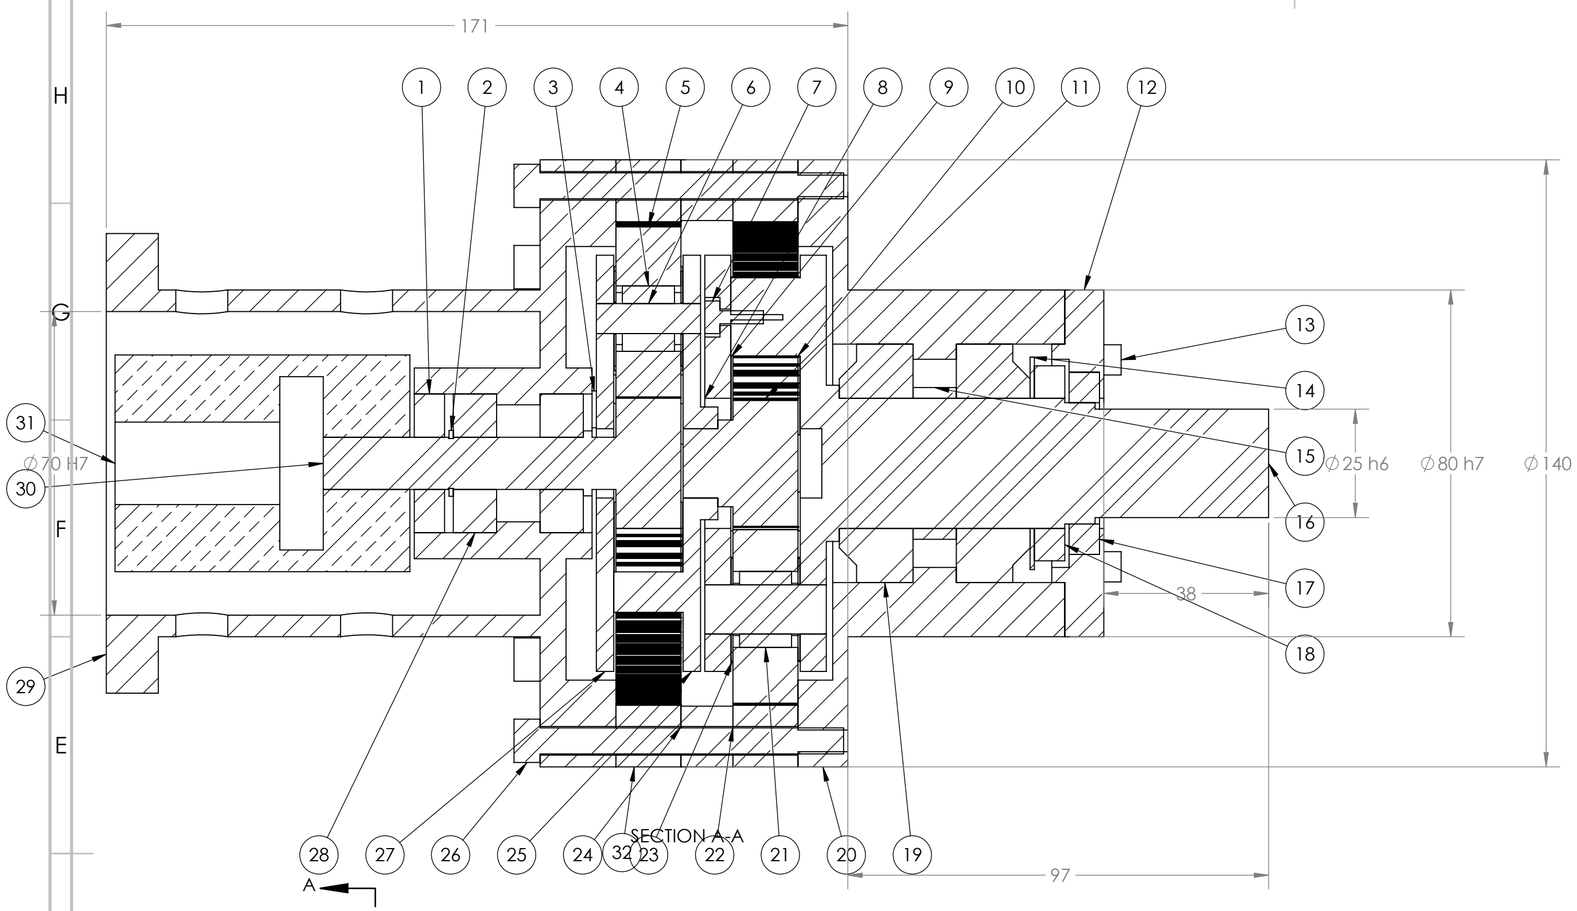


ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	QTY.
1	Radial_Seal_12x32x7	Radial shaft seal DIN 3760 A 12x32x7 NBR	NBR	1
2	Circlip_DIN471_12x1	Retaining ring DIN 471 12x1	1.8159 (51CrV4)	1
3	ISO4762_M5x12	Socket head cap screw ISO 4762 M5x12 - 8.8	1.1191 (C45E)	3
4	Stage_1_Planet_Bearing	Drawn cup needle bearing HK1212	1.3505 (100Cr6), 60 HRC	3
5	Stage_1_Planet_Gear	PG25-202 Planet gear, z27 m1.5, crowned	1.6587 (18CrNiMo7-6)	3
6	Stage_1_Planet_Shaft	PG25-203 Planet pin d12 h6, stage 1	1.3505 (100Cr6), 60 HRC	3
7	DIN7984_M5x10	Low-head socket cap screw DIN 7984 M5x10 - 8.8	1.1191 (C45E)	3
8	Stage_2_Carrier_Rear_Plate	PG25-306 Carrier plate 2, input side	1.7225 (42CrMo4)	1
9	Stage_2_Planet_Shaft	PG25-304 Planet pin d12 h6, stage 2	1.3505 (100Cr6), 60 HRC	3
10	Stage_2_Planet_Gear	PG25-303 Planet gear, z27 m1.5, crowned	1.6587 (18CrNiMo7-6)	3
11	Stage_2_Sun_Gear	PG25-301 Sun 2 with DIN 5480 stub, z18	1.6587 (18CrNiMo7-6)	1
12	Output_Seal_Cover	PG25-504 Output seal cover	1.0503 (C45)	1
13	ISO4762_M4x16	Socket head cap screw ISO 4762 M4x16 - 8.8	1.1191 (C45E)	4
14	Lock_Washer_MB6	Lock washer MB 6 (DIN 5406)	1.0037 (S235JR)	1
15	Output_Bearing_Spacer	PG25-401 Cone spacer, ground to setting	1.0503 (C45)	1
16	Stage_2_Carrier_Front_Plate	PG25-305 Output carrier, integral shaft	1.7225 (42CrMo4)	1
17	Radial_Seal_28x42x7	Radial shaft seal DIN 3760 A 28x42x7 NBR	NBR	1
18	Lock_Nut_KM6	Lock nut KM 6 (M30x1.5)	1.0503 (C45)	1
19	TRB_32006X	Tapered roller bearing 32006 X	1.3505 (100Cr6), 60 HRC	2
20	Output_Housing	PG25-501 Output housing	0.7050 (EN-GJS-500-7)	1
21	Stage_2_Planet_Bearing	Drawn cup needle bearing HK1212	1.3505 (100Cr6), 60 HRC	3
22	Stage_2_Ring_Gear	PG25-302 Ring gear 2, z72 m1.5, housing section	1.7225 (42CrMo4)	1
23	Planet_Thrust_Washer	PG25-206 Planet thrust washer 12.2x24x0.4	1.8159 (51CrV4)	12
24	Interstage_Spacer_Ring	PG25-502 Interstage spacer ring	1.0503 (C45)	1
25	Stage_1_Carrier_Rear_Plate	PG25-205 Carrier plate 1, bridges + spline hub	1.7225 (42CrMo4)	1
26	ISO4762_M6x70	ISO 4762 M6x70-8.8, 10.1 N.m	1.1191 (C45E)	8
27	Stage_1_Carrier_Front_Plate	PG25-204 Carrier plate 1, input side	1.7225 (42CrMo4)	1
28	DGBB_6201_2Z	Deep groove ball bearing 6201-2Z (12x32x10)	1.3505 (100Cr6), 60 HRC	2
29	Input_Housing	PG25-503 Input housing / motor adapter	0.7050 (EN-GJS-500-7)	1
30	Input_Shaft_Sun_Gear	PG25-101 Input shaft with sun 1, z18 m1.5	1.6587 (18CrNiMo7-6)	1
31	Bellows_Coupling_D50x68	Metal bellows coupling TKN>=12.5 N.m, 12/19 H7	3.1355 (EN-AW 2024)	1
32	Stage_1_Ring_Gear	PG25-201 Ring gear 1, z72 m1.5, housing section	1.7225 (42CrMo4)	1
33	ISO8734_6x60	Dowel pin ISO 8734 6 m6 x 60, hardened	1.3505 (100Cr6), 60 HRC	2

GENERAL NOTES
1. Dimensions in mm. ISO GPS (ISO 8015, ISO 1101, ISO 5459). General tolerances ISO 2768-mK.
2. Ratio 25:1 (2 x 5:1), 18/27/72, m 1.5, x = 0, ISO 1328-1 grade 6. Output T2N 59.8 N.m (rating 90 N.m), T2B 209 N.m.
3. Output backlash <= 10 arcmin worst case (4.6 - 8.9 arcmin statistical). Tooth thickness allowances (um): sun -15/-35, planets -20/-40, rings -15/-35.
4. Planets: helix crowning Cb = 5 +/-2 um. Planet end float 0.14 - 0.29 mm. Input bearing axial play 0.05 - 0.44 mm.
5. Output bearings 32006 X, O arrangement: grind cone spacer for 0 - 10 um axial preload; lock KM 6 with MB 6 tab.
6. Tie bolts 8 x M6-8.8 at 10.1 N.m, cross pattern. Cage screws M5-8.8 at 5.9 N.m, medium-strength threadlocker. Joint faces: anaerobic flange sealant.
7. Ring gears, spacer and housings: dowel holes line-reamed on assembly, dia 6 H7, with the stack clamped.
8. Grease NLGI 0, ISO VG 220 base oil, 35 % of free volume. Paint outer surfaces; black-oxide ring outside diameters.
9. Mounting: 4 x M8-10.9 on dia 128, spigot dia 80 h7. Motor SGM7J-08A: spigot dia 70 h7, 4 x M6 on dia 90. Mass 10.1 kg without motor.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:		DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION A
	NAME	SIGNATURE	DATE		TITLE: Gearbox 25:1 - GA	
DRAWN			2026-11-04			
CHK'D						
APPV'D						
MFG						
Q.A				MATERIAL:	DWG NO. PG25-000	A2
				WEIGHT: 10.1 kg	SCALE:1:1	SHEET 1 OF 1

SOLIDWORKS Educational Product. For Instructional Use Only.