
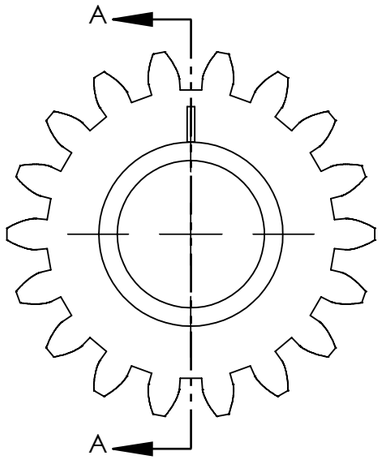


GEAR DATA (SUN)	EXTERNAL SPUR GEAR
Module m / teeth z	1.5 / 18
Pressure angle / rack	20 deg / ISO 53 A
Profile shift x	0
Pitch / tip / root dia	27.000 / 30 h11 / 23.25
Face width b	15
Accuracy	ISO 1328-1 grade 6
Tooth thickness allowance	-0.015 / -0.035
Span W2 (k = 2)	7.006 / 6.988
Dimension over balls Md (2.5)	30.227 / 30.180
Runout Fr	grade 6, to A
Mating gear / centre dist.	planet z27 / 33.75

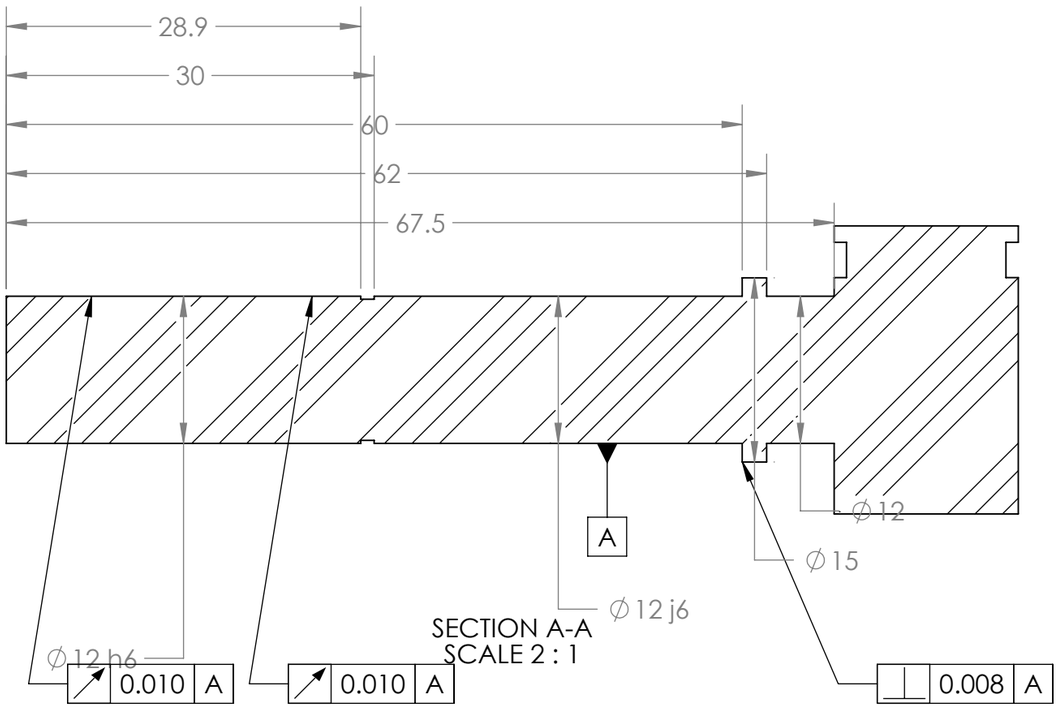

SECTION A-A
SCALE 2 : 1

NOTES
1. 1.6587 (18CrNiMo7-6) case-hardened Eht 0.3-0.5, 58-62 HRC; teeth ground. Journals ground Ra 0.4.
2. Dia 12 j6 on the bearing seats (15-45 from the sun face side); seal land 47-54 Ra 0.2-0.5 plunge-ground; coupling journal 55-75 dia 12 h6. Groove for DIN 471 12x1: dia 11.5 h12, width 1.1 H13.
3. ISO 8015; ISO 2768-mK; unspecified edges 0.3 x 45 deg.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING	REVISION
	NAME	SIGNATURE	DATE		TITLE:	
DRAWN					Input shaft with sun 1	
CHK'D						
APPV'D						
MFG						
Q.A				MATERIAL:	DWG NO.	A3
				18CrNiMo7-6 case-hardened	PG25-101	
				WEIGHT: 0.07 kg	SCALE:2:1	SHEET 1 OF 1

SOLIDWORKS Educational Product. For Instructional Use Only.