
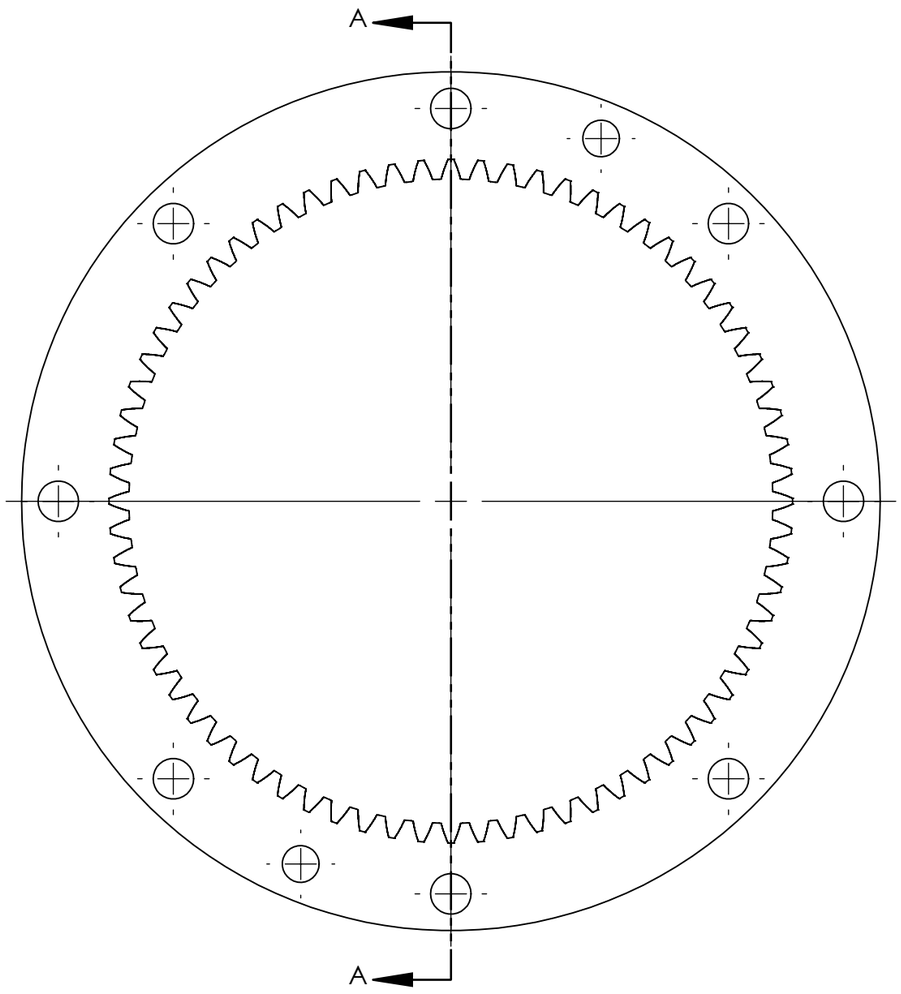


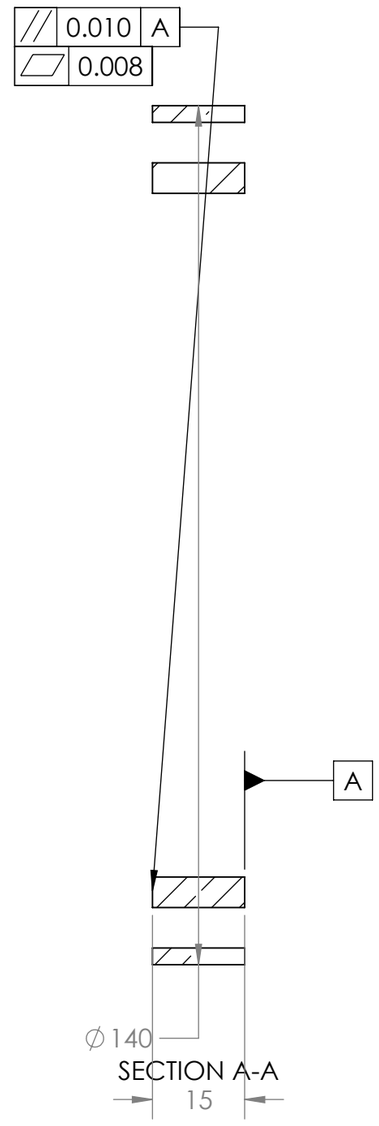

GEAR DATA	INTERNAL SPUR GEAR
Module m	1.5
Number of teeth z	72
Pressure angle	20 deg
Basic rack	ISO 53 profile A
Profile shift x	0
Pitch diameter d	108.000
Tip diameter da (internal)	105.0 +0.10/0
Root diameter df	111.75
Face width b	15
Accuracy	ISO 1328-1 grade 6
Tooth thickness allowance	-0.015 / -0.035
Dimension between balls Mdi	104.681 / 104.740
Ball diameter	2.5
Runout Fr	grade 6, to A and dowels
Mating gear	PG25-202/303, z 27
Centre distance	33.75 +/-0.008

NOTES
1. Applies to PG25-201 (stage 1) and PG25-302 (stage 2): identical parts.
2. 1.7225 (42CrMo4) +QT 280-320 HB. Teeth shaped and ground; OD black-oxide.
3. 8 x dia 6.6 through on dia 128 at 0 deg + n x 45 deg (tie bolts).
4. 2 x dia 6 H7 at 67.5 / 247.5 deg on dia 128, reamed with the stack (PG25-000 note 7).
5. Both faces Ra 0.8 (joint faces, anaerobic sealant).
6. ISO 8015; ISO 2768-mK; edges 0.3 x 45 deg; tooth tips 0.2 x 45 deg.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:		DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	
	NAME	SIGNATURE	DATE	TITLE: Ring gear z72 m1.5		
DRAWN						
CHK'D						
APPV'D						
MFG						
Q.A				MATERIAL: 42CrMo4 +QT 280-320 HB	DWG NO. PG25-201_302	A3
				WEIGHT: 0.69 kg	SCALE:1:1	SHEET 1 OF 1

SOLIDWORKS Educational Product. For Instructional Use Only.