
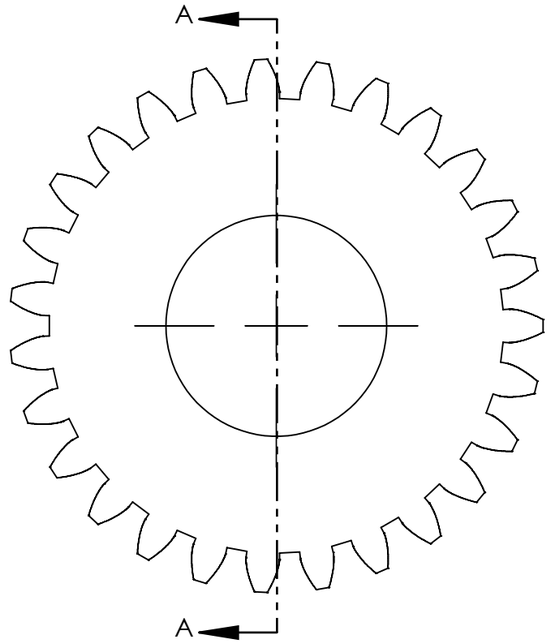


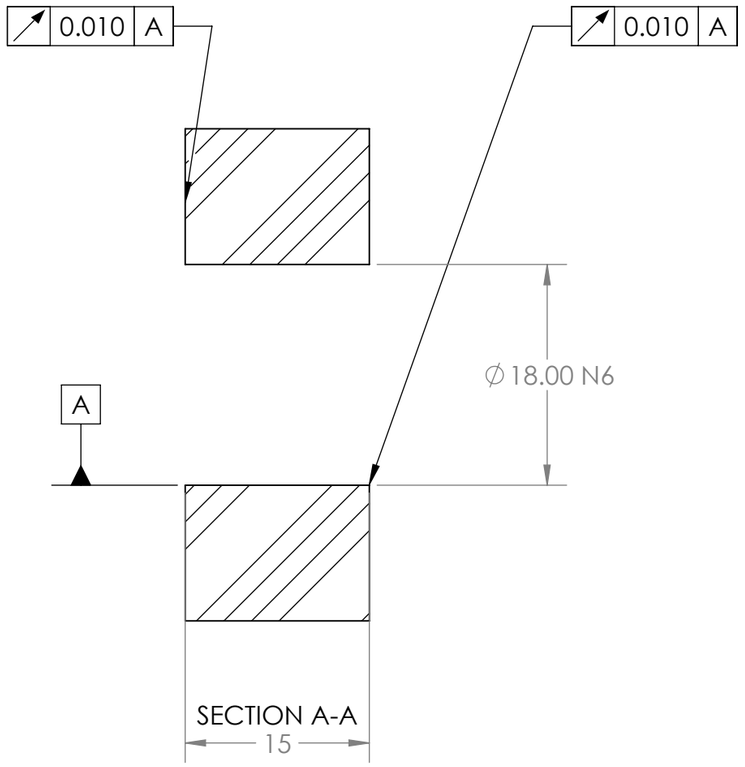

GEAR DATA	EXTERNAL SPUR GEAR
Module m	1.5
Number of teeth z	27
Pressure angle	20 deg
Basic rack	ISO 53 profile A
Profile shift x	0
Pitch diameter d	40.500
Tip diameter da	43.5 h11
Root diameter df	36.75
Face width b	15
Accuracy	ISO 1328-1 grade 6
Tooth thickness allowance	-0.020 / -0.040
Span W3 (k = 3)	11.619 / 11.600
Dimension over balls Md	43.664 / 43.615
Ball diameter	2.5
Helix crowning Cb	5 +/-2 um, both flanks
Runout Fr	grade 6, to A
Mating gears	sun z18, ring z72
Centre distance	33.75 +/-0.008

NOTES
1. Applies to PG25-202 (stage 1) and PG25-303 (stage 2): identical parts.
2. 1.6587 (18CrNiMo7-6) case-hardened, Eht 0.3-0.5 mm (550 HV1), 58-62 HRC; core 30-40 HRC.
3. Teeth ground after hardening, with helix crowning; flanks Ra 0.4.
4. Bore dia 18 N6 for the drawn cup HK1212, Ra 0.8; cup pressed flush 1.5 mm inside each face.
5. Faces Ra 0.8: thrust washer bearing faces.
6. ISO 8015; ISO 2768-mK; edges 0.3 x 45 deg; tooth tips 0.2 x 45 deg.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING	REVISION
	NAME	SIGNATURE	DATE			TITLE:	
DRAWN						Planet gear z27 m1.5	
CHK'D							
APPV'D							
MFG							
Q.A				MATERIAL:		DWG NO.	A3
				18CrNiMo7-6 case-hardened		PG25-202_303	
				WEIGHT: 0.12 kg		SCALE:2:1	SHEET 1 OF 1

SOLIDWORKS Educational Product. For Instructional Use Only.