
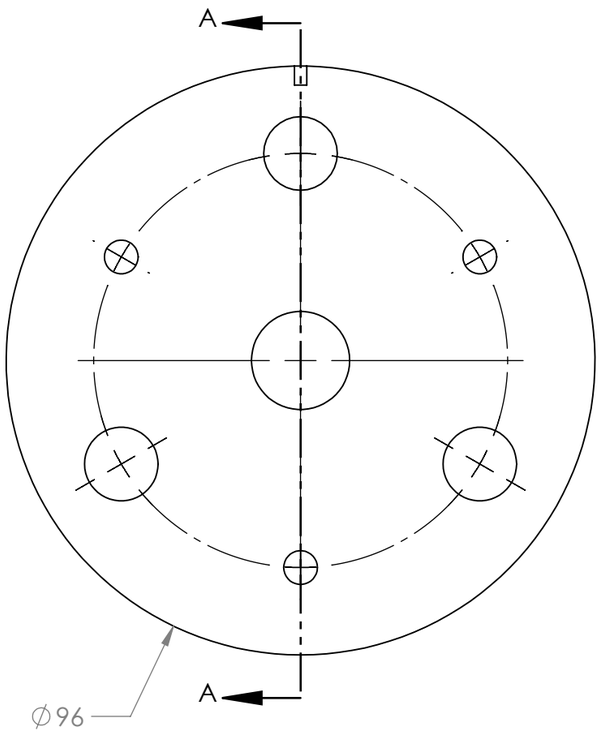


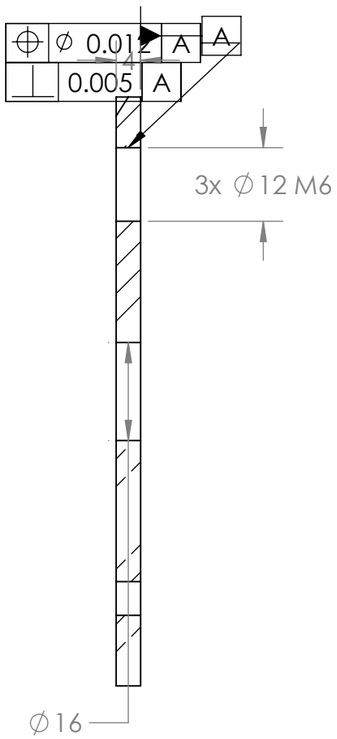

SECTION A-A

NOTES
1. 1.7225 (42CrMo4) +QT 280-320 HB.
2. 3 x dia 12 M6 pin bores on dia 67.5 at 120 deg (pins are the dowels of this plate, D-024); finish-bored with the cage bolted.
3. 3 x dia 5.5 through for M5 x 12 ISO 4762 between the pin bores, on dia 67.5.
4. Inner face (planet side) perpendicular 0.010 to the pin-bore pattern; Ra 0.8 (thrust washer face).
5. ISO 8015; ISO 2768-mK; edges 0.3 x 45 deg.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:		DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	
	NAME	SIGNATURE	DATE	TITLE:		
DRAWN				Carrier plate 1, input side		
CHK'D						
APPV'D						
MFG						
Q.A				MATERIAL: 42CrMo4 +QT 280-320 HB	DWG NO. PG25-204	A3
				WEIGHT: 0.18 kg	SCALE:1:1	SHEET 1 OF 1

SOLIDWORKS Educational Product. For Instructional Use Only.