
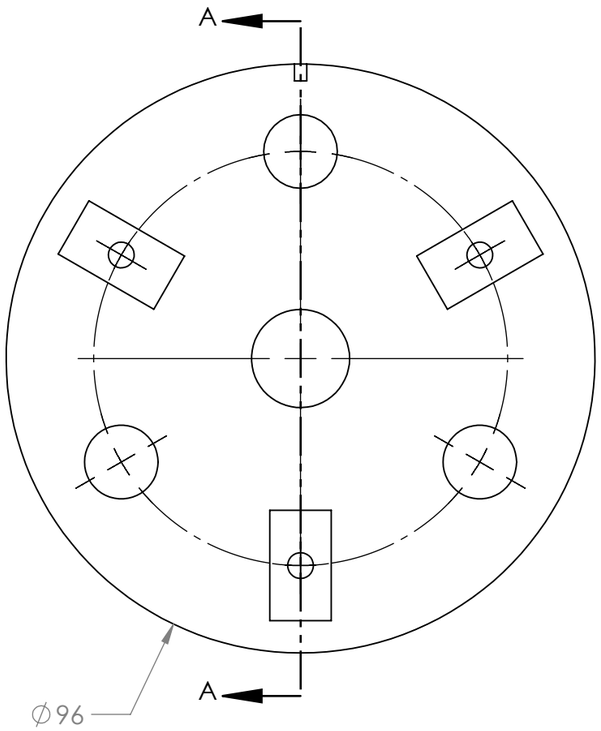


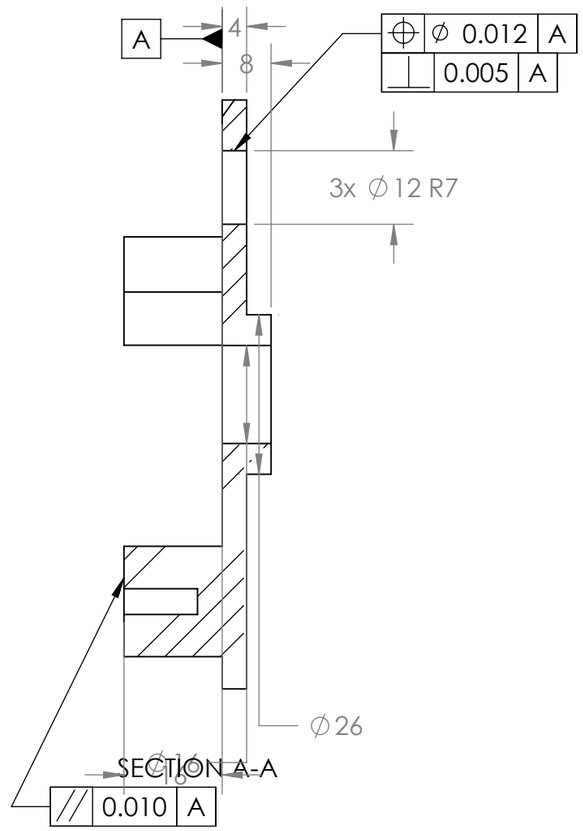

NOTES
1. 1.7225 (42CrMo4) +QT 280-320 HB.
2. 3 x dia 12 R7 pin bores on dia 67.5 at 120 deg (press fit, D-024); finish-bored with the cage bolted.
3. Bridges 10 x 18, 3 x M5-6H x 12 deep on dia 67.5. Bridge tops parallel 0.010 to the plate face.
4. Hub: DIN 5480 N 16 x 1 x 14 internal spline (bore for the PG25-301 stub, interference fit), coaxial 0.010 to the pin-bore pattern.
5. Inner face Ra 0.8 (thrust washer face). ISO 8015; ISO 2768-mK.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:		DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	
	NAME	SIGNATURE	DATE	TITLE:		
DRAWN				Carrier plate 1, bridge side		
CHK'D						
APPV'D						
MFG						
Q.A				MATERIAL:	DWG NO.	A3
				42CrMo4 +QT 280-320 HB	PG25-205	
				WEIGHT: 0.30 kg	SCALE:1:1	SHEET 1 OF 1

SOLIDWORKS Educational Product. For Instructional Use Only.