
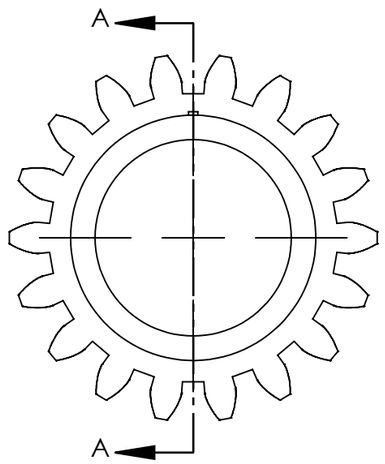


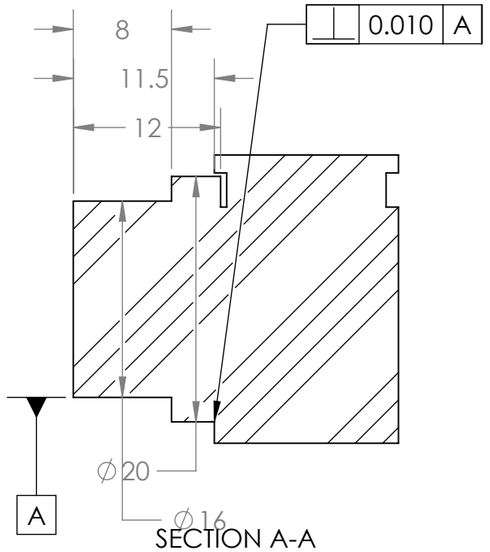

SECTION A-A

GEAR DATA (SUN 2)	EXTERNAL SPUR GEAR
Module m / teeth z	1.5 / 18
Pressure angle / rack	20 deg / ISO 53 A
Profile shift x	0
Pitch / tip / root dia	27.000 / 30 h11 / 23.25
Face width b	15
Accuracy	ISO 1328-1 grade 6
Tooth thickness allowance	-0.015 / -0.035
Span W2 (k = 2)	7.006 / 6.988
Dimension over balls Md (2.5)	30.227 / 30.180
Runout Fr	grade 6, to A
Mating gear / centre dist.	planet z27 / 33.75

NOTES
1. 1.6587 (18CrNiMo7-6) case-hardened Eht 0.3-0.5, 58-62 HRC; teeth ground (data as PG25-101 sun, z18 m1.5).
2. Spline stub DIN 5480 W 16 x 1 x 14 x 8f, pressed into the PG25-205 hub (interference spline, D-020).
3. Dia 20 shoulder face is the axial stop; perpendicular 0.010 to the spline axis.
4. Tooth thickness allowance -0.015 / -0.035; span W2 7.006 / 6.988; ISO 1328-1 grade 6.
5. ISO 8015; ISO 2768-mK; unspecified edges 0.3 x 45 deg.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:		DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	
	NAME	SIGNATURE	DATE	TITLE: Sun 2 with spline stub		
DRAWN						
CHK'D						
APPV'D						
MFG						
Q.A				MATERIAL: 18CrNiMo7-6 case-hardened	DWG NO. PG25-301	A3
				WEIGHT: 0.06 kg	SCALE:2:1	SHEET 1 OF 1

SOLIDWORKS Educational Product. For Instructional Use Only.