

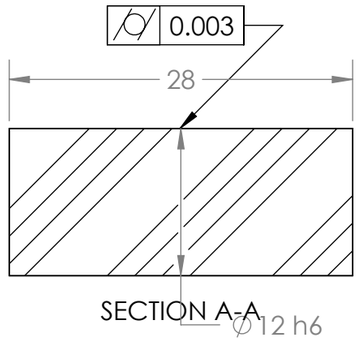

NOTES
1. 1.3505 (100Cr6) through-hardened 60-64 HRC, min. 58 HRC on the raceway (needle bearing HK1212).
2. Dia 12 h6 ground, Ra 0.2, roundness 0.002, cylindricity 0.003; raceway zone free of grinding burns.
3. Press fit R7 in the bridge plate, M6 in the bolted plate (D-024). Both ends chamfered 0.5 x 15 deg for pressing.
4. ISO 8015; ISO 2768-fH.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:			DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
	NAME	SIGNATURE	DATE		TITLE: Planet pin d12 x 28, stage 2	
DRAWN						
CHK'D						
APPV'D						
MFG						
Q.A				MATERIAL: 100Cr6 60-64 HRC	DWG NO. PG25-304	A3
				WEIGHT: 0.025 kg	SCALE:2:1	SHEET 1 OF 1

SOLIDWORKS Educational Product. For Instructional Use Only.