
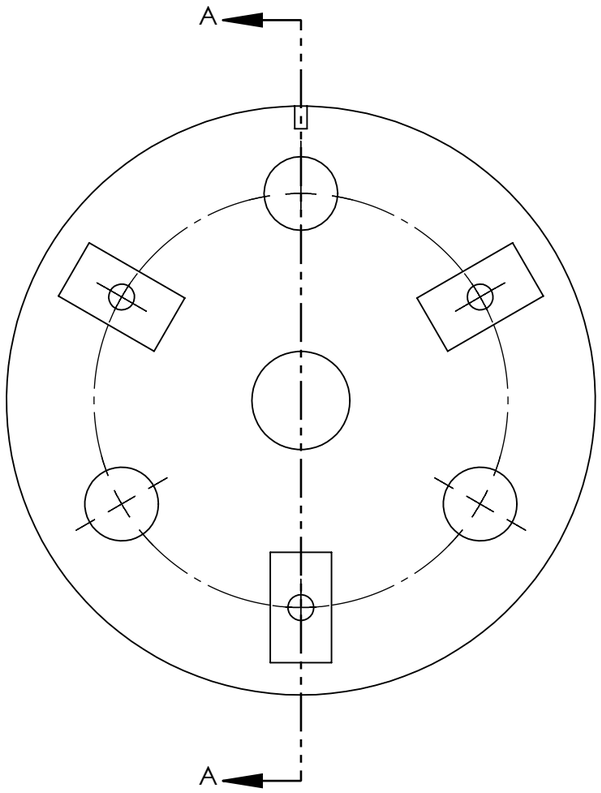


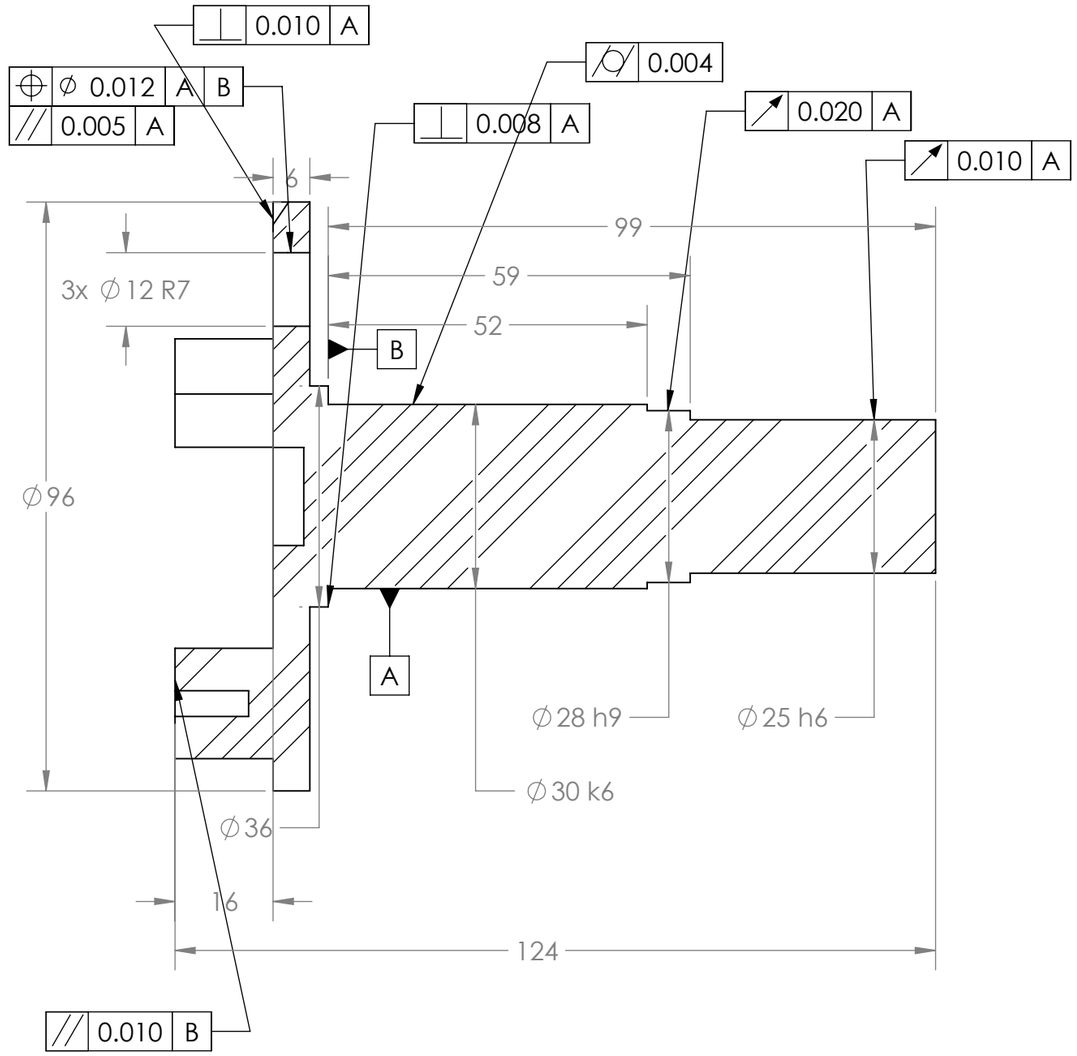

NOTES
1. 1.7225 (42CrMo4) +QT 280-320 HB; stress-relieve before finish grinding.
2. Dia 30 k6, dia 25 h6 ground Ra 0.4. Dia 28 h9 seal land plunge-ground Ra 0.2-0.5.
3. M30x1.5-6g, 44 to 52 from datum B. MB 6 groove 6 wide, M = 27.5.
4. 3 x dia 12 R7 on dia 67.5, 120 deg; finish-bore with cage bolted (D-024).
5. 3 x M5 tapped 12 deep in the bridges, on dia 67.5.
6. ISO 8015; ISO 2768-mK; unspecified edges 0.5 x 45 deg.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:		DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	
	NAME	SIGNATURE	DATE	TITLE:		
DRAWN				Output carrier, integral shaft		
CHK'D						
APPV'D						
MFG						
Q.A				MATERIAL:	DWG NO.	A3
				1.7225 (42CrMo4) +QT	PG25-305	
				WEIGHT: 0.87 kg	SCALE:1:1	SHEET 1 OF 1

SOLIDWORKS Educational Product. For Instructional Use Only.