
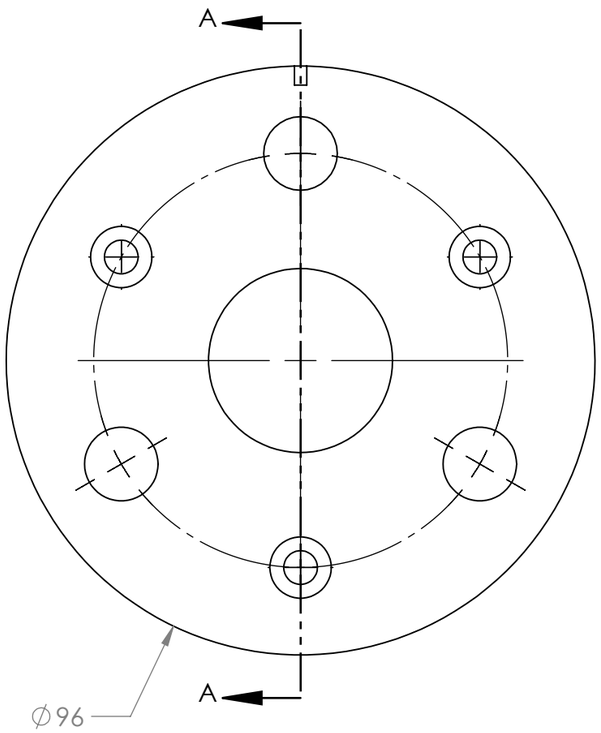


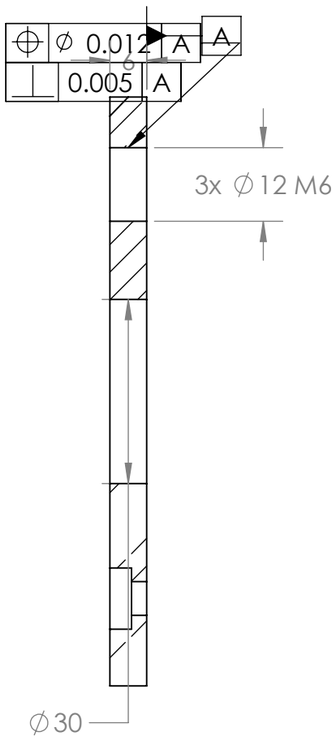

SECTION A-A

NOTES
1. 1.7225 (42CrMo4) +QT 280-320 HB.
2. 3 x dia 12 M6 pin bores on dia 67.5 at 120 deg (D-024); finish-bored with the cage bolted to PG25-305.
3. 3 x dia 5.5 through with dia 10 x 3.5 counterbore for DIN 7984 M5 x 10, on dia 67.5 between the pin bores (D-021).
4. Centre bore dia 30 clears the dia 26 spline hub by 2 mm radially.
5. Inner face Ra 0.8 (thrust washer face). ISO 8015; ISO 2768-mK.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING	REVISION
	NAME	SIGNATURE	DATE		TITLE:	
DRAWN					Carrier plate 2, input side	
CHK'D						
APPV'D						
MFG						
Q.A				MATERIAL:	DWG NO.	A3
				42CrMo4 +QT 280-320 HB	PG25-306	
				WEIGHT: 0.25 kg	SCALE:1:1	SHEET 1 OF 1

SOLIDWORKS Educational Product. For Instructional Use Only.