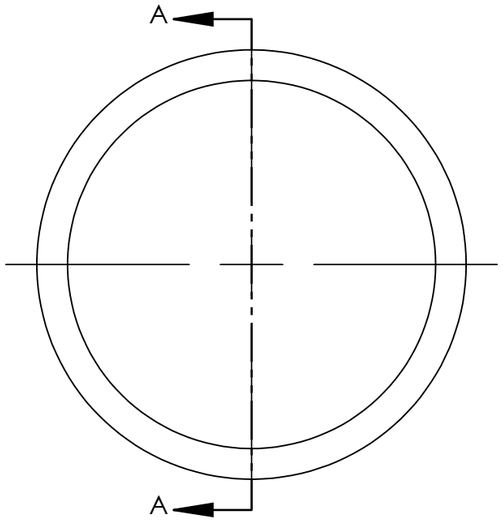

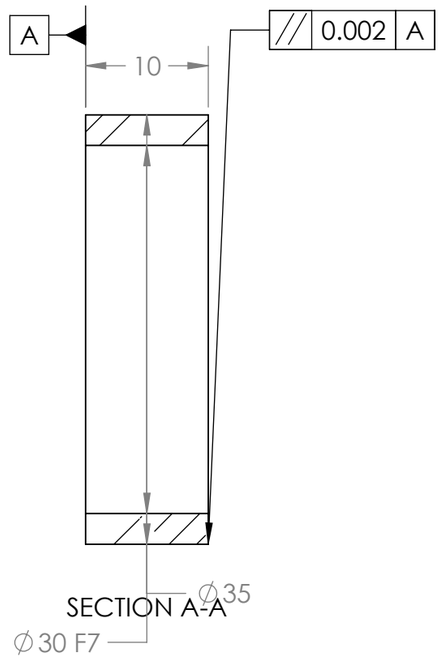

SECTION A-A

NOTES
1. 1.0503 (C45) +QT, faces ground parallel 0.002.
2. Width ground on assembly to the measured cup positions for 0-10 um axial preload of the 32006 X pair (D-028 / step 8).
3. Bore dia 30 F7 (slides over the k6 seat).
4. ISO 8015; ISO 2768-fH.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING	REVISION
	NAME	SIGNATURE	DATE		TITLE:	
DRAWN					Cone spacer, ground to setting	
CHK'D						
APPV'D						
MFG						
Q.A				MATERIAL: C45 +QT	DWG NO. PG25-401	A3
				WEIGHT: 0.02 kg	SCALE:2:1	SHEET 1 OF 1

SOLIDWORKS Educational Product. For Instructional Use Only.