
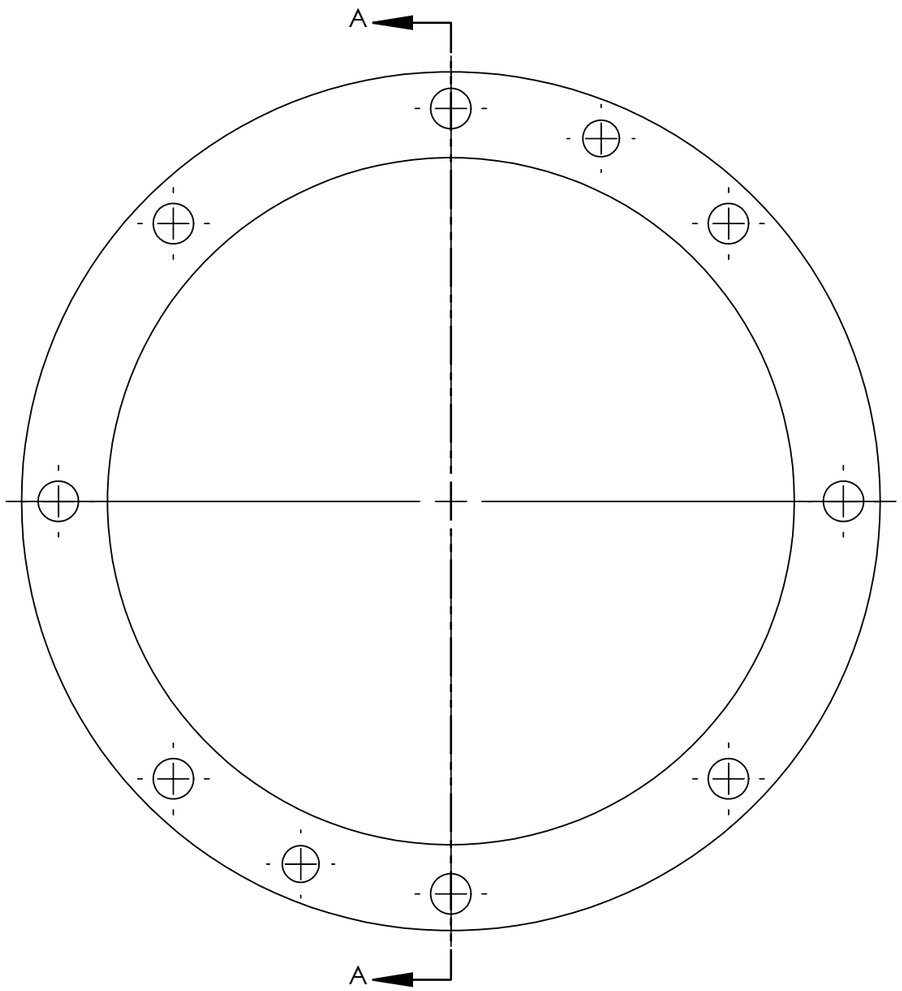


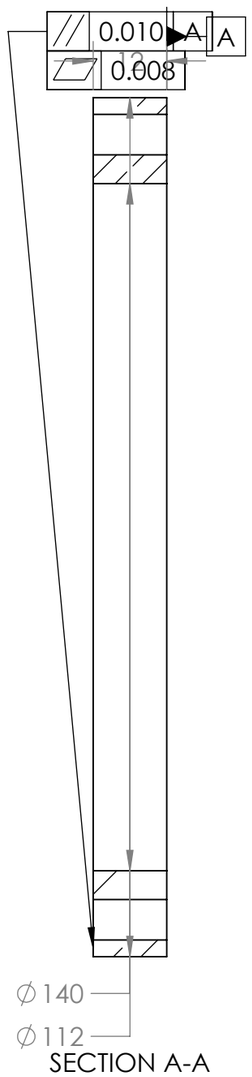

SECTION A-A

NOTES
1. 1.0503 (C45) +N. Faces parallel 0.010; both faces Ra 0.8 (joint faces, anaerobic sealant).
2. 8 x dia 6.6 through on dia 128 at 0 deg + n x 45 deg; 2 x dia 6 H7 at 67.5 / 247.5 deg, reamed with the stack.
3. Width 12 +/-0.01 (sets the interstage axial position).
4. ISO 8015; ISO 2768-mK; edges 0.3 x 45 deg.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:		DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	
	NAME	SIGNATURE	DATE	TITLE: Interstage spacer ring		
DRAWN						
CHK'D						
APPV'D						
MFG						
Q.A				MATERIAL: C45 +N	DWG NO. PG25-502	A3
				WEIGHT: 0.49 kg	SCALE:1:1	SHEET 1 OF 1

SOLIDWORKS Educational Product. For Instructional Use Only.