
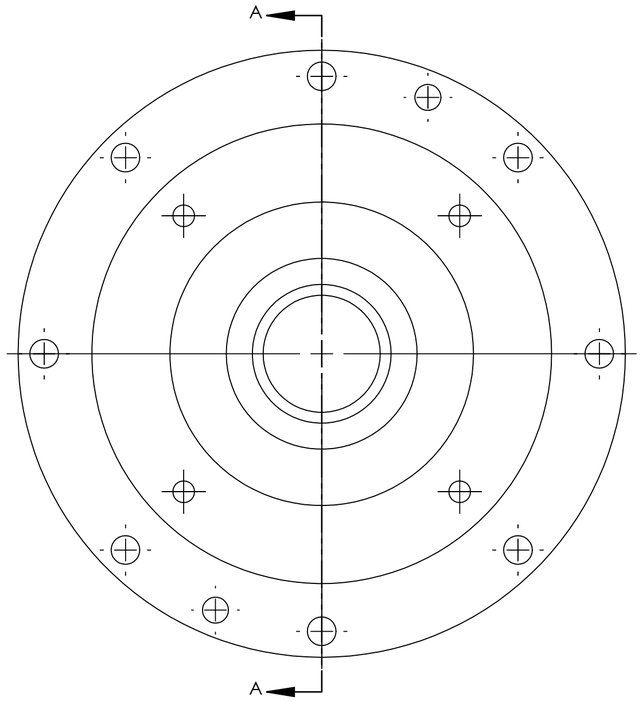


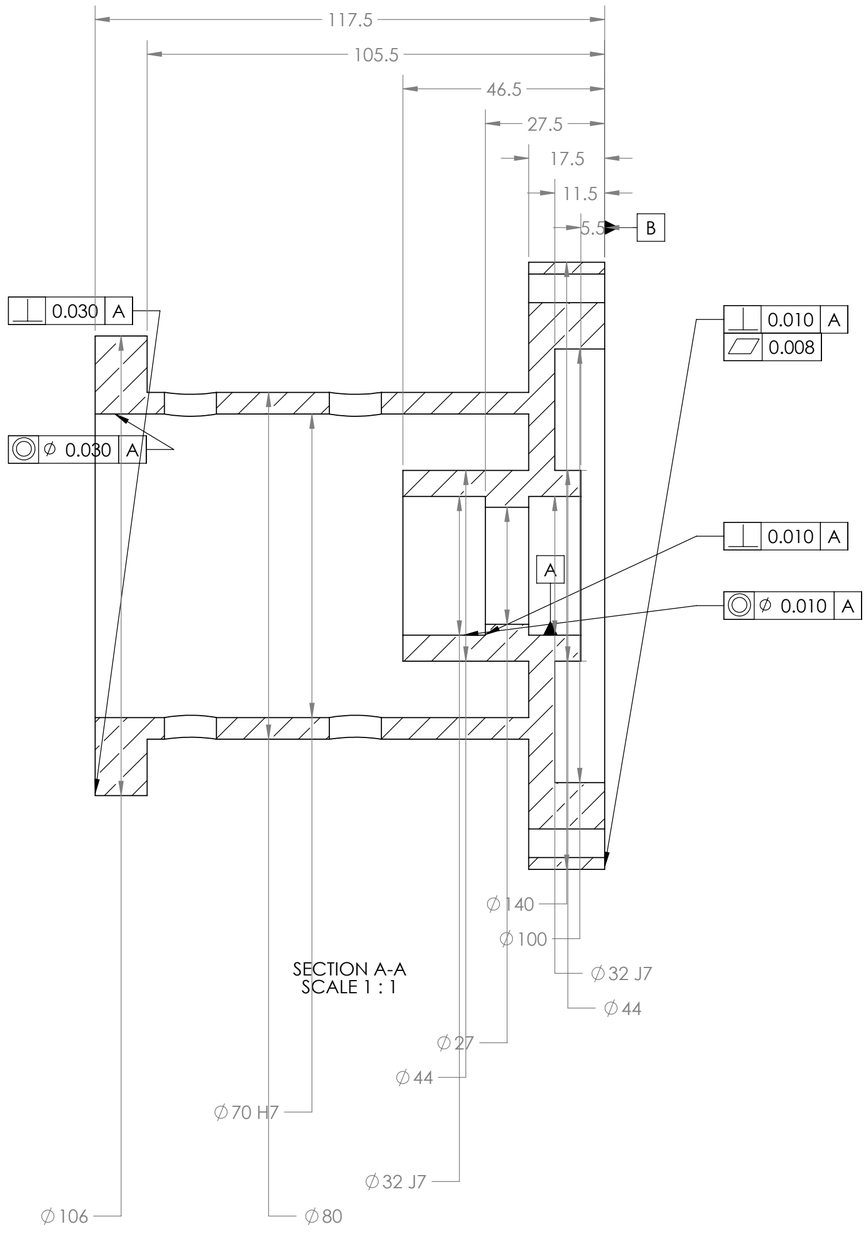

SECTION A-A
SCALE 1 : 1

NOTES
1. EN-GJS-500-7 (EN 1563), stress-relieved before machining. Paint outside, not on joint, seat or motor faces.
2. Dia 32 J7 bearing seats Ra 0.8; dia 32 bore from 39.5 to 46.5 from datum B is the seal seat (H8, Ra 1.6).
3. Dia 70 H7 motor spigot over the last 5 mm; the rest of the dia 70 chamber may be +0.2/0.
4. 8 x dia 6.6 through on dia 128 at 0 deg + n x 45 deg (tie bolts); 2 x dia 6 H7 at 67.5 / 247.5 deg, reamed with the stack.
5. Motor face: 4 x M6-6H x 12 deep on dia 90 at 45 deg + n x 90 deg (SGM7J-08A).
6. 2 x dia 12 coupling access holes, opposite, at 57.5 and 95.5 from datum B.
7. ISO 8015; general tolerances ISO 2768-mK; unspecified edges 0.5 x 45 deg.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:		DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	
	NAME	SIGNATURE	DATE	TITLE:		
DRAWN				Input housing / motor adapter		
CHK'D						
APPV'D						
MFG						
Q.A				DWG NO.		A2
				PG25-503		
			MATERIAL: EN-GJS-500-7			
			WEIGHT: 2.58 kg	SCALE:1:1	SHEET 1 OF 1	

SOLIDWORKS Educational Product. For Instructional Use Only.