


		 نسج الأبداء للاستشارات الهندسية NASO AL-EBDAA ENGINEERING CONSULTING		نموذج تقديم اعتماد مواد إنذار الحريق			
تاريخ نهاية العقد		1.375.641.5		قيمة العقد		توريد وتركيب وتشغيل أنظمة الإطفاء وإنذار الحريق لأحد المواقع التابعة لديوان رئاسة أمن الدولة بحافظة الطائف	
باسكو سيفتي		المقاول		مكتب نسج الأبداء للاستشارات الهندسية		رئاسة أمن الدولة	
الطائف		المالك		رئاسة أمن الدولة		موقع المشروع	
بيانات التقديم							
رقم التقديم		MAS-ELEC-05-R00		تاريخ التقديم		04/05/2026	
التصنيف		معماري		كهربائي		ميكانيكا	
نوع التقديم		مستند		مواد		مخططات	
الكود		الوصف		التسلل		الكود	
1		اسلاك إنارة ومخارج الطوارئ		10		الكود	
2		شركة Elsewedy		11		الكود	
3		الموديل CPD-F001-U06 2.5mm		12		الكود	
4		الاستلام		المقاول		الكود	
5		الختم		التوقيع		ممثل المقاول	
6		04/05/2026 م 17/11/1447 هـ		التاريخ		م. أحمد علي مصطفى	
7		04/05/2026 م 17/11/1447 هـ		التاريخ		م. أحمد علي مصطفى	
8		04/05/2026 م 17/11/1447 هـ		التاريخ		م. أحمد علي مصطفى	
9		04/05/2026 م 17/11/1447 هـ		التاريخ		م. أحمد علي مصطفى	
الملاحظات الفنية							
المواد أعلاه متوافقة للاستخدام الإنارة ومخارج الطوارئ ولا مانع من استبدالها بأدوات على تقنيات الشركة المصنعة كود البناء السعودي NFPA المرجحة المالكه باسكو والاستشارية يجب مراعاة تنفيذ هذه الأسلاك داخل أنابيب ومواصفات EMT يجب على المقاول التأكد من جودة نقل الكهرباء داخل الأسلاك.							
مدير المشروع							
التوقيع							
التاريخ							
9/5/2026							
مرفوض وبعد التقديم: C							
مقبول حسب الملاحظات: B							
مقبول: A							
الكود							
العدد							
المرفقات							
التاريخ							
ممثل المالك							
10							
9/5/2026							
يتعهد المقاول المذكور أعلاه بأنه قد راجع كافة تفاصيل التقديم وطبقها مع شروط ومواصفات ومخططات المشروع المعتمدة وأن هذه الموافقة لا تخلي مسؤوليته حسب متطلبات العقد							



POWER CABLES

PROVIDING SAFE ENERGY

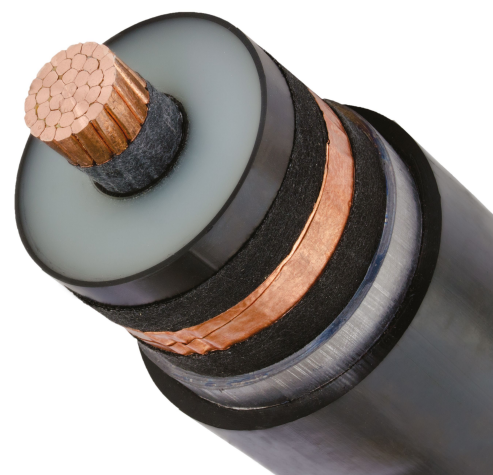



This catalogue provides technical information of overhead conductors and electrical power cables up to 220 kV, which helps our valued customers to select the desired cable for their needs.

The enclosed information guides customers to define the suitable cable design, voltage, ampacity, short circuit current in addition to approximate weight and dimension of the finished cable.



Index

05	General information & technical data
27	Overhead conductors
45	High Temperature Low Sag (HTLS) Conductors
57	Low Voltage Cables
109	Medium Voltage Cables
141	High & Extra High Voltage Cables
151	Handling & Laying Instruction
157	Type Test Approvals
161	Certifications
163	Our Partners
164	Elsewedy Cables Contacts



Elsewedy Electric

75 years ago, we started with a clear vision to position Elsewedy Electric for successful growth, inspired by innovation, determination and spirit of hardworking staff, empowered and liberated by a strong enterprise system.

Since Elsewedy Electric started, we made the decision to never sacrifice integrity for growth; this same motto did not change till today... Behind our success is a professional dedicated team and latest technologies which deliver comprehensive product portfolio and unmatched services. Elsewedy Electric always delivers top-rated products and services customers need with the best results they deserve. Our creative solutions help corporations and organizations to quickly adapt to new technologies that enhance business productivity and enable them to stay ahead of the competition.

At Elsewedy Electric, we focus on three pillars of sustainability: Human, Environment, and Technology. We are working to produce the best products and offer a wider selection of solutions in order to meet growing energy demands.

We are striving to reduce our impact on the environment, conserve natural resources, and reducing our operating costs in the process.

Our heritage, as an energy solutions provider, runs deep. What began with Elsewedy Cables more than 30 years ago and became Elsewedy Electric has transformed into a global diversified company with more than 10,000 employees and 30 production facilities.

We are one of the top Energy Solutions companies in Middle East and Africa operating in 5 diversified energy segments; Cables & Accessories, Electrical Products, Energy Measurement & Management, Transformers, Engineering & Construction.

We are proud of what we have achieved so far but recognize that there is much work to be done to meet the aggressive goals we have set for ourselves. Elsewedy Electric has the capacity and the will to lead. We will continue to work and fight for those things that make the world a better place.

We remain dedicated to penetrate new markets with a vision of providing the best products and services to our clients and shareholders and create a good working environment for our employees. That's Performance with purpose. That's what every business owner should strive for.



Elsewedy Cables

One of the major companies under the umbrella of Elsewedy Electric holding company; it is also considered the mother company of the Cables Segment.

Elsewedy Cables is one of the leading worldwide manufacturers producing a wide range of cable, wires, special cables, fire resistance cables, fiber optic cables, network cables, cables accessories and integrated solutions. The company has been able to maximize its commitment to improve efficiency by ensuring that its management possesses the expertise and talent necessary for the most critical business needs and has thus succeeded in maintaining a solid financial position.

Dedicating an area over 34316m² and more than 900 employees for serving the complete process of the instrumentation, control, fire alarm, fire resistant cables, coaxial, LAN cables and winding wires manufacturing. Our production facilities are among the most advanced in the region offering value added products, resulting in a total annual production capacities of 20,000 ton/ annum.







Low Voltage Cables

**Operating Voltage
(up to 1.8/3 kV)**

Cable Construction

1. Conductor

Copper or Aluminium conductors, solid, stranded or flexible with round or sectoral shaped conductors.

2. Insulation

An extruded layer of PVC or XLPE is applied over the conductor. PVC insulated cables are suitable for maximum conductor operating temperature of 70°C or 85°C and 90°C for XLPE.

3. Assembly

In case of multicore cables' cores are assembled together using non hygroscopic filler (if needed) to fill space between cores, wrapped with suitable binder tape to form a round cable.

4. Bedding

In case of armoured cables an extruded layer of PVC or other material is applied as bedding.

5. Armouring

- Steel Tape: Double layers of steel tapes are applied helically with gap.
- Steel Wire: Galvanized steel wires are applied helically.

6. Sheath



An extruded layer of PVC is applied as an outer sheath, or according to the client special requirements.

Option

Lead Sheath: Upon request a layer of lead is extruded over the bedding layer.

Armouring of Single Core Cable

- Armouring by non-magnetic material either Aluminium Tape or Aluminium Wire armouring to reduce the magnetic losses.
- If it is required for single core cable to be armoured by steel wire armouring, the magnetic circuit around the single core cable should be interrupted by inserting insulated copper wires between the steel wires.

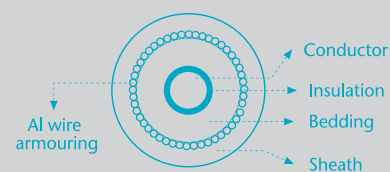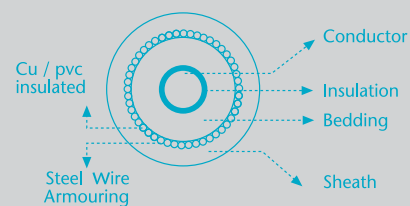

Armouring of Single Core Cable
Figure

450/750 V Indoor wires

Single Core Cables with Stranded Copper Conductors and PVC Insulated



Description

- Soft annealed stranded Copper conductors insulated with PVC compound rated 70 °C or 90 °C according to IEC 60227 & BS EN 50525-2-31.

Application

- For indoor fixed installations in dry locations, laid in conduits, as well as in steel support brackets.

Product - code	Nominal Cross Sectional Area	Max. Conductor Resistance		Current Rating in Air		Approx. Overall Diameter	Approx. Weight
		DC at 20 °C	AC at 70 °C	Free 	In Pipes 		
	mm ²	Ω/Km	Ω/Km	A	A	mm	Kg/Km
CPD-S001-U04	1.5 RE	12.1	14.6	20	15	2.8	20
CPD-T001-U04	1.5 RM	12.1	14.6	20	15	3	21
CPD-S001-U05	2 RE	9.15	10.9	22	17	3.2	27
CPD-T001-U05	2 RM	9.15	10.9	22	17	3.4	28
CPD-S001-U06	2.5 RE	7.41	8.89	28	22	3.4	31
CPD-T001-U06	2.5 RM	7.41	8.89	28	22	3.6	33
CPD-S001-U07	3 RE	6.1	7.41	31	24	3.6	36
CPD-T001-U07	3 RM	6.1	7.41	31	24	3.8	39
CPD-S001-U08	4 RE	4.61	5.51	37	26	3.9	46
CPD-T001-U08	4 RM	4.61	5.51	37	26	4.1	49
CPD-S001-U09	6 RE	3.08	3.68	46	33	4.4	66
CPD-T001-U09	6 RM	3.08	3.68	46	33	4.7	70
CPD-T001-U10	10 RM	1.83	2.17	66	47	5.8	109
CPD-T001-U11	16 RM	1.15	1.37	87	62	6.8	166
CPD-T001-U12	25	0.727	0.8600	118	81	8.8	278
CPD-T001-U13	35	0.524	0.6300	147	100	9.9	371
CPD-T001-U14	50	0.387	0.4600	197	122	11.8	514
CPD-T001-U15	70	0.268	0.3200	230	151	13.5	711
CPD-T001-U16	95	0.193	0.2300	289	191	15.7	967
CPD-T001-U17	120	0.153	0.1900	337	219	17.4	1240
CPD-T001-U18	150	0.124	0.1500	385	252	19.4	1500
CPD-T001-U19	185	0.0991	0.1200	449	288	21.5	1852
CPD-T001-U20	240	0.0754	0.0920	542	345	24.7	2457
CPD-T001-U30	300	0.0601	0.0750	621	391	27.2	2977

The above data is approximate and subjected to manufacturing tolerance.

re : round, Solid
rm : round, Stranded

Single Core Cables with Flexible Copper Conductors and PVC Insulated



Description

- Soft annealed Copper fine wires, bunched together in subunits or stranded bunched groups into a main units, which forms the flexible conductor. Insulated with soft PVC 70 °C or 90 °C Compound.
- Cables are produced according to IEC 60227 or BS EN 50525-2-31.

Application

- For indoor fixed installations in dry locations, where particular flexibility is required. For electrical panels connection or for electrical apparatus they can be laid in groups around steel sheets.

Product - code	Nominal Cross Sectional Area	Maximum Diameter of Wires	Max. Conductor Resistance		Current Rating in Air		Approx. Overall Diameter	Approx. Weight
			DC at 20 °C	AC at 70 °C	Free 	In Pipes 		
	mm ²	mm	Ω/Km	Ω/Km	A	A	mm	Kg/Km
CPD-F001-U04	1.5	0.26	13.3	15.9	20	15	3	20
CPD-F001-U06	2.5	0.26	7.98	9.56	28	22	3.7	31
CPD-F001-U08	4	0.31	4.95	5.93	37	26	4.2	44
CPD-F001-U09	6	0.31	3.3	3.95	46	33	4.7	62
CPD-F001-U10	10	0.41	1.91	2.29	66	47	6.2	108
CPD-F001-U11	16	0.41	1.21	1.45	87	62	7.2	162
CPD-F001-U12	25	0.41	0.78	0.9400	118	81	9.5	276
CPD-F001-U13	35	0.41	0.554	0.6630	147	100	11.0	375
CPD-F001-U14	50	0.41	0.386	0.4620	179	122	12.6	542
CPD-F001-U15	70	0.51	0.272	0.3260	230	151	14.6	733
CPD-F001-U16	95	0.51	0.206	0.2470	289	191	16.8	957
CPD-F001-U17	120	0.51	0.161	0.1930	337	219	18.9	1243
CPD-F001-U18	150	0.51	0.129	0.1550	385	252	21.2	1548
CPD-F001-U19	185	0.51	0.106	0.1270	449	288	23.4	1895
CPD-F001-U20	240	0.51	0.0801	0.0960	542	345	26.7	2400

The above data is approximate and subjected to manufacturing tolerance.