


Bill Recycle Module

8. Replacing Center Transport Lower MODULE (CF31/CF32)

- Open the system door and take out the BMD.
- Pull the handle of BMD (Lower) and take it forward.
- Disassemble M3 screw (1) (1ea) and separate the MOLD_D45X7H_BMD.
- Disassemble M4 screw (2) (2ea).
- Disassemble M4 screw (3) (3ea) of the rear and separate CF31/CF32 in the direction of arrow.
Be careful for the disconnection / being stabbed of connector cable at this time.

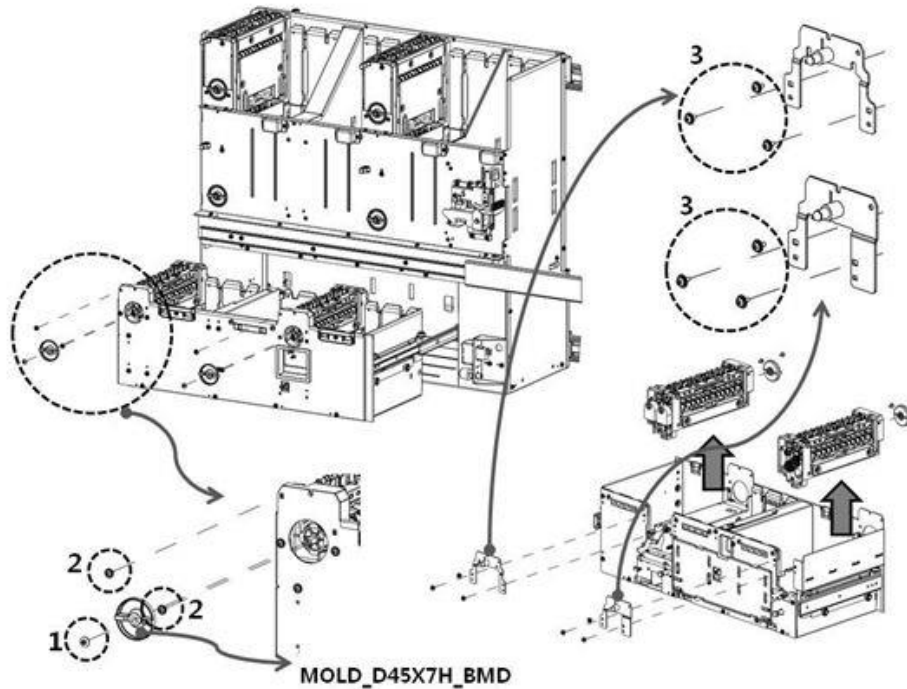

- Use the reverse order of disassembling to assemble again.
- Turn the knob with the hand to check the proper TORQUE maintained after assembling.