


Bill Recycle Module

6. Replacing the Center Transport Upper Module (CF11/CF12)

- Open the system door and take out the BMD.
- Disassemble the cable connector in the direction of arrow.
- Disassemble M3 screw (1) (2ea) / M3 screw (1) (2ea) and separate the COVER_FRAME_UP.
- Disassemble M4 screw (3) (1ea) and disassemble Center Transport(CF11/CF12) in the direction of arrow.

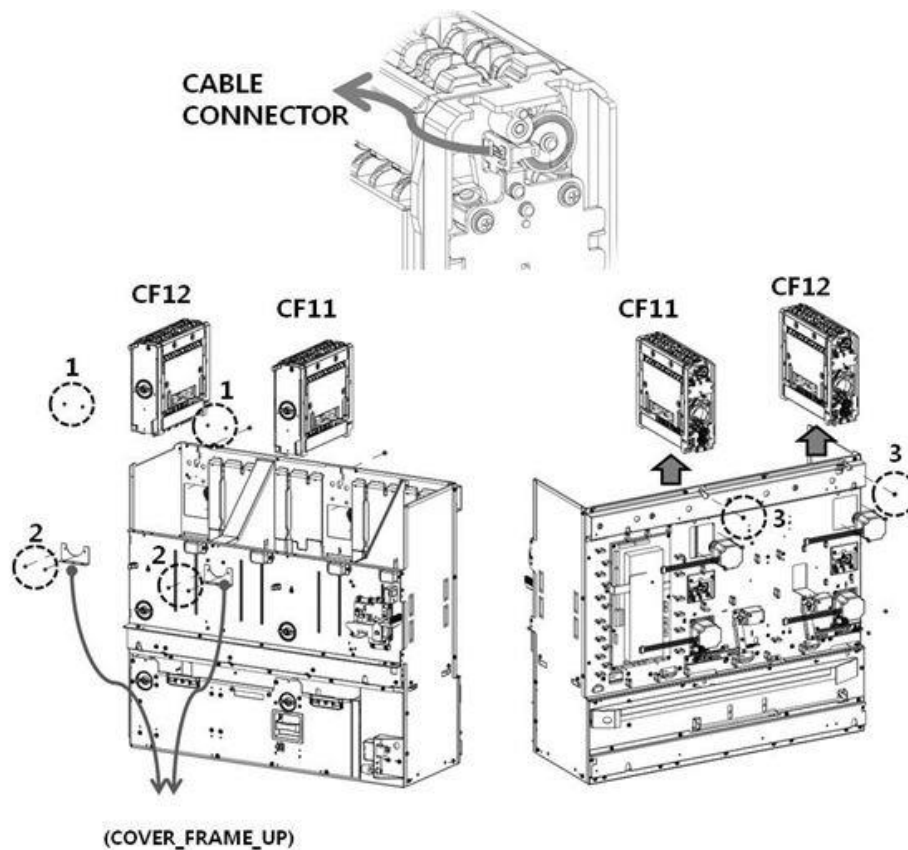

- Use the reverse order of disassembling to assemble again.
- Turn the knob with the hand to check the proper TORQUE maintained after assembling.