

Philips Components

Document No.	853-0653
ECN No.	99799
Date of Issue	June 14, 1990
Status	Product Specification
ECL Products	

10118

Gate

Dual 2-Wide 3-Input OR-AND Gate

FEATURES

- Typical propagation delay: 2.3ns
- Typical supply current ($-I_{EE}$): 20mA

DESCRIPTION

The 10118 is a dual 2-Wide 3-Input OR-AND Gate designed for use in data control as a general purpose logic element. All unused inputs can be left open due to integrated pull-down resistors, which avoid the need for a supply voltage.


ORDERING INFORMATION

DESCRIPTION	ORDER CODE
16-Pin Plastic DIP	10118N
16-Pin Ceramic DIP	10118F


PIN DESCRIPTION

PINS	DESCRIPTION
$D_0 - D_{10}$	Data Inputs
Q_0, Q_1	Data Outputs


PIN CONFIGURATION



LOGIC DIAGRAM

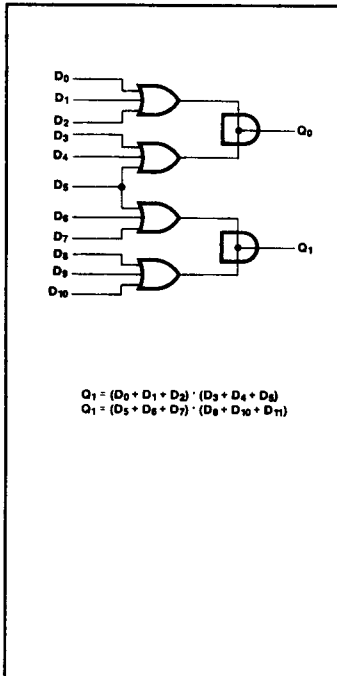

SIMPLIFIED SCHEMATIC

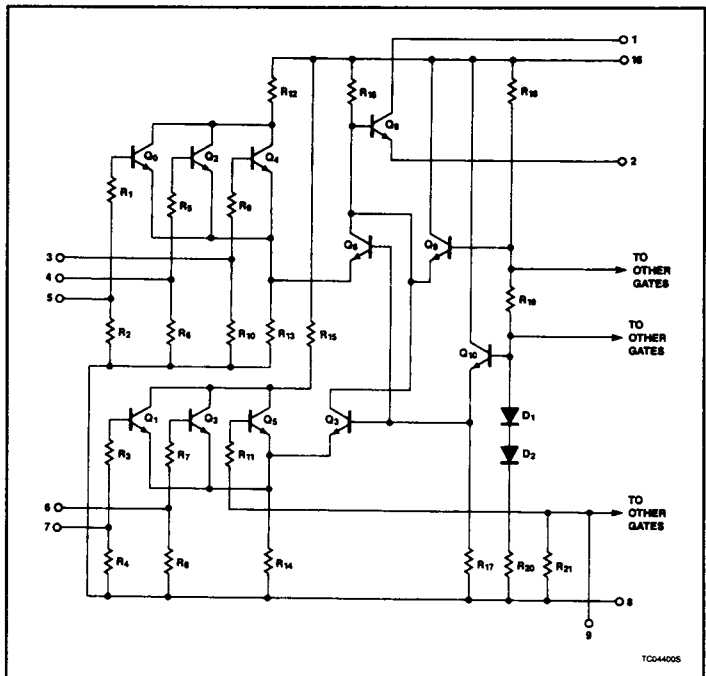

Gate

10118

ABSOLUTE MAXIMUM RATINGS

SYMBOL	PARAMETER	LIMITS	UNIT
V_{EE}	Supply voltage	-8.0	V
V_{IN}	Input voltage (V_{IN} should never be more negative than V_{EE})	0 to V_{EE}	V
I_O	Output source current (continuous)	-50	mA
T_S	Storage temperature range	-55 to +150	°C
T_J	Maximum junction temperature	Ceramic Package	+165
		Plastic Package	+150

NOTE:

Operation beyond the limits set forth in this table may impair the useful life of the device. Unless otherwise noted, these limits are specified over the operating ambient temperature range.

DC OPERATING CONDITIONS

SYMBOL	PARAMETER	TEST CONDITIONS	LIMITS			UNIT
			MIN.	NOM.	MAX.	
V_{CC1}, V_{CC2}	Circuit ground		0	0	0	V
V_{EE}	Supply voltage (negative)			-5.2		V
V_{IH}	High level input voltage	$T_A = -30^\circ\text{C}$			-890	mV
		$T_A = +25^\circ\text{C}$			-810	mV
		$T_A = +85^\circ\text{C}$			-700	mV
V_{IHT}	High level input threshold voltage	$T_A = -30^\circ\text{C}$	-1205			mV
		$T_A = +25^\circ\text{C}$	-1105			mV
		$T_A = +85^\circ\text{C}$	-1035			mV
V_{ILT}	Low level input threshold voltage	$T_A = -30^\circ\text{C}$			-1500	mV
		$T_A = +25^\circ\text{C}$			-1475	mV
		$T_A = +85^\circ\text{C}$			-1440	mV
V_{IL}	Low level input voltage	$T_A = -30^\circ\text{C}$	-1890			mV
		$T_A = +25^\circ\text{C}$	-1850			mV
		$T_A = +85^\circ\text{C}$	-1825			mV
T_A	Operating ambient temperature range		-30	+25	+85	°C

NOTE:

When operating at other than the specified V_{EE} voltage (-5.2V), the DC and AC Electrical Characteristics will vary slightly from specified values.

Gate

10118

DC ELECTRICAL CHARACTERISTICS $V_{CC1} = V_{CC2} = \text{ground}$, $V_{EE} = -5.2V \pm 0.010V$, $T_A = -30^\circ\text{C}$ to $+85^\circ\text{C}$ output loading 50Ω to $-2.0V \pm 0.010V$ unless otherwise specified^{1,3}

SYMBOL		PARAMETER		TEST CONDITIONS ²		LIMITS			UNIT
						MIN.	TYP.	MAX.	
V _{OH}	High level output voltage	T _A = -30°C	Apply V _{IHMAX} to all inputs.	-1060		-890	mV		
		T _A = +25°C		-960		-810	mV		
		T _A = +85°C		-890		-700	mV		
V _{OHT}	High level output threshold voltage	T _A = -30°C	For Q ₀ output, apply V _{HIT} to D ₀ input with	-1080			mV		
		T _A = +25°C	V _{ILMIN} applied to D ₁ and D ₂ inputs and	-980			mV		
		T _A = +85°C	V _{IHMAX} applied to all other inputs.	-910			mV		
V _{OLT}	Low level output threshold voltage	T _A = -30°C	For Q ₀ output, apply V _{ILT} to D ₀ input with			-1655	mV		
		T _A = +25°C	V _{ILMIN} applied to D ₁ and D ₂ inputs and			-1630	mV		
		T _A = +85°C	V _{IHMAX} applied to all other inputs.			-1595	mV		
V _{OL}	Low level output voltage	T _A = -30°C	Apply V _{ILMIN} to all inputs.	-2000		-1675	mV		
		T _A = +25°C		-1990		-1650	mV		
		T _A = +85°C		-1920		-1615	mV		
I _{IH}	High level input current	D ₅ input	Apply V _{IHMAX} to each input under test, one at a time, with V _{ILMIN} applied to all other inputs.			560	μA		
				T _A = -30°C			350	μA	
		All other inputs		T _A = +25°C			350	μA	
				T _A = +85°C			390	μA	
				T _A = -30°C			245	μA	
				T _A = +25°C			245	μA	
I _{IL}	Low level input current	T _A = -30°C	Apply V _{ILMIN} to each input under	0.5			μA		
		T _A = +25°C	test, one at a time, with V _{IHMAX}	0.5			μA		
		T _A = +85°C	applied to all other inputs.	0.3			μA		
-I _{EE}	V _{EE} supply current	T _A = -30°C				29	mA		
		T _A = +25°C			20	26	mA		
		T _A = +85°C				29	mA		
$\frac{\Delta V_{OH}}{\Delta V_{EE}}$	High level output voltage compensation	T _A = +25°C				0.016		V/V	
$\frac{\Delta V_{OL}}{\Delta V_{EE}}$	Low level output voltage compensation					0.250		V/V	
$\frac{\Delta V_{BB}}{\Delta V_{EE}}$	Reference bias voltage compensation					0.148		V/V	

NOTES:

- The specified limits represent the worst case values for the parameter. Since these worst case values normally occur at the supply voltage and temperature extremes, additional noise immunity can be achieved by decreasing the allowable operating condition ranges.
- Conditions for testing shown in the tables are not necessarily worst case. For worst case testing guidelines, refer to DC Testing, Chapter 1, Section 3.
- The specified limits shown in the DC Electrical Characteristics table can be met only after thermal equilibrium has been established. Thermal equilibrium is established by applying power for at least 2 minutes, while maintaining transverse airflow of 2.5 meters/sec (500 linear feet/min) over the device, mounted either in a test socket or on a printed circuit board. Test voltage values are given in the DC Operating Conditions table.

Gate**10118****AC ELECTRICAL CHARACTERISTICS** $V_{CC1} = V_{CC2} = \text{ground}$, $V_{EE} = -5.2V \pm 0.010V$

SYMBOL	PARAMETER	TEST CONDITION	LIMITS								UNIT
			T _A = -30°C		T _A = +25°C			T _A = +85°C			
			MIN.	MAX.	MIN.	TYP.	MAX.	MIN.	MAX.		
t _{PLH} t _{PHL}	Propagation delay D _n to Q _n	Waveform 1	1.40 1.40	3.90 3.90	1.40 1.40	2.30 2.30	3.40 3.40	1.40 1.40	3.80 3.80	ns ns	
t _{TLH} t _{THL}	Transition time 20% to 80%, 80% to 20%	Waveform 1	0.80 0.80	4.10 4.10	1.50 1.50	2.50 2.50	4.00 4.00	1.50 1.50	4.60 4.60	ns ns	

NOTE:

For AC test setup information, see AC Testing, Chapter 2, Section 3.