



**Haynes**  
shows you how

**BMW 3-Series and Z4 (99-05) Includes 2006 325ci/330ci Coupe and Convertible models Haynes Online Manual.**

## 18 Radio unit - removal and installation

### Note:

The following removal and installation procedure is for the range of standard equipment radio/cassette/CD units. Removal and installation procedures of non-standard units will differ slightly.

- 1 Disconnect the cable from the negative terminal of the battery (see [Chapter 5, Section 1](#)).

## Removal

### Dash-mounted unit

- 2 Using a wooden or plastic lever, carefully pry away the decorative trim above the passenger side glove box, followed by the trim above the radio unit.


- 3 Remove the two screws and pull the unit from the dash (see illustration) .

**18.3 Remove the two screws that secure the radio unit**



- 4 Note their installed positions, and disconnect the wiring connectors from the rear of the unit (slide out the locking element on the main connector) (see illustration) .

#### 18.4 Slide out the locking element and disconnect the wiring connector

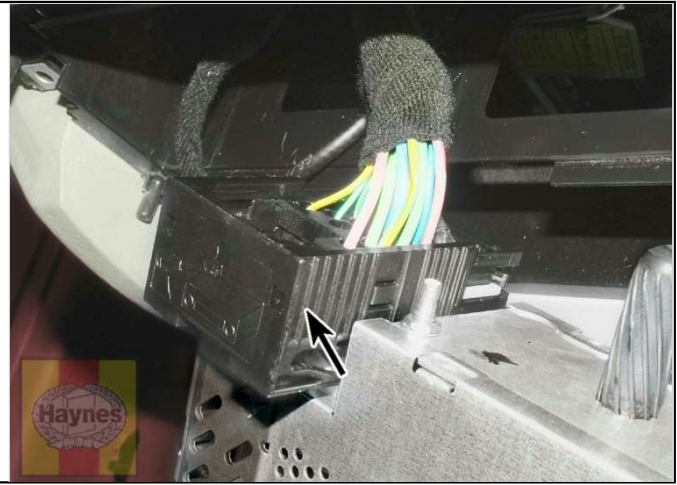

### CD autochanger

5 Remove the left-hand side luggage compartment trim panel as described in [Chapter 11, Section 27](#).

6 Loosen the four mounting screws, and lift the unit from position (see illustration) . Disconnect the wiring connectors as the unit is withdrawn.

#### 18.6 The CD autochanger is retained by these four screws




### Amplifier

7 The amplifier (on models so equipped) is located behind the left-hand side luggage compartment trim panel. Press the button, and remove the first aid kit trim panel.

8 Remove the storage/tool kit tray.

9 Disconnect the amplifier wiring connectors, remove the retaining bolts and remove the unit (see illustration) .

**18.9 The amplifier is retained by two bolts  
- Sport Wagon model**

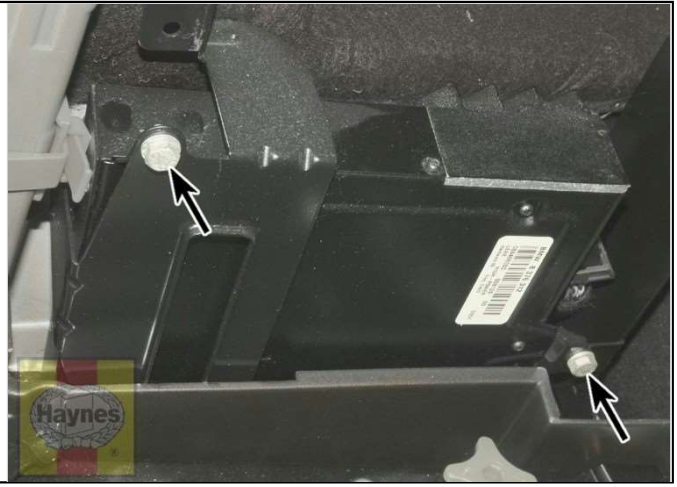

## Installation

10 Installation is the reverse of removal.

© 2024 Haynes Manuals, Inc. Contact us