MC1668

DUAL CLOCKED LATCH

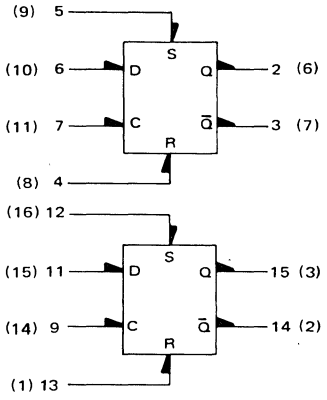



L SUFFIX
CERAMIC PACKAGE
CASE 620



F SUFFIX
CERAMIC PACKAGE
CASE 650

TRUTH TABLE

S	R	D	C	Q_{n+1}
0	0	ϕ	0	Q_n
1	0	ϕ	0	1
0	1	ϕ	0	0
1	1	ϕ	0	**
ϕ	ϕ	0	1	0
ϕ	ϕ	1	1	1

**Output state not defined ϕ = Don't Care

V_{CC1} = Pin 1 (5)
V_{CC2} = Pin 16 (4)
V_{EE} = Pin 8 (12)

t_{pd} = 1.6 ns typ (510-ohm load)
= 1.8 ns typ (50-ohm load)
P_D = 220 mW typ/pkg (No load)

Number at end of terminal denotes pin number for L package
Number in parenthesis denotes pin number for F package

Characteristic	Symbol	−30°C Min	−30°C Max	+25°C Min	+25°C Max	+85°C Min	+85°C Max	Unit
Power Supply Drain Current	I_E	–	–	–	55	–	–	mAdc
Input Current	I_{inH}							μAdc
Data, Set, Reset		–	–	–	370	–	–	
Clock		–	–	–	225	–	–	
Switching Times								ns
Propagation Delay	t_{pd}							
Clock		1.0	2.7	1.0	2.5	1.1	2.8	
Set, Reset		1.0	2.5	1.0	2.3	1.1	2.7	
Rise Time (10% to 90%)	t+	0.8	2.8	0.9	2.5	0.9	2.9	ns
Fall Time (10% to 90%)	t-	0.5	2.4	0.5	2.2	0.5	2.6	ns