


MC1660

DUAL 4-INPUT GATE

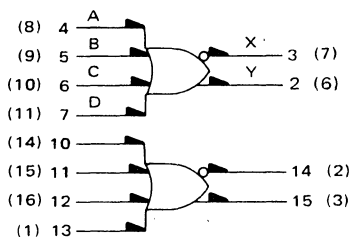


$$X = \overline{A + B + C + D}$$

$$Y = A + B + C + D$$


V_{CC1} = Pin 1 (5)
 V_{CC2} = Pin 16 (4)
 V_{EE} = Pin 8 (12)

t_{pd} = 0.9 ns typ (510-ohm load)
 = 1.1 ns typ (50-ohm load)

P_D = 120 mW typ/pkg (No load)
 Full Load Current, I_L = -25 mAdc max.



L SUFFIX
 CERAMIC PACKAGE
 CASE 620



F SUFFIX
 CERAMIC PACKAGE
 CASE 650

Numbers at ends of terminals denote pin numbers for L package
 Numbers in parenthesis denote pin numbers for F package

Characteristic	Symbol	-30°C		+25°C		+85°C		Unit
		Min	Max	Min	Max	Min	Max	
Power Supply Drain Current	I_E	—	—	—	28	—	—	mAdc
Input Current	I_{inH}	—	—	—	350	—	—	μ Adc
Switching Times								ns
Propagation Delay	t^{+-}	0.6	1.8	0.6	1.7	0.6	1.9	
	t^{-+}	0.6	1.6	0.6	1.5	0.6	1.7	
Rise Time, Fall Time (10% to 90%)	t^+, t^-	0.6	2.2	0.6	2.1	0.6	2.3	ns