



MC1690

UHF PRESCALER TYPE D FLIP-FLOP

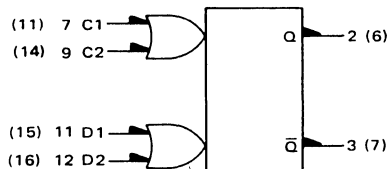

TRUTH TABLE


C	D	Q_{n+1}
L	ϕ	Q_n
H	ϕ	Q_n
	L	L
	H	H

C = C1 + C2
D = D1 + D2

ϕ = Don't Care

V_{CC1} = Pin 1 (5)
 V_{CC2} = Pin 16 (4)
 V_{EE} = Pin 8 (12)

P_D = 200 mW typ/pkg (No Load)
 f_{Tog} = 500 MHz min



Number at end of terminal denotes pin number for L package
Number in parenthesis denotes pin number for F package

4

Characteristic	Symbol	-30°C		+25°C		+85°C		Unit
		Min	Max	Min	Max	Min	Max	
Power Supply Drain Current	I_E	—	—	—	59	—	—	mAdc
Input Current	I_{inH}	—	—	—	250	—	—	μ Adc
Pins 7,9		—	—	—	270	—	—	
Pins 11,12		—	—	—		—	—	
Switching Times				Min	Typ	Max		ns
Propagation Delay	t_{pd}	—	—	—	1.5	—	—	
Rise Time, Fall Time (10% to 90%)	t_r, t_f	—	—	—	1.3	—	—	ns
Setup Time	t_{setup}	—	—	—	0.3	—	—	ns
Hold Time	t_{hold}	—	—	—	0.3	—	—	
Toggle Frequency	f_{Tog}	500	—	500	540	—	500	MHz

