

Printer Dover

Spruce version 11.2 -- spooler version 11.2

File: BaseBd-Rev-Am.sil etc.

Creation date: 30-Apr-81 10:40:33

For: Spruce

19 total sheets = 18 pages, 1 copy.

Problems encountered:

Font HELVETICA24B substituted for font HELVE24.

Not impl.: brightness, hue, saturation, show-object, show-dots-opaque, dots from files.

Not impl.: brightness, hue, saturation, show-object, show-dots-opaque, dots from files.

Not impl.: brightness, hue, saturation, show-object, show-dots-opaque, dots from files.

Not impl.: brightness, hue, saturation, show-object, show-dots-opaque, dots from files.

Not impl.: brightness, hue, saturation, show-object, show-dots-opaque, dots from files.

Not impl.: brightness, hue, saturation, show-object, show-dots-opaque, dots from files.



Character code 157b not found in font Gates32.

DORADO SCHEMATICS




Base Board




Table of contents


<u>TITLE</u>	<u>Page</u>
Microcomputer and EPROMS _____	01
RAM, Timers and I/O pins _____	02
CP Bus & Mux and RCPBus _____	03
Muffler and Manifold _____	04
Alto Control Bus Receivers _____	05
Alto Control Bus Drivers _____	06
Prototype Ram Module _____	07
CP Bus Handoff and Watchdog Timer _____	09
Clk Generator Ref. & Freq Comp _____	10
Clk Generator Loop Filter and VCO _____	11
Clk Generator & Backpanel Distributor _____	12
DAC and Current/Voltage Sensing _____	13
Temp Sense, PwrOn, & LED Ckts _____	14
Additional EPROMS & 7 Wire Interface _____	15
Layout _____	16
Loading Information _____	17












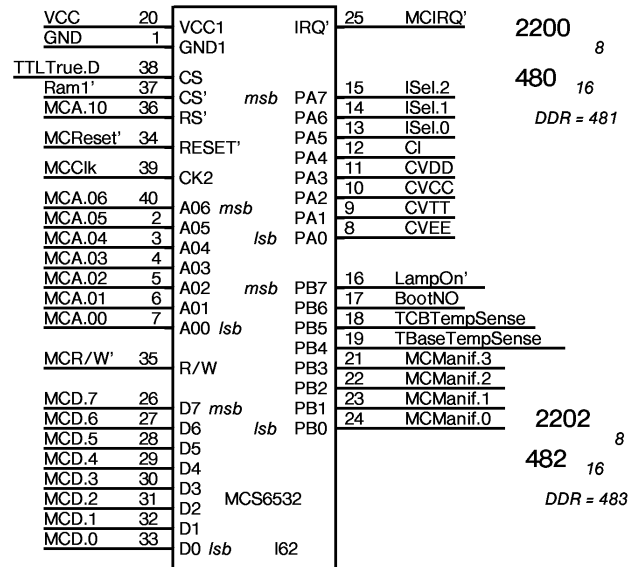
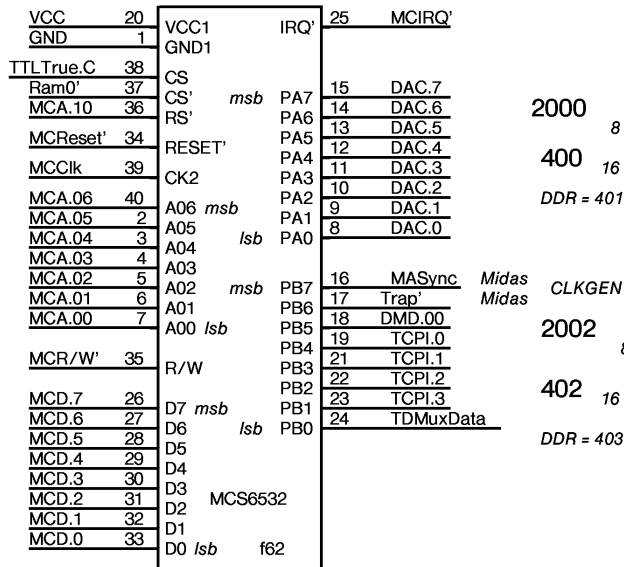


Basic Ram covers [0 , 1FF]

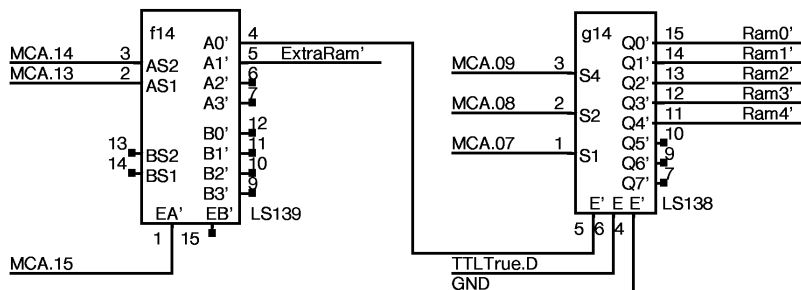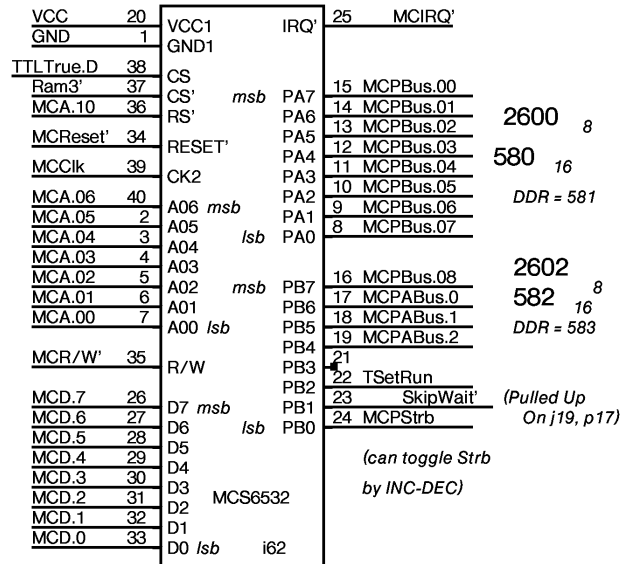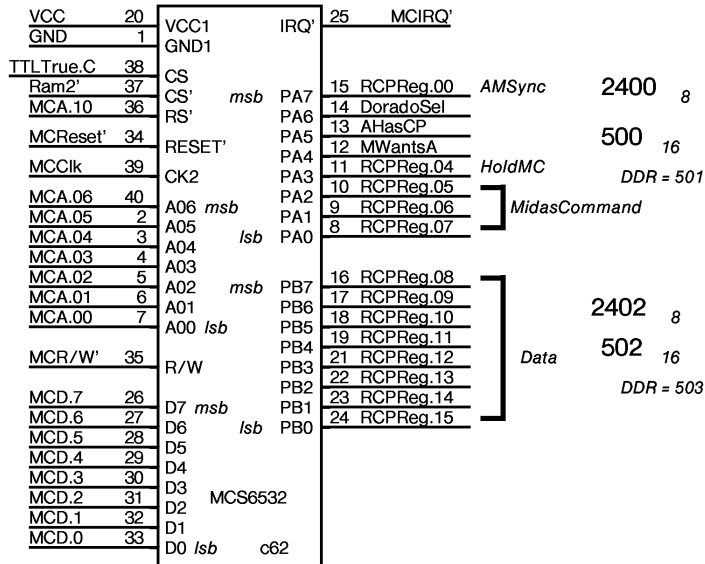


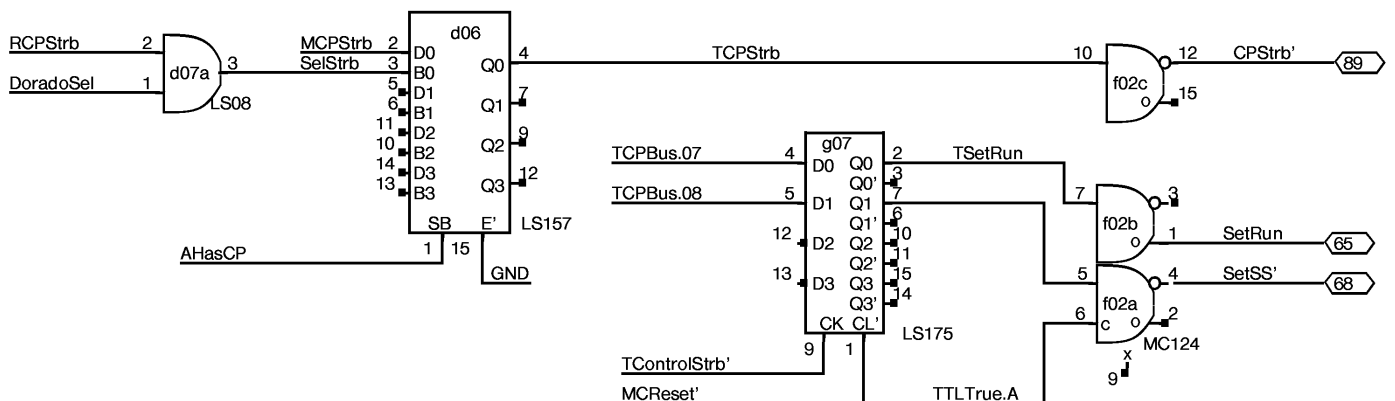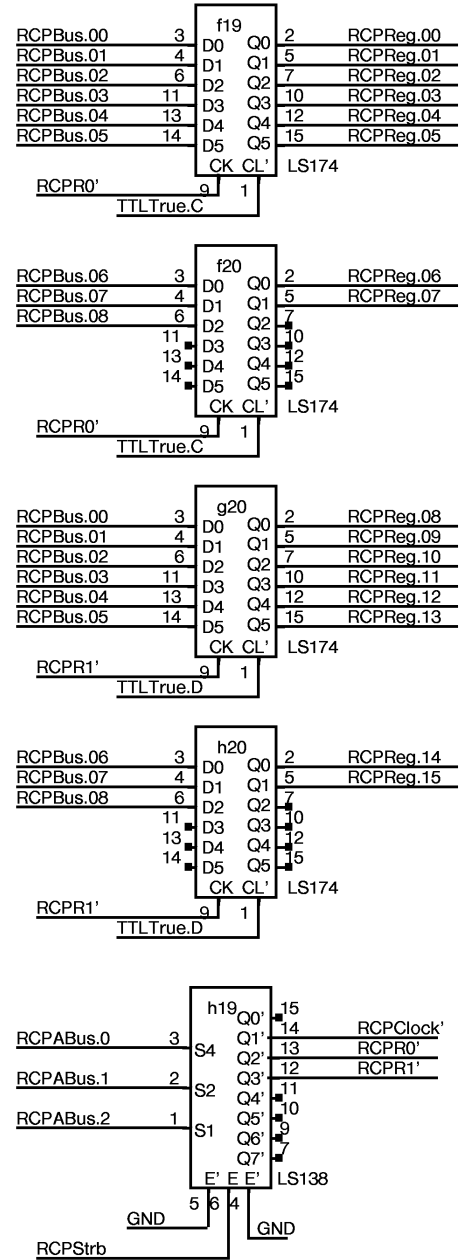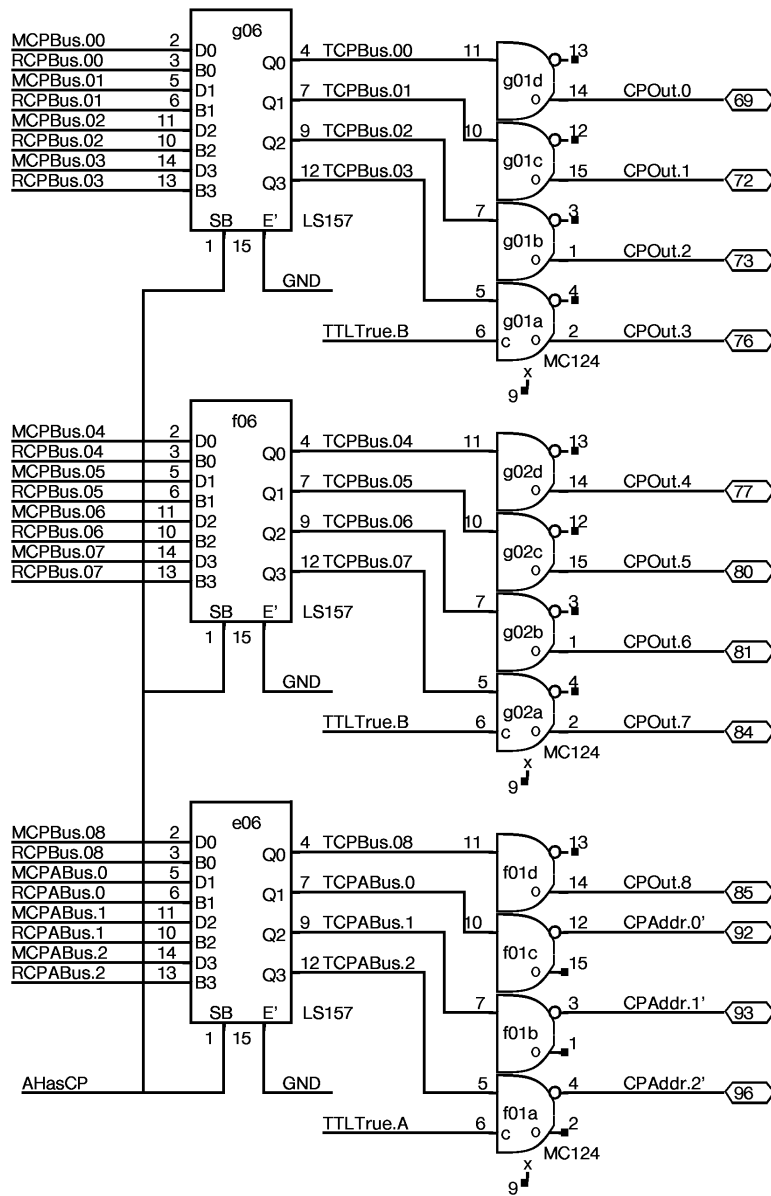


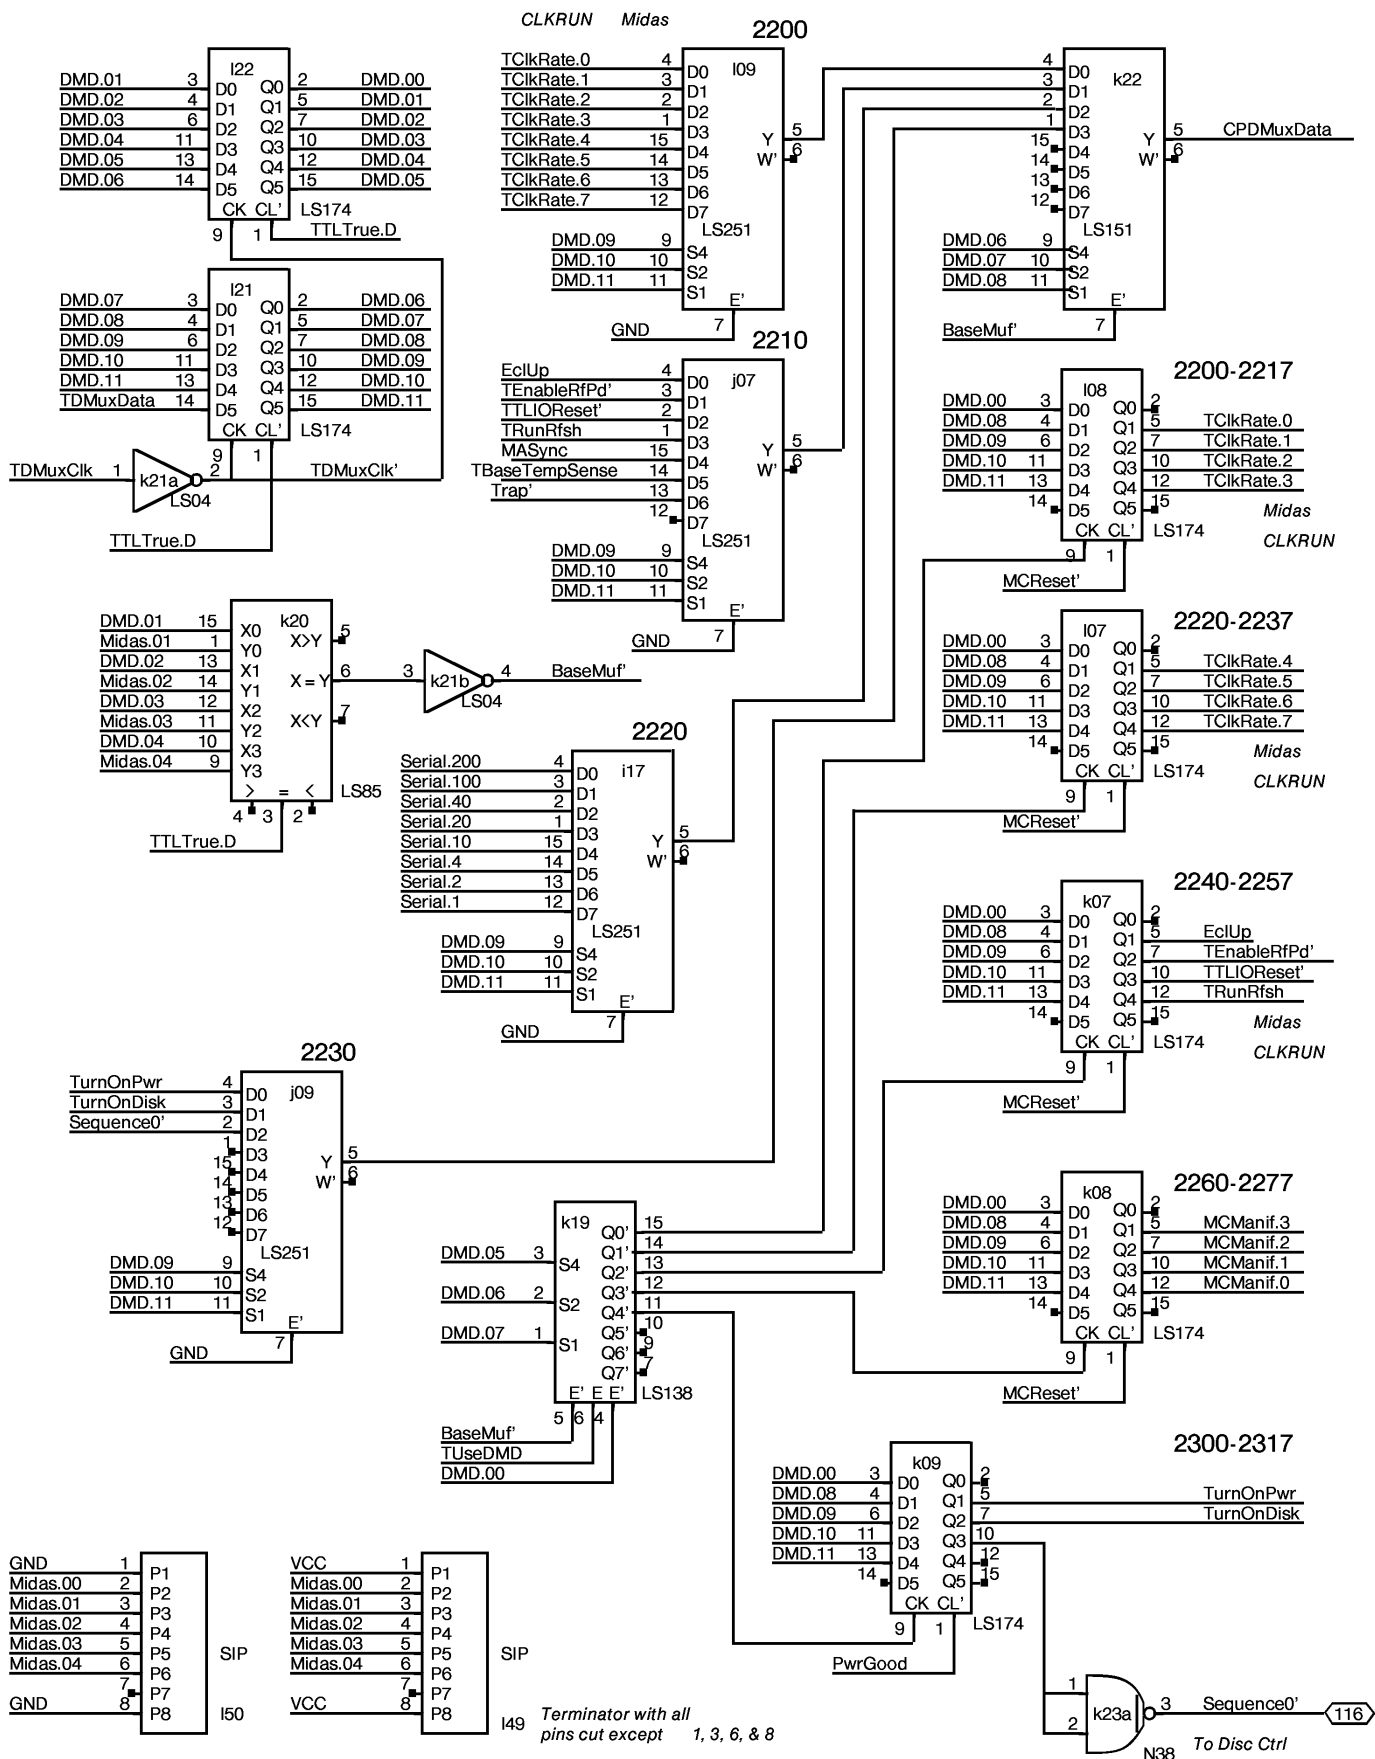













Copy of Clock Register



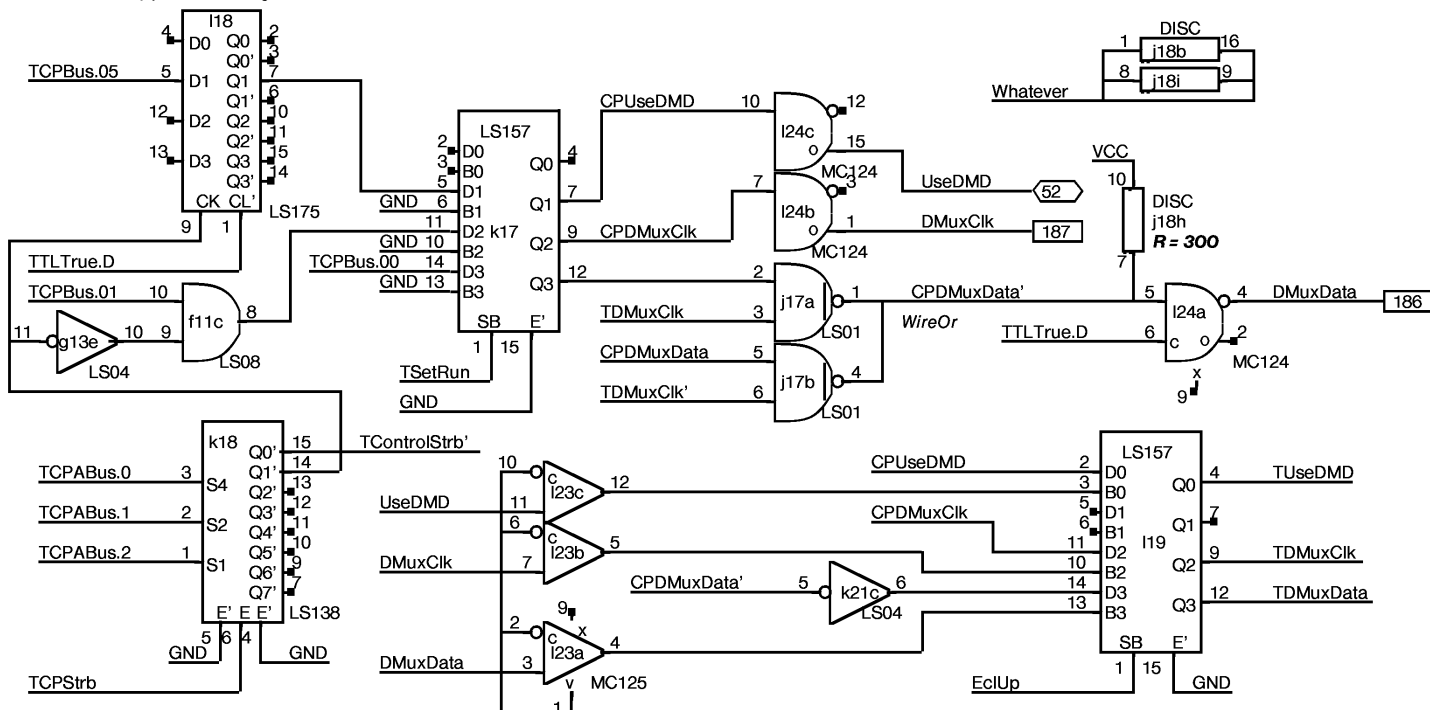



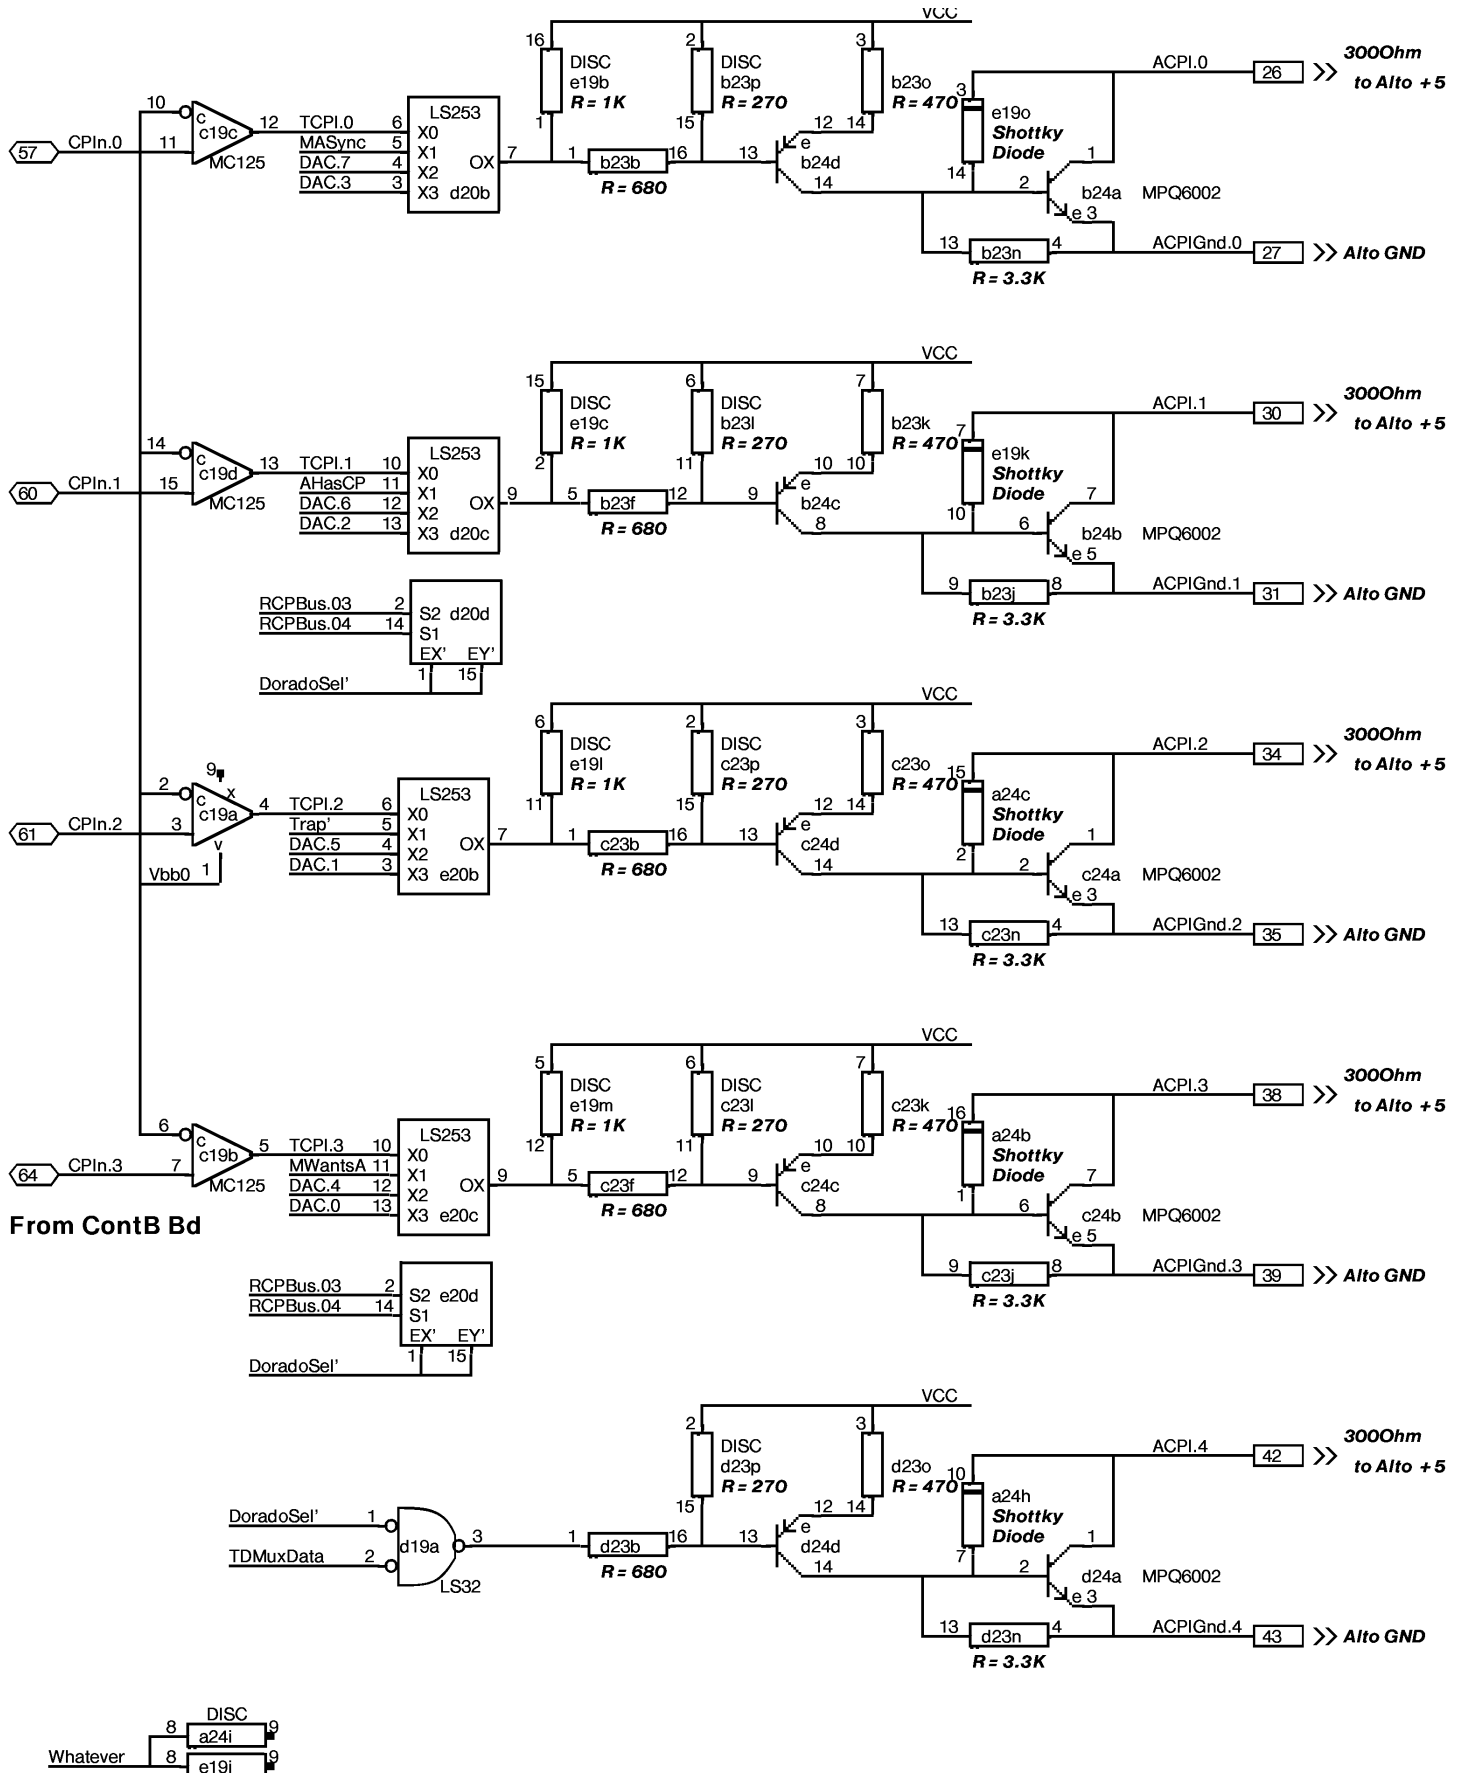


RAMS ARE OPTIONAL

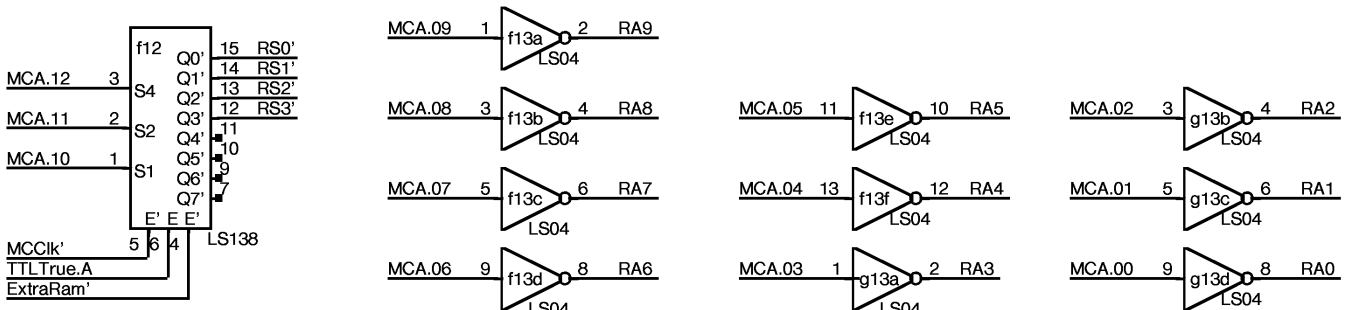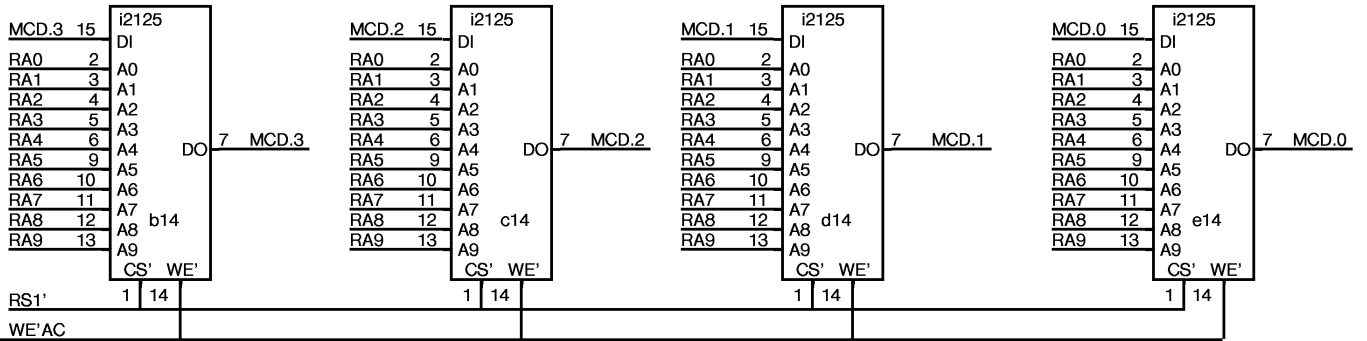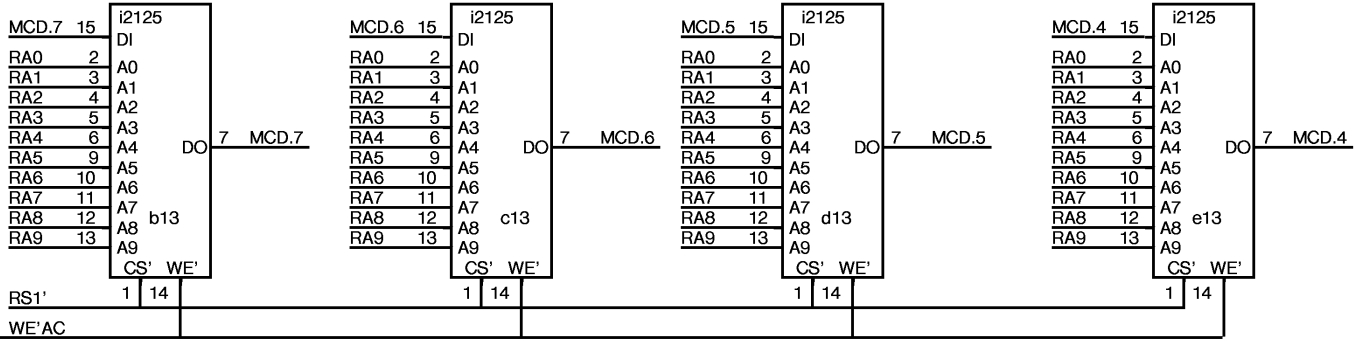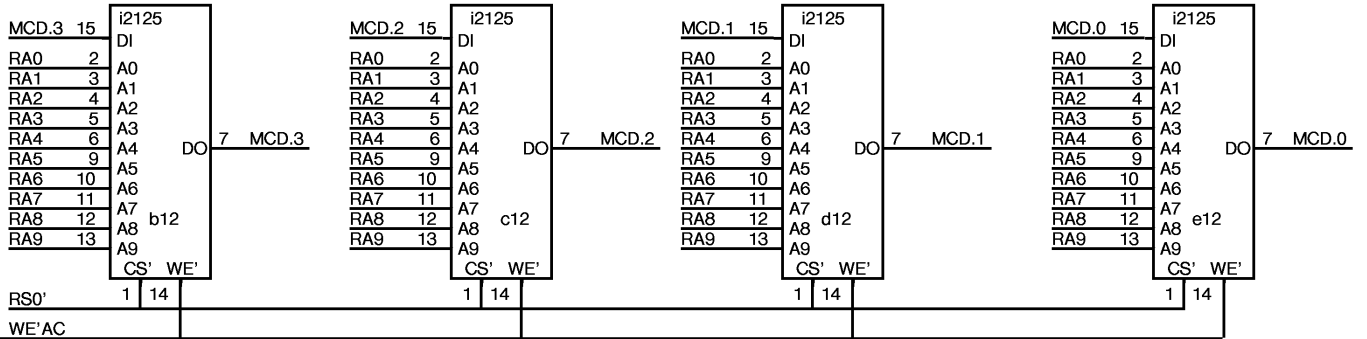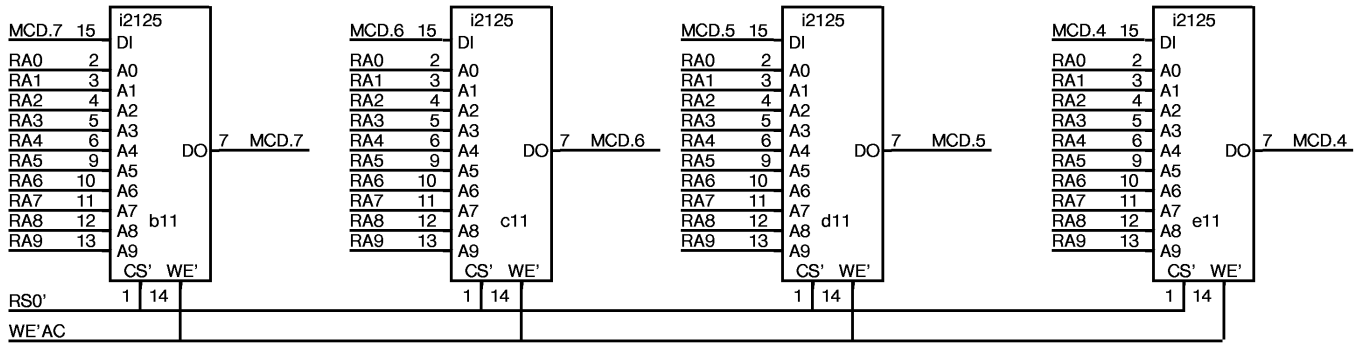

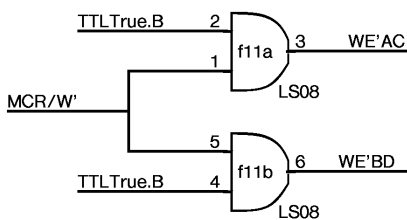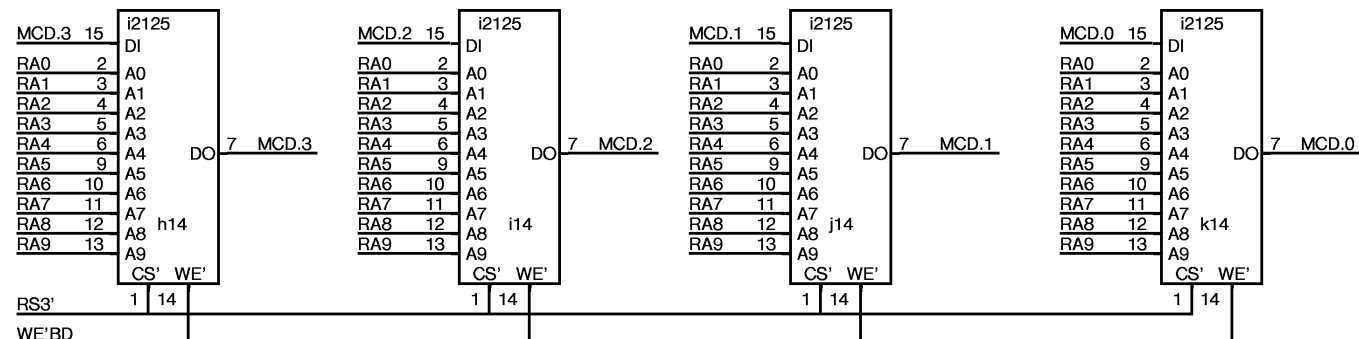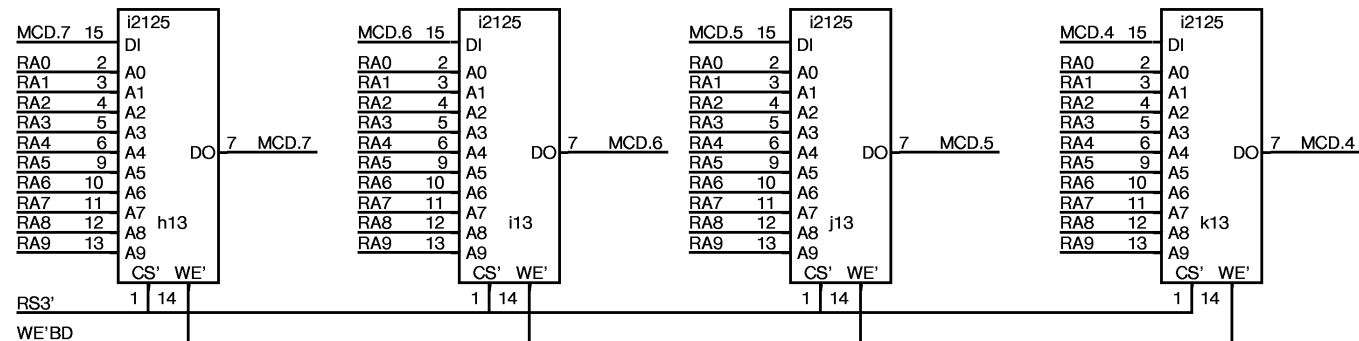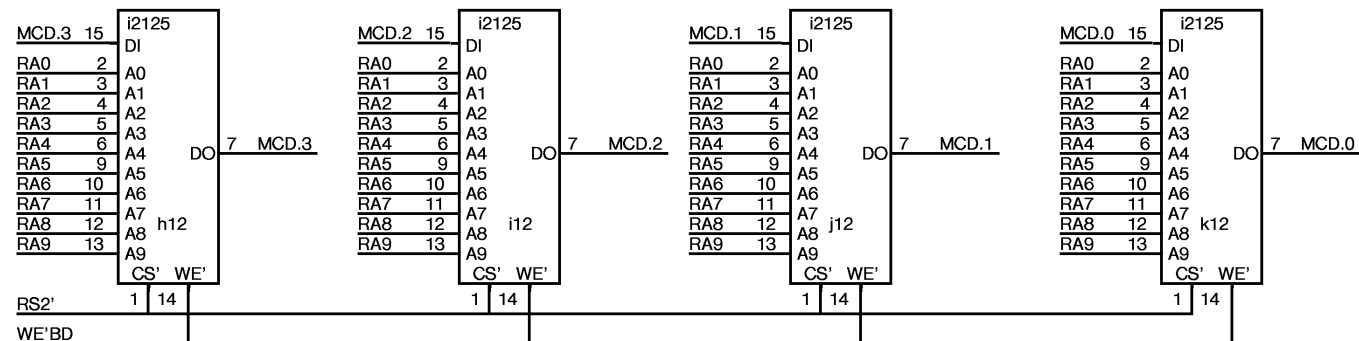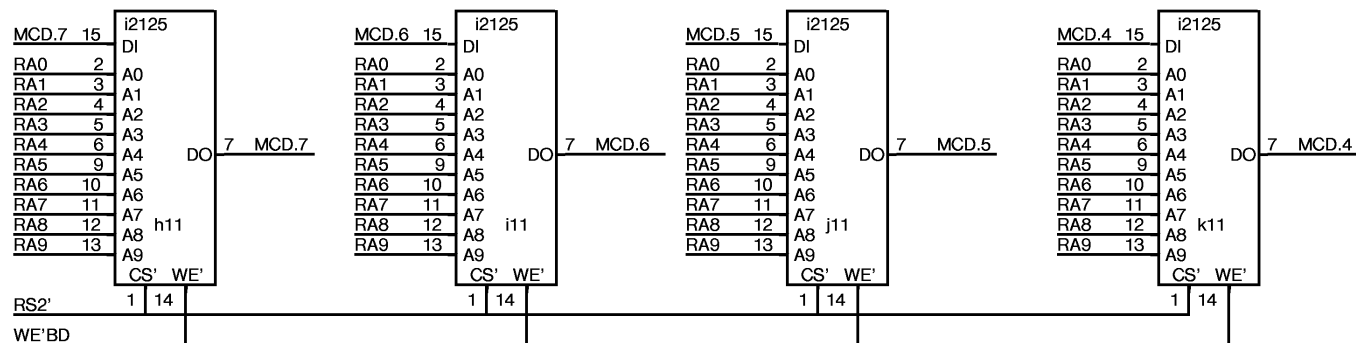


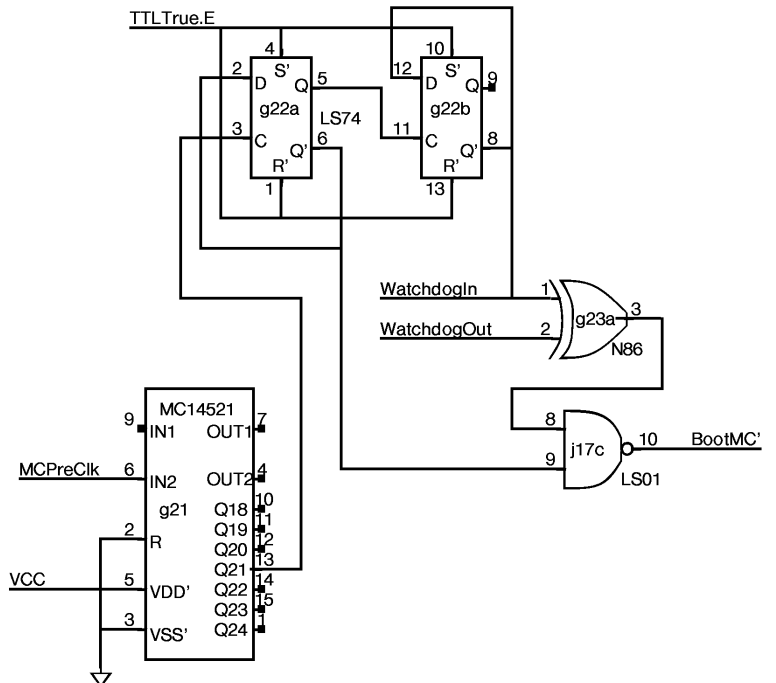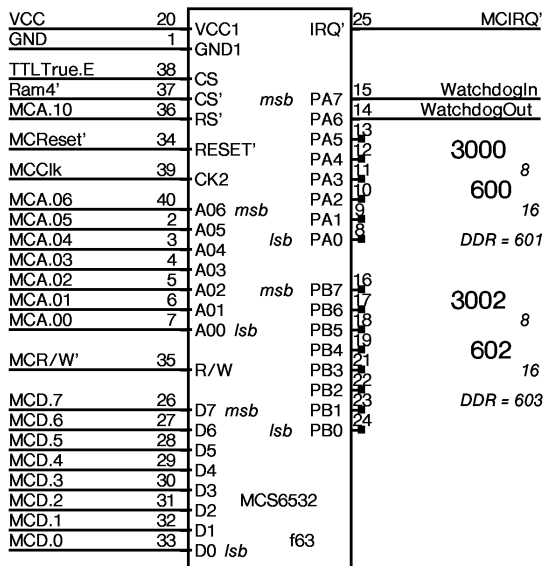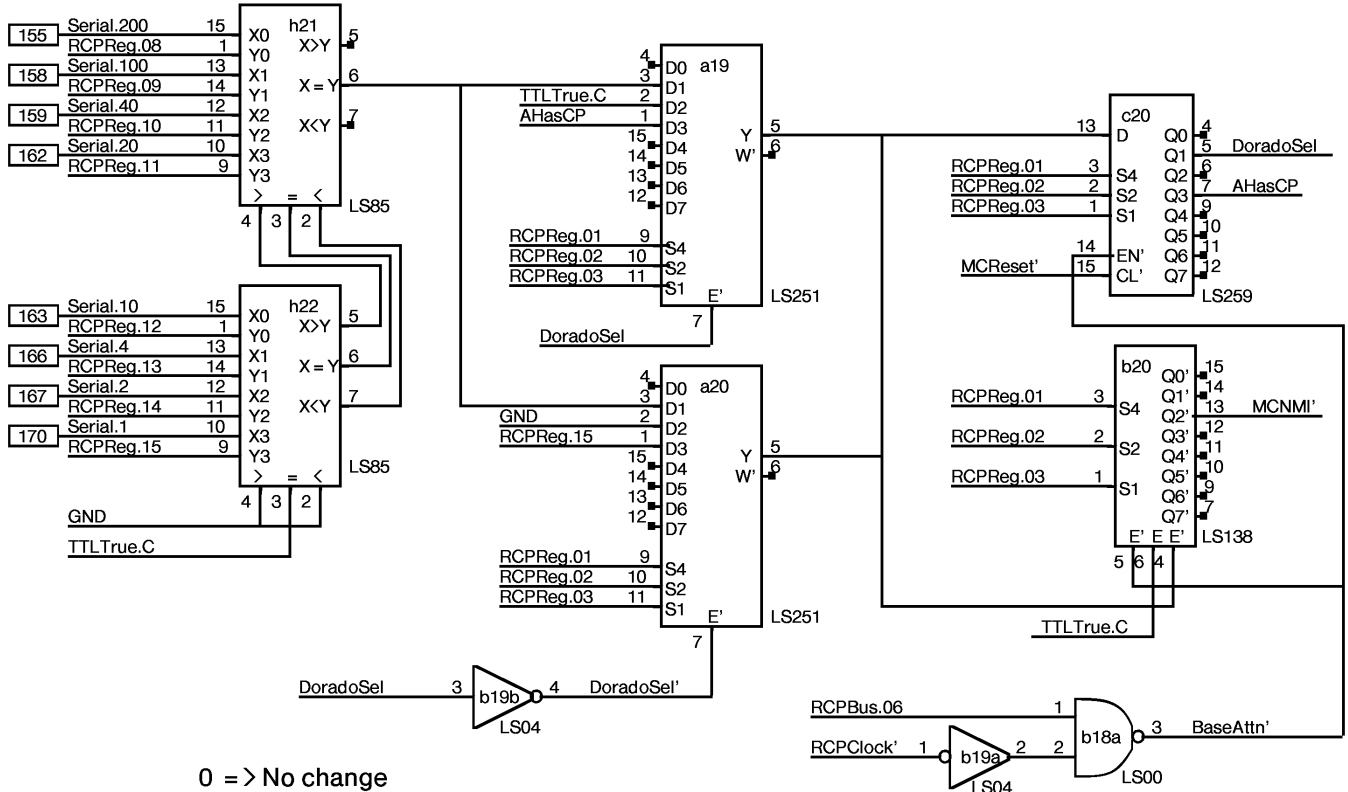


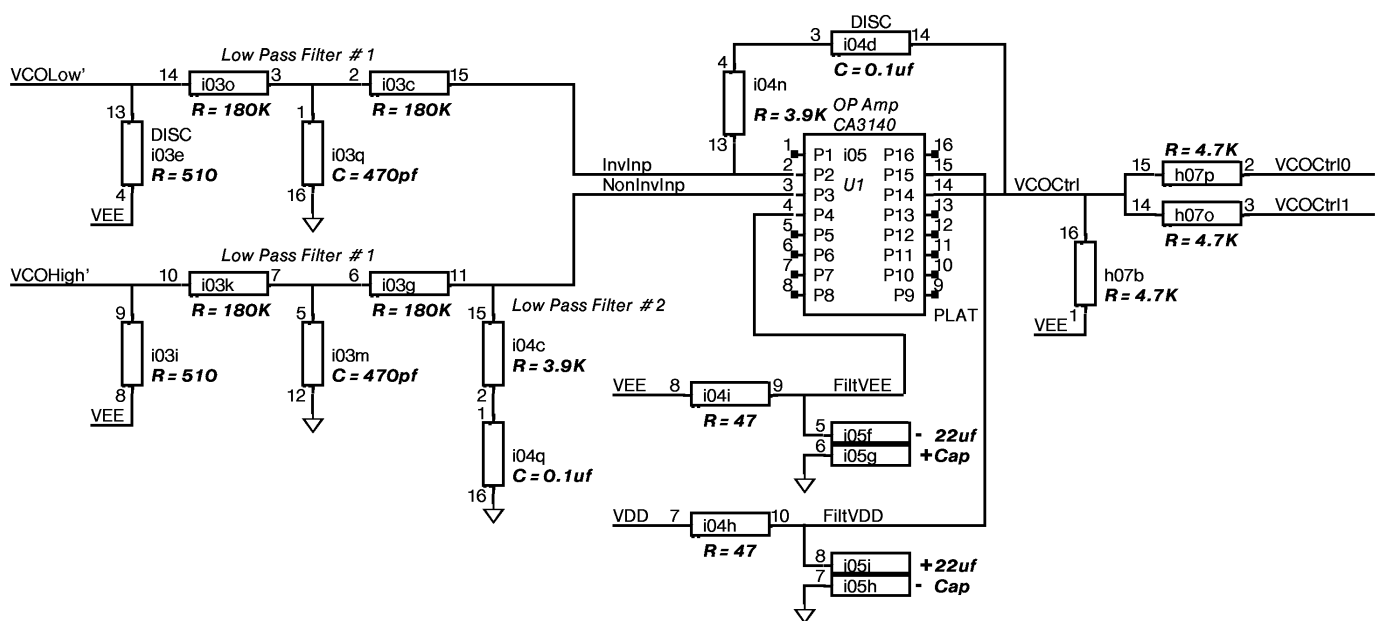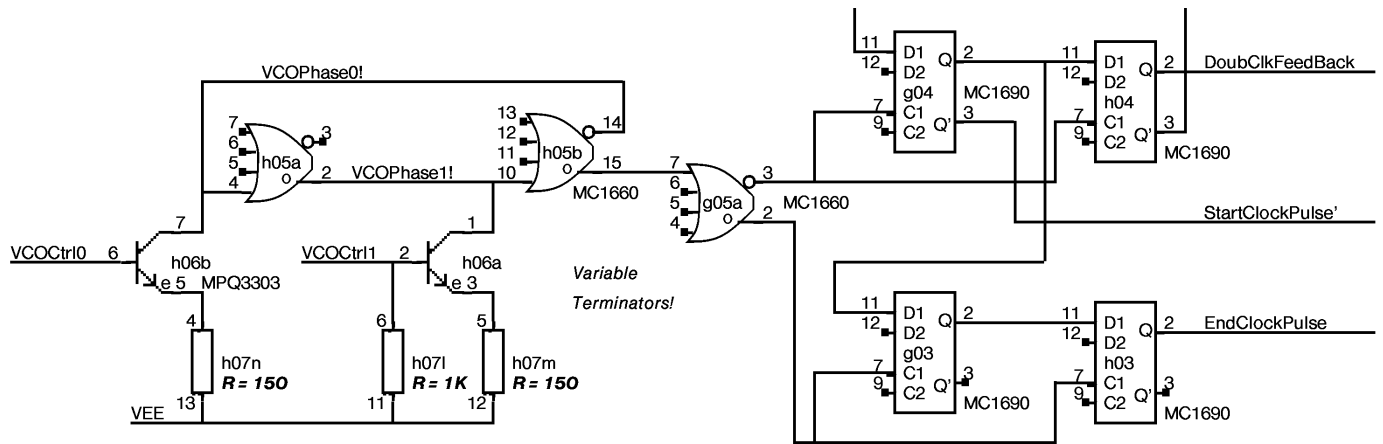



Loop Filter and System VCO

Power On Reset
Power Good at 4.5V

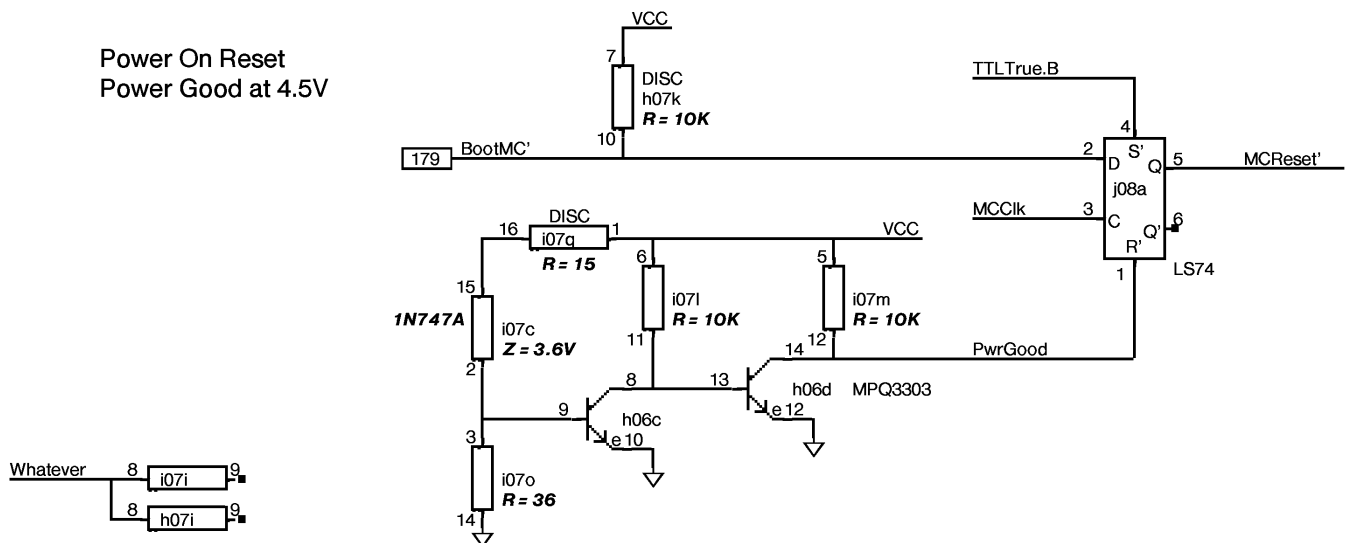




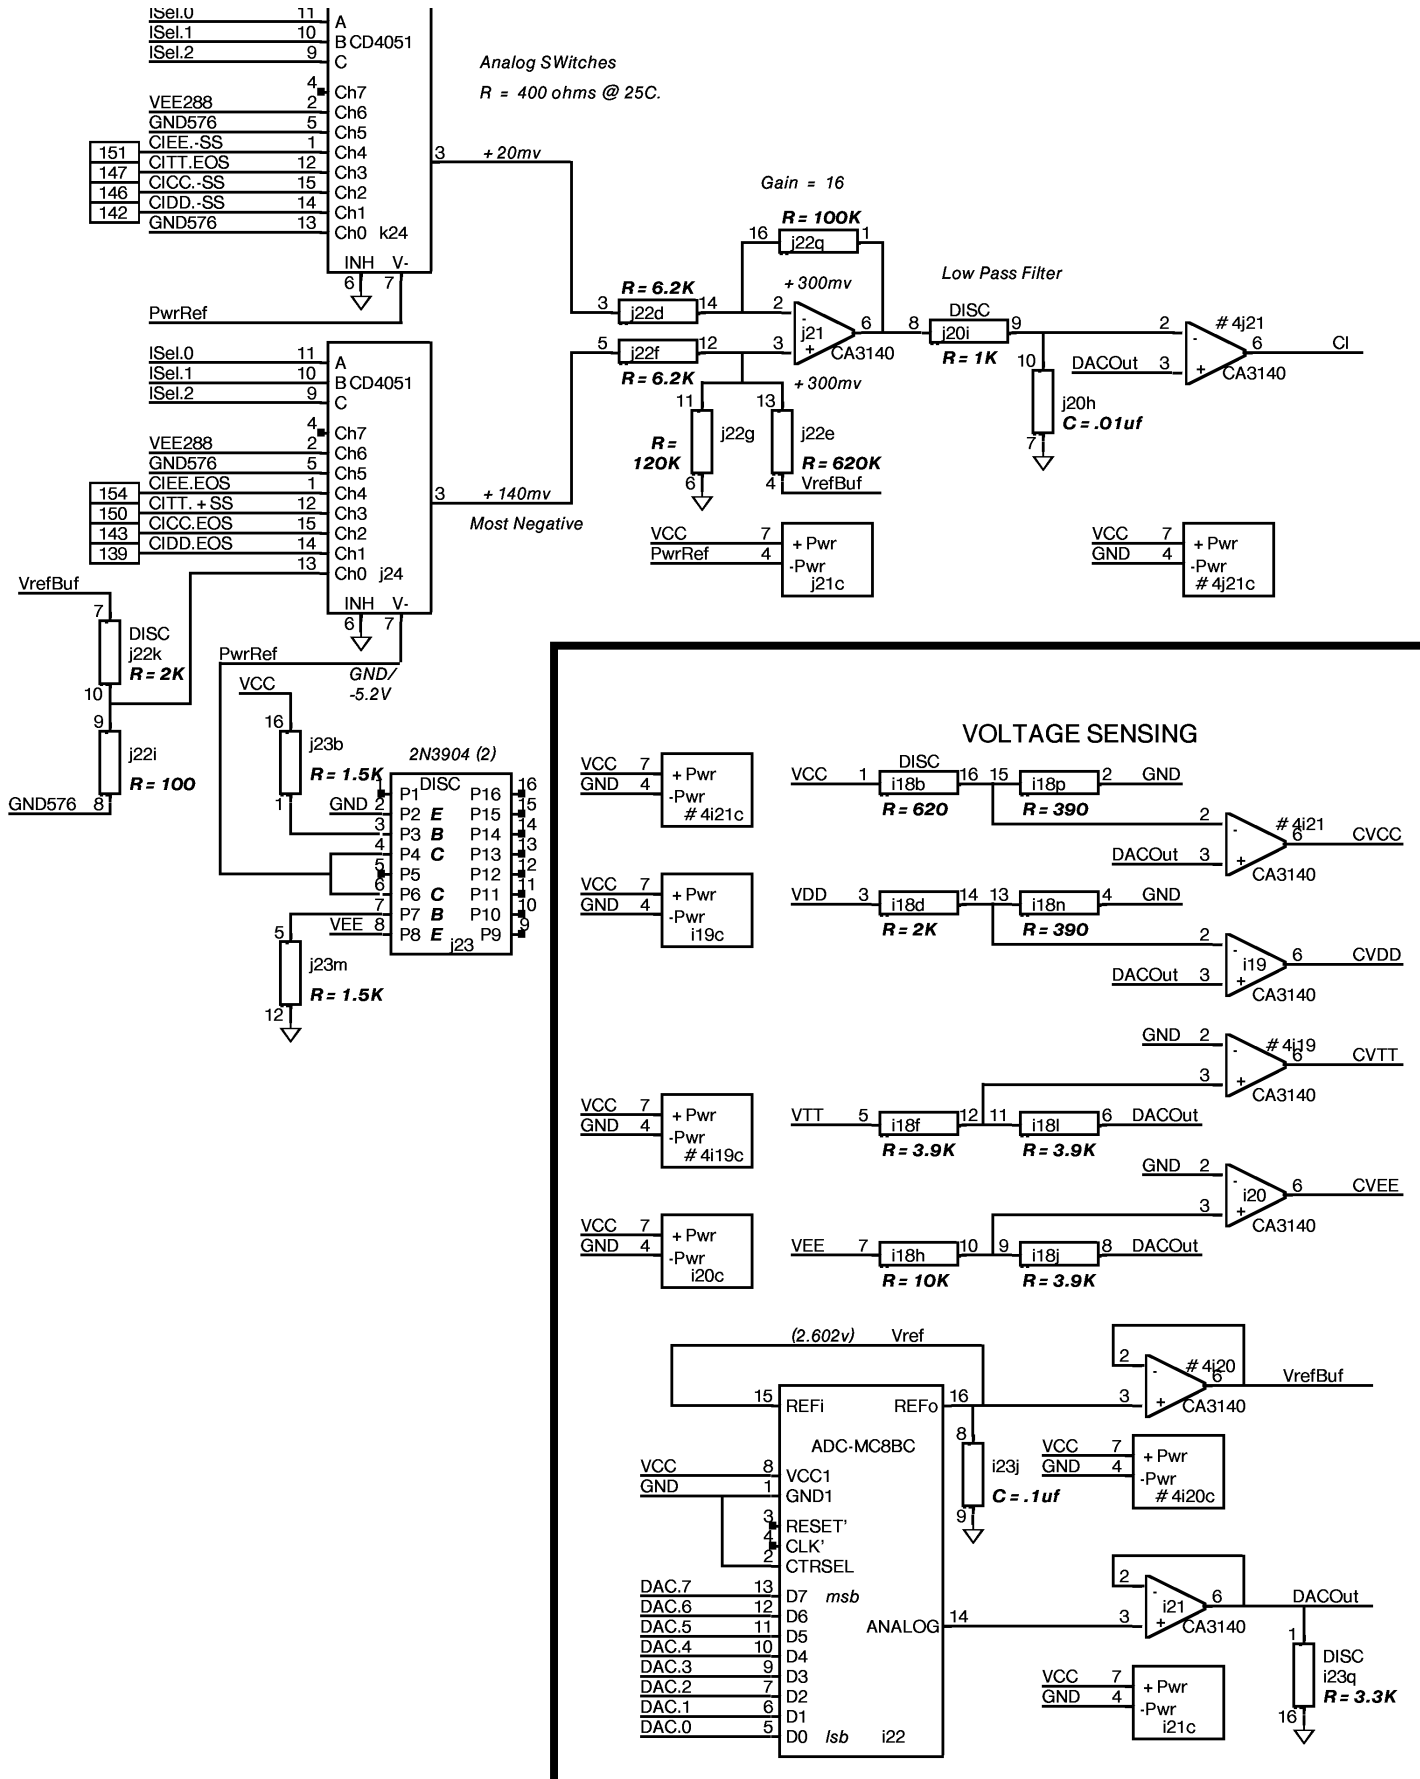


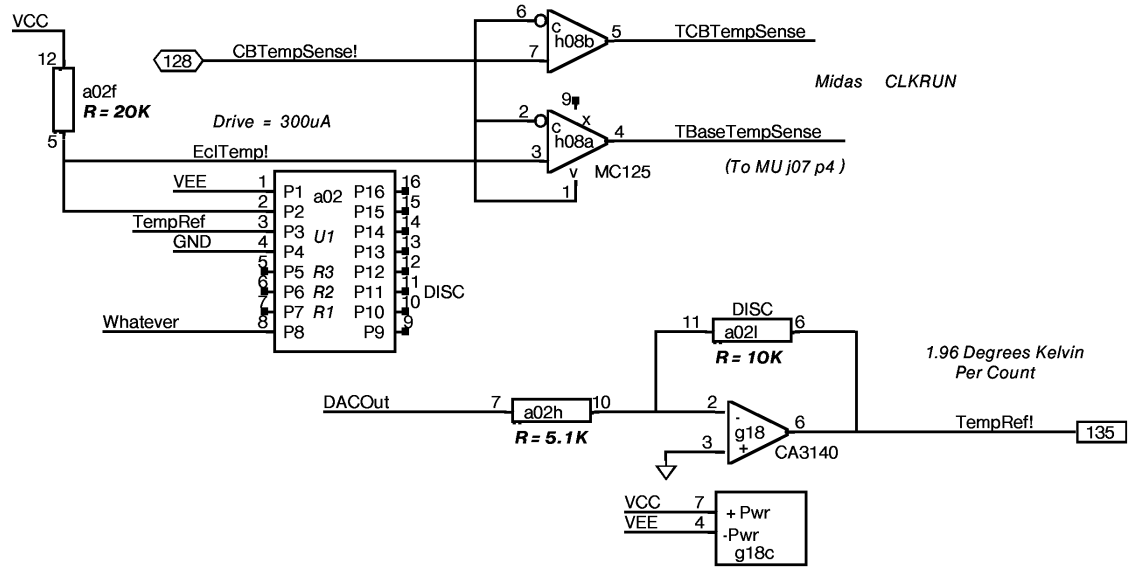





LED FLASH Decoder	
Lite always ON - BOOTED	
1	Normal Wait
2	Unable to Boot Dorado
3	Transient Power Problem
4	Current (NOW) Power Problem
5	Microcomputer Shutdown
6	Over Temperature
7	Microcomputer unable to get control of CP Bus to do its duties
NO LITE - Microcomputer is LOST or all power is OFF.	

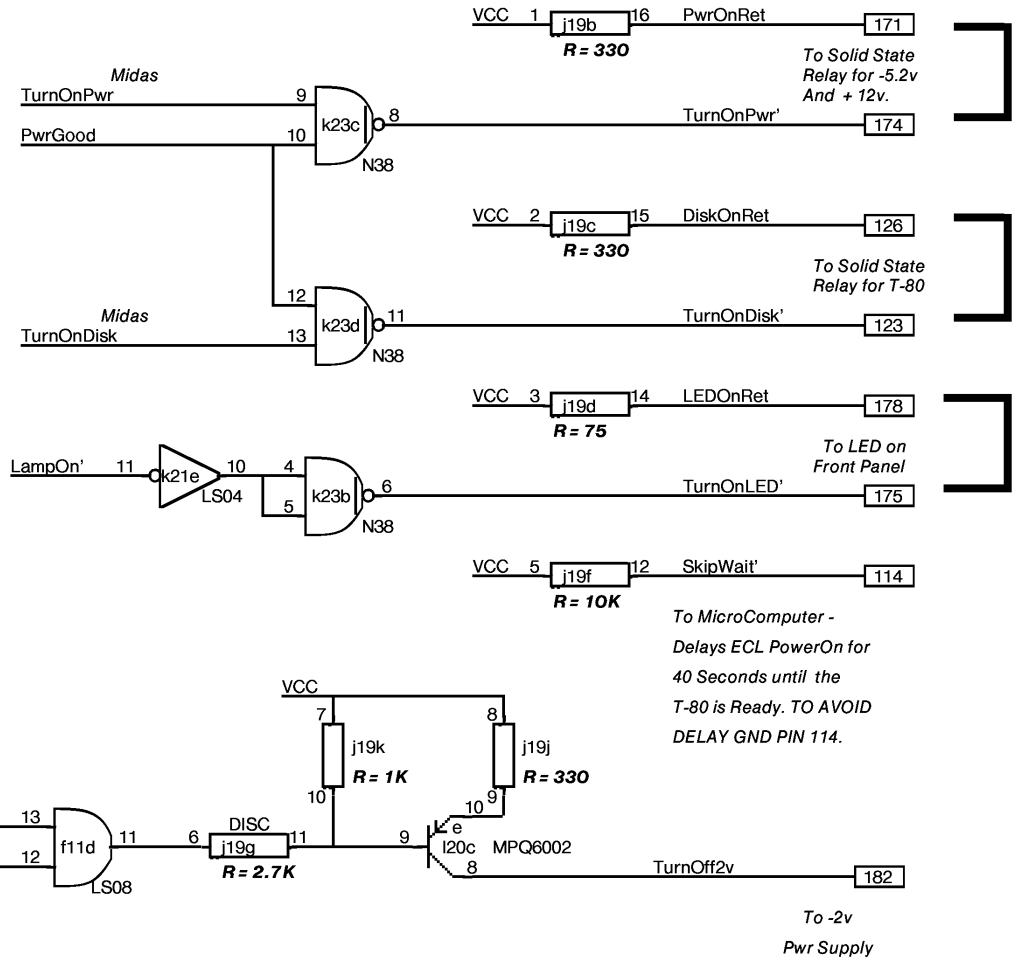


For Future Baseboard Ethernet



expansion EPROMS


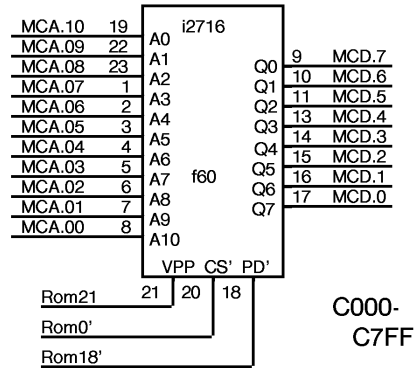
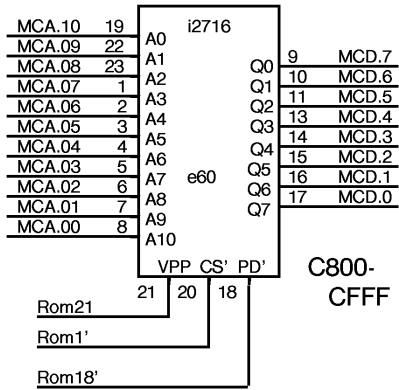
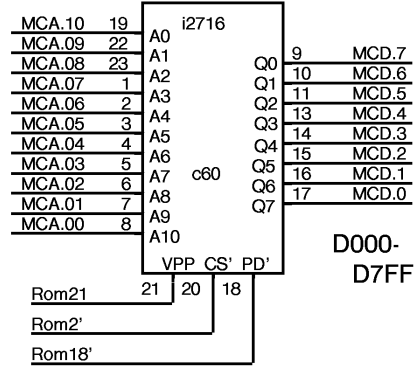
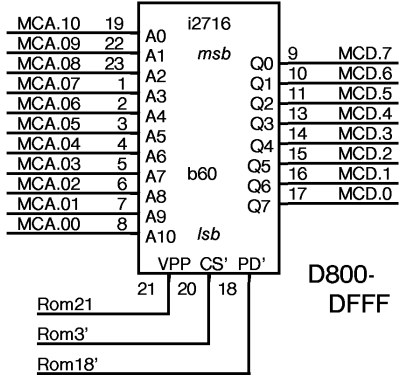


Differential Receivers for 7 wire Interface

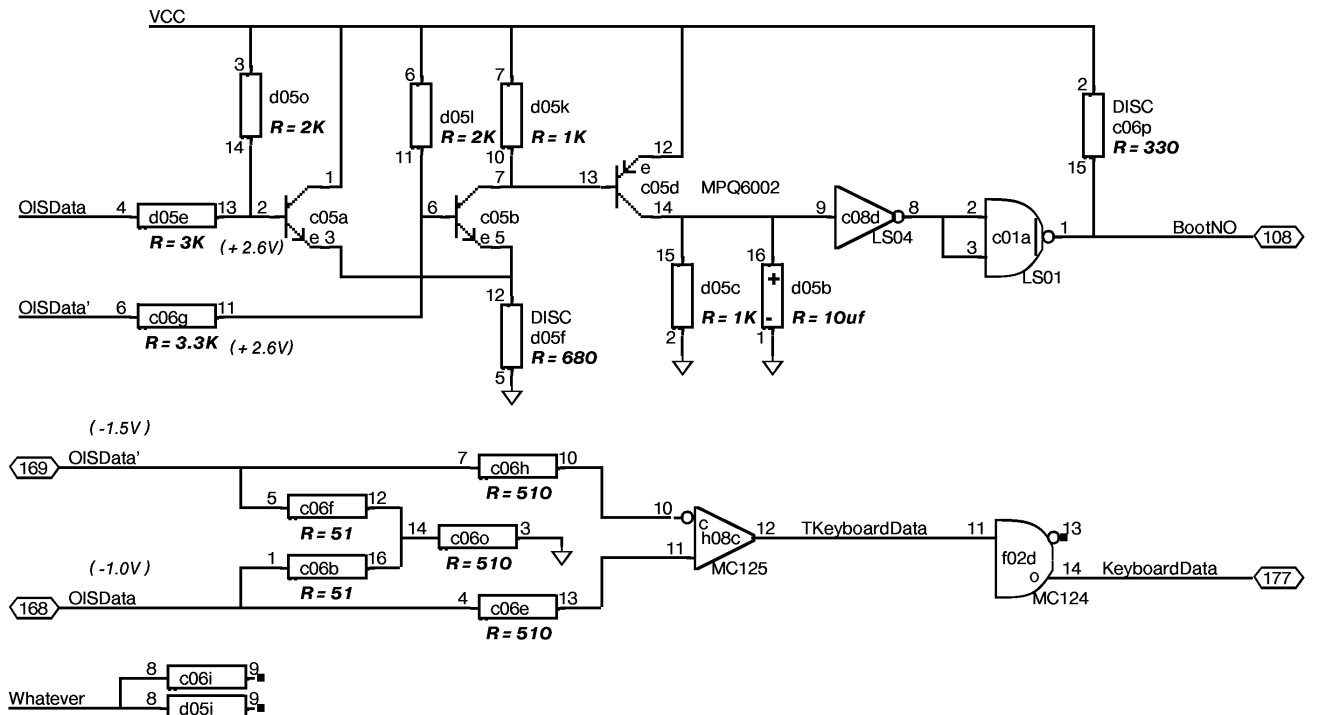

For c05

	a	b	c	d	e	f	g	h	i	j	k	l	
1	RunRfsh Pendulum 176 14	Pendulum RfshPeriod 210 14	BootNO 19,b,c,d LS01 19		CLK.INBase 14,14,14,d 101	CPBus 124 3	CPBus 124 3	CLK.xx 210 14	CLK.xx 210 14	CLK.xx 210 14	CLK.xx 210 14	CLK.xx 210 14	1
2	BaseTemp Sense plat 17	Pendulum 136 14				CPBus 3,3,3,19 124	CPBus 124 3		StClkPulse 14,b SE211	Clk delay 210 14	ClkRate 136 11	ClkRate.0 10 .3 124 11	2
3		b60 D800-DFFF	c60 D000-D7FF		e60 C800-CFFF	f60 C000-C7FF	EndClockPulse 1690 12	Low pass filter 1 1690 12	VCO Contr 12040 11	ClkRate 136 11	ClkRate.4 to .7 124 11		3
4	24 Pins i2716	24 Pins i2716	24 Pins i2716	24 Pins i2716	24 Pins i2716	24 Pins i2716	StartClock Pulse' 1690 12	DoubClk FeedBack 1690 12	Low pass filter 2 12	ECL True a,11,11,d 102		RunRfsh 14,14,c,d 124	4
5			KbData MPQ6002 PLAT 19	KbData discretes PLAT 19			VCO 12,b 1660	Op-amp CA3140 12	Reference 11,b,c,d 124				5
6			KbData discretes PLAT 19	LS157 3	TCP BUS LS157 3	LS157 3	PwrGood' array 12						6
7			EPROMS Jmps Plat 1	SelfStrb 3,b,c,d LS08 3	Max LS163 1	Reserve For Xtal Location 1	TsetRun TSetSS LS175 3	Transistor discretes 12	PwrGood' Discretes 12	MUffler 2210- 2217 LS251 4	manifold 2240- 2257 LS174 4	manifold 2220- 2237 LS174 4	7
8			1,1,1,19,e LS04	uProc Clk 12061 1	Clk Discretes 1	Reserve For Xtal Location 1	MCPReClk 1,11 LS74	TBaseTemp 17,17,19,d 125		MCRReset' 12,b LS74	manifold 2260- 2277 LS174 4	manifold 2200- 2217 LS174 4	8
9	EPROM b61 F800-FFFF	EPROM c61 F000-F7FF		MicroComputer i61 40 pins			EPROM h61 E000-E7FF	EPROM i61 E800-EFFF	MUffler 2230- 2237 LS251 4	manifold 2300- 2317 LS174 4	MUffler 2200- 2207 LS251 4		9
10	24 Pins i2716	24 Pins i2716		6502			24 Pins i2716	24 Pins i2716					10
11		Bit 7	6	5	4	WE'AC,BD 9,9,5,17 LS08	ROM0'-7' LS138 1	Bit 7	6	5	4		11
12		3	2 ^{1st} 2K	1	0	RS0'-3' LS138 8		3	2 ^{2nd} 2K	1	0		12
13		7 i2125	RAMS 6	RAMS 5	4 i2125	RA9-4 LS04 8	RA3-0 8,8,8,5,f LS04	7 i2125	RAMS 6	RAMS 5	4 i2125		13
14		3	2	1	0 8	ExtraRam LS139 2	RAM0'-3' LS138 2	3	2	1	0 9		14
15		500 16	c62		400 16	i62		580 16	i62		480 16	i62	15
16		6532 40 pins	2		6532 40 pins	2		6532 40 pins	2		6532 40 pins	2	16
17									MUffler 2220- 2227 LS251 2	CPDMuxData 5,5,c,d LS01	Midas LS157 5		17
18		BaseAttn' 10,b,c,d LS00					TempRef CA3140 17		CV Discretes 15	Pullups Plat 5	Stuff LS138 4	LS175 5	18
19	DoradoSel' LS251 10	BaseAttn. 10,10,c,d, LS04	TCPI.x 125 6	TDMuxData 6,b,c,d LS32	Pullups PLAT 6	LS174 3	RCPClock' LS138 3	CVDD CVTT CA3140	Discretes TurnOnPwr LED 17		LS138 4	LS157 5	19
20	LS251 10	Dorado Sel LS138 10	DoradoSel LS259 10	TACPI.x LS253 6	TACPI.x LS253 6	CAB LS174 3	MUX LS174 3	CVEE VrefBuf CA3140 15	CI Low Pass PLAT 15		LS85 4	TurnOff2v MPQ6002 17	20
21					600 16	i63	Watchdog Timer 14521 9	Serial # LS85 10	DACOUT CVCC CA3140	CI op-amp CA3140 15	4,4,5,d 14,f LS04	DMD Gen LS174 4	21
22					6532 40 pins	9	Watchdog Timer LS74 9	0-377 LS85 10	DAC 8BC	Discretes 15	MUf MUX 74151 4	LS174 4	22
23		ACPI0 & 1 Discretes 6	ACPI2 & 3 Discretes 6	ACPI4 Discretes 6	RCPBUS04 RCPBUS05 AM2615 5	RCPBUS.1 RCPBUS.0 AM2615 5	Watchdog Timer 7486 9	RCPBUS.2 AM2615 5	Discretes 15	PwrRef 2N3904 PLAT 15	LED,Seq0, Relay Dvr N38 17	5,5,5,d 125	23
24	Schottky Diodes Plat 6	ACPI0 & 1 MPQ6002 Xistor 6	ACPI2 & 3 MPQ6002 Xistor 6	ACPI4 MPQ6002 Xistor 6	RCBUS00 RCPBUS01 AM2615 5	RCPBUS02 RCPBUS03 AM2615 5	RCPBUS06 RCPBUS07 AM2615 5	RCPBUS08 RCPBUS08 AM2615 5	IOReset 4,b,c,d 124	CITT CIEE CD4051 15	CIDD CICC CD4051 15	5,5,5,d 24	24
	a	b	c	d	e	f	g	h	i	j	k	l	
XEROX CSL		Project Dorado	Reference Board Layout			File BaseBd16.sil		Designer McCreight		Rev Am	Date 4/29/81	Page 16	

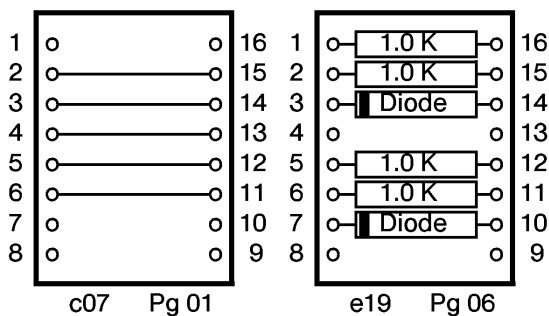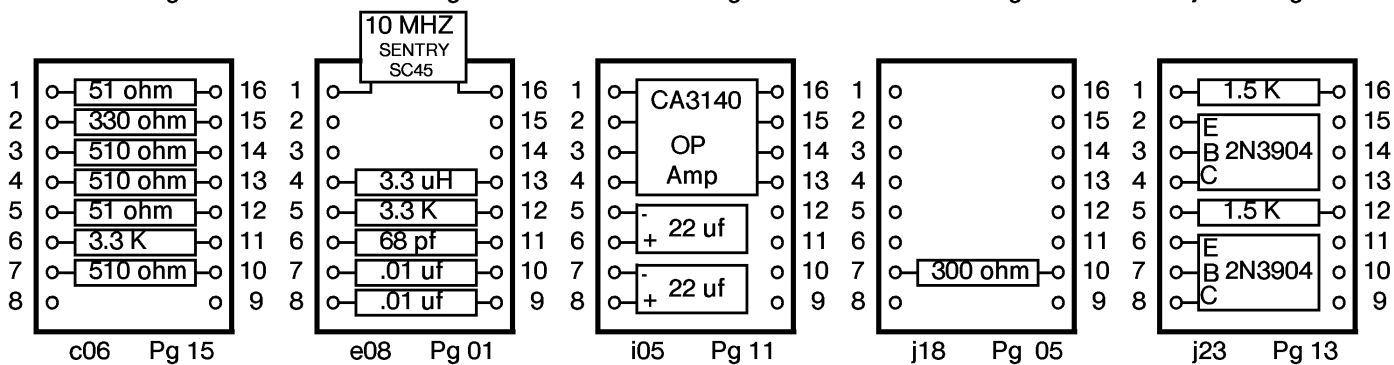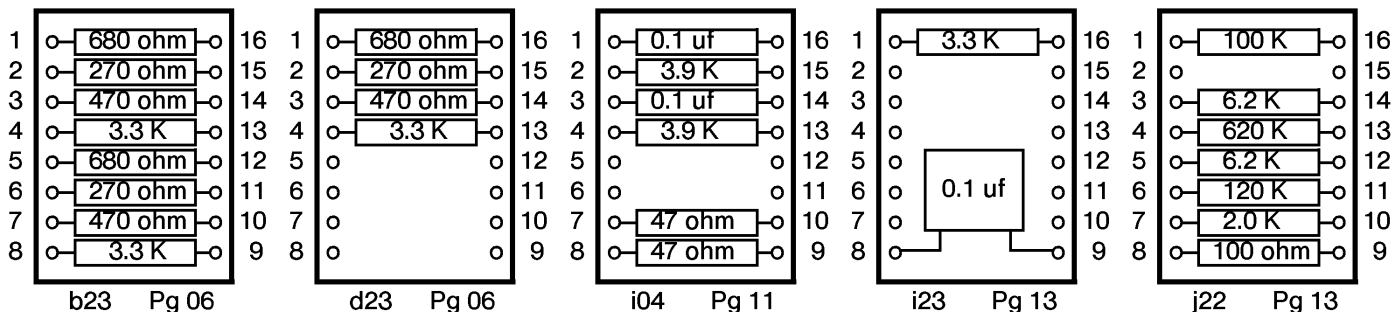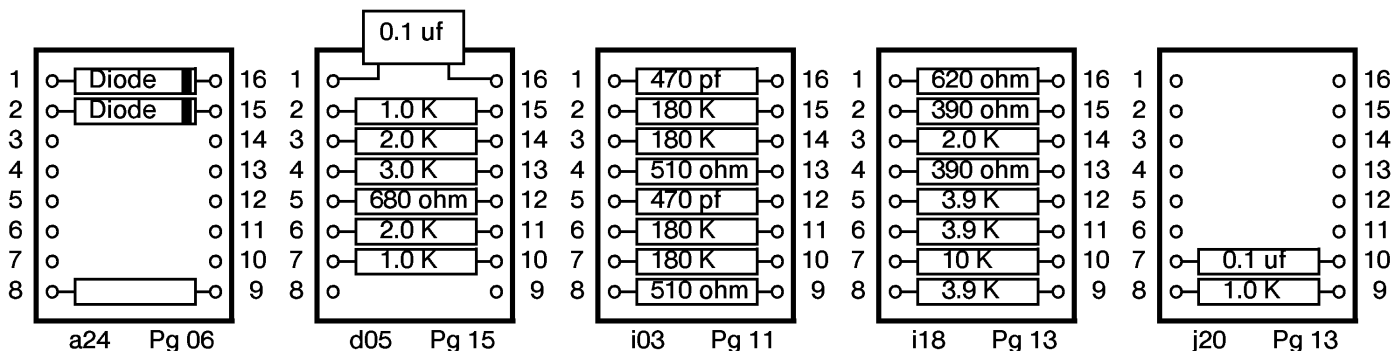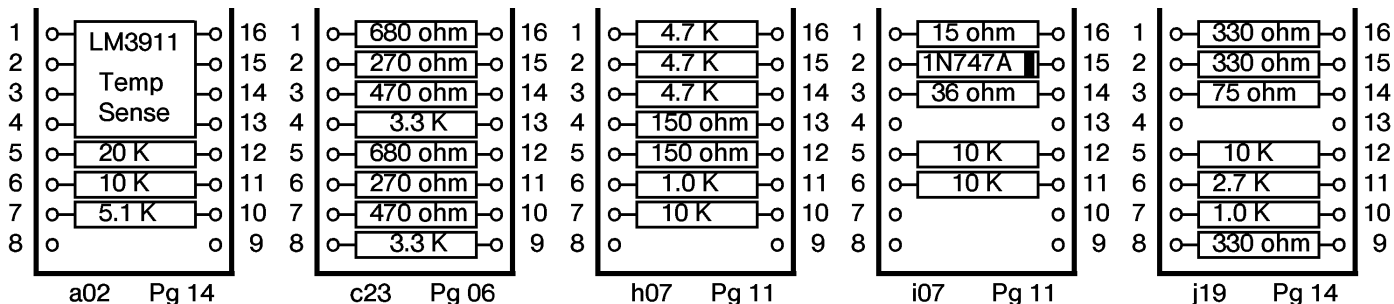

NOTES:

All diodes are HP 5082-2835 unless otherwise noted

Locations b60, c60, e60, f60, b61, c61, h61, and i61 a
are EPROMS and must be programmed

Location k22 can use a 74151 instead of a 741S151

Location l49 must be loaded with a SIP having pins 2,4,5,&7 cut.