

Printer Dover

Spruce version 11.2 -- spooler version 11.2

File: MWBoardLayout.sil

Creation date: 16-Jul-82 13:42:01

For: Spruce

2 total sheets = 1 page, 1 copy.

Problems encountered:

Font HELVETICA24B substituted for font HELVE24.

Not impl.: brightness, hue, saturation, show-object, show-dots-opaque, dots from files

Not impl.: brightness, hue, saturation, show-object, show-dots-opaque, dots from files



Not impl.: brightness, hue, saturation, show-object, show-dots-opaque, dots from files

Not impl.: brightness, hue, saturation, show-object, show-dots-opaque, dots from files

Not impl.: brightness, hue, saturation, show-object, show-dots-opaque, dots from files

Not impl.: brightness, hue, saturation, show-object, show-dots-opaque, dots from files

Not impl.: brightness, hue, saturation, show-object, show-dots-opaque, dots from files

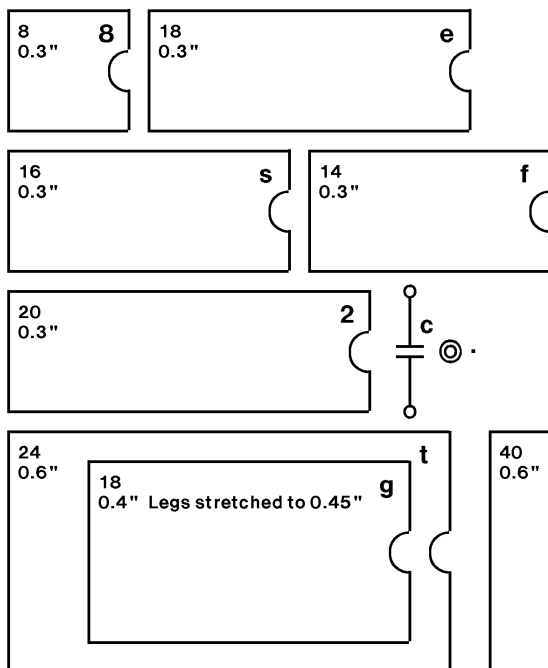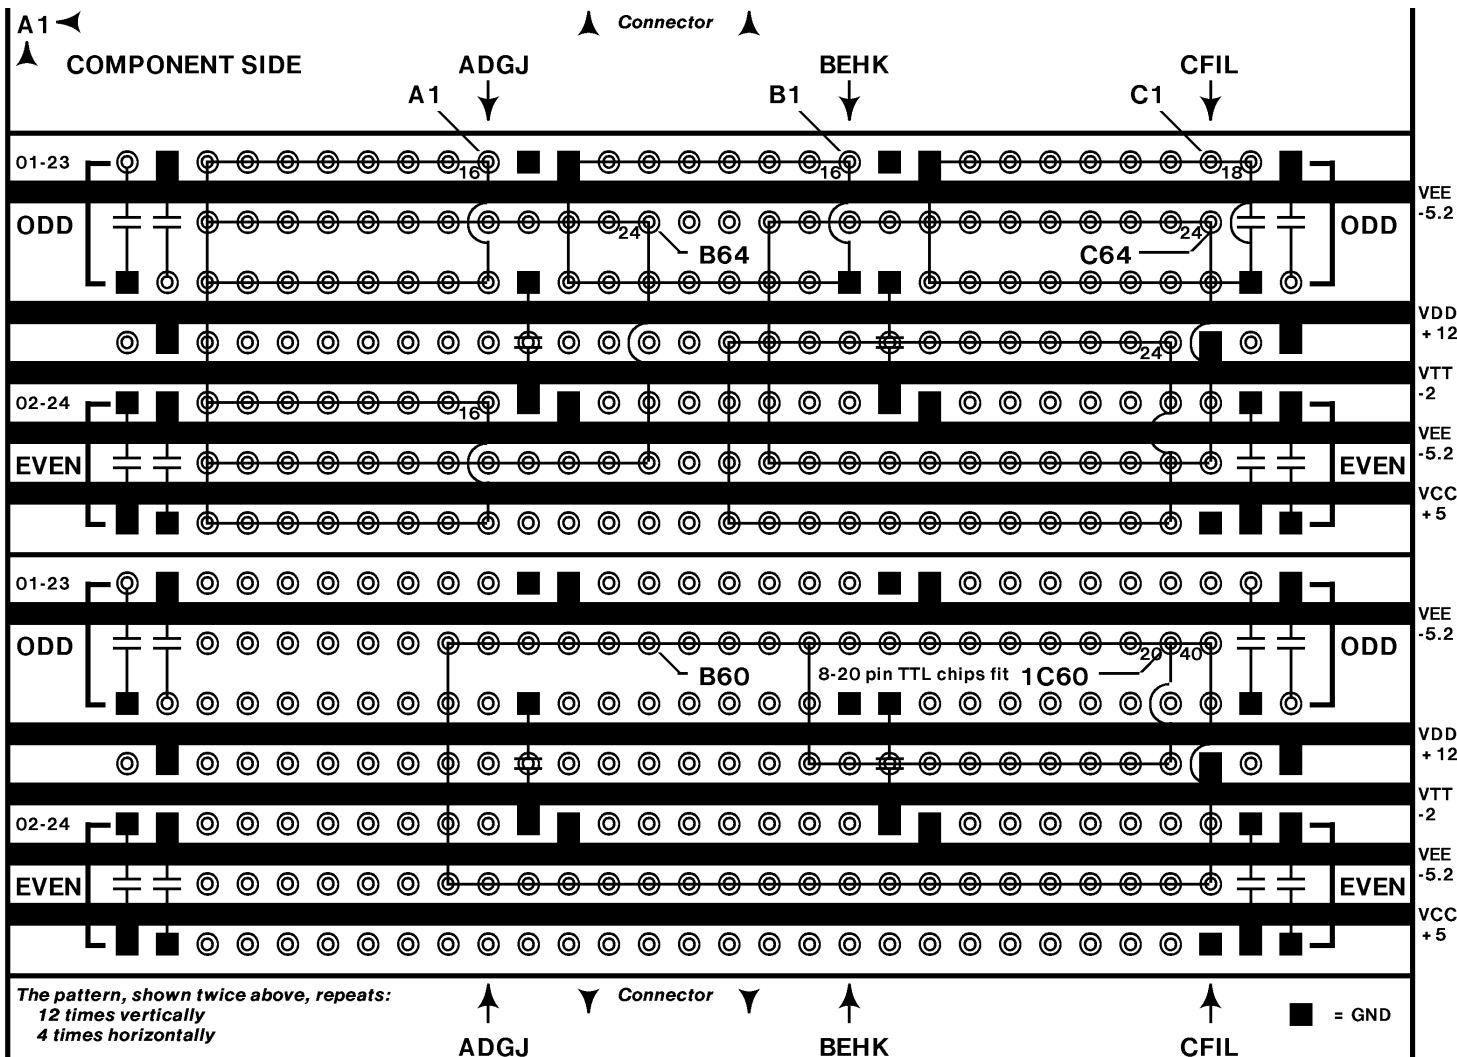

Notes:

- The row numbers of the uncommitted rows, usable for TTL, etc. are:
- Originally, the uncommitted rows were numbered for 24-pin chips. This is why pin 1 of the 24-pin chip in the B row is at B64, not 5B64!
- 0.4" wide chips can be inserted by bending the legs out to 0.45"!
- The syntax for specifying the board location of pin 1 of a chip is:
{← {-} R-offset } { {↑ }{-} D-offset } BoardLocation Modifier

where R-offset is the number of positions DOWN in the picture above
D-offset is the number of positions LEFT in the picture above
{ and } are metasyms denoting optional omission.
and Modifier may be ! or %, etc.

Example: #←3↑1c1 is the location of the 24-pin 0.4" dip in the picture above.

Example: #←1↑-5B64 is the same as B1

(← and ↑ actually specify offsets Right and Down *relative to the chip* held vertically)

Top
64
60
65
66
61
67
68
62
69
70
63
71
Bottom