


CAC Sabre

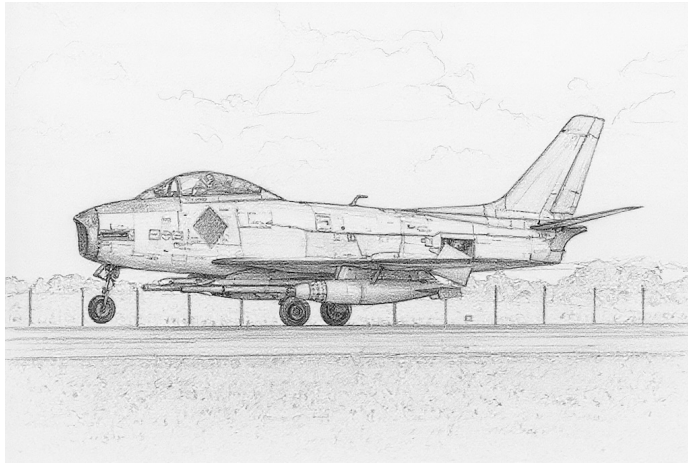

The Commonwealth Aircraft Corporation (CAC) Sabre is a day fighter and fighter-bomber derived from the North American F-86F Sabre with a lighter and more powerful Rolls-Royce Avon 20 engine replacing the General Electric J47 and two 30 mm ADEN cannons replacing the six .50 cal machine guns. Because of its engine, it is also known informally as the Avon Sabre.¹

Versions

CAC Sabre Mk.30

The first version was the Mk.30. It had the early slatted wing from the A, E, and early F versions of the F-86.²

It served in the RAAF starting in 1954, replacing the Meteor F.8.

CAC Sabre Mk.31

The Mk.31 used the unsalted 6-3 wing from later F versions of the F-86, which gave better performance at higher speeds and altitudes, but was otherwise similar to the Mk.30. The Mk.31 was upgraded in 1960 with two additional weapon stations to allow it to carry missiles or bombs and fuel tanks simultaneously, like the Mk.32.³

The Mk.31 served in the RAAF from 1955 to 1971, when they were replaced by the Mirage III. All surviving Mk.30 aircraft were upgraded to the Mk.31 standard. The Mk.31 later served in the Malaysian and Indonesian air forces.

CAC Sabre Mk.32

The Mk.32 is a development of the Mk.31 with an Avon 26 engine, modifications to prevent surges when the guns were fired, and two additional weapon stations that allowed it to carry air-to-ground weapons and fuel tanks simultaneously, giving it a longer range when employed as a fighter-bomber. The Mk.32 competes with the Canadair

Sabre 6 for the honor of being the very best day-fighter Sabre.⁴

The Mk.32 served in the RAAF from 1956 to 1971, when they were replaced by the Mirage III, and later in the Malaysian and Indonesian air forces.

Service

CAC Sabres served with the RAAF in the Malayan emergency, the Malaysian-Indonesian confrontation, and the Vietnam War in Thailand.

Armament and Stores

The CAC Sabres were armed with two 30 mm ADEN cannons each with 162 rounds.⁵

For additional endurance, all versions can carry 167 gallon (760L) fuel tanks on the outer station, and those with inner station can also carry 100 gallon (450L) on these.⁶

A typical air-to-air load would be two 167 gallon (760L) fuel tanks on the outer stations and, from 1960, two AIM-9Bs on the inner stations.

A typical air-to-ground load might be two 1000 lb bombs on the inner stations along with two 167 gallon tanks on the outer stations. Alternatively, the Mk.32 could carry twenty-four Hispano Sura 80R rockets, with three carried one below the other on each of the eight rocket stations, but at the price of not being able to use external fuel tanks.⁷

For ferry flights, in theory two 100 gallon (450L) fuel tanks could be carried on the inner stations and two 167 gallon (760L) fuel tanks to the outer ones. However, this did not actually improve the range as the increase drag more than compensated for the increase in fuel capacity.⁸

In 1960, the RAAF adopted the AIM-9B IRM for both the Mk.31 and Mk.32.

ADCs

- CAC Sabre Mk.30
- CAC Sabre Mk.31
- CAC Sabre Mk.31 (1960 Upgrade)
- CAC Sabre Mk.32

See Also

- Canadair Sabre
- North American F-86 Sabre

Notes

1. Sources.

- Curtis, “North American F-86 Sabre”, 2000, Crowood.
- Farquhar, “A Brief History of the CAC Avon Sabre” (Wayback). Development and RAAF service.
- Webster, “The F-86 Sabre Family Tree”, APJ 25. This has ADCs for the Mk.31 and Mk.32.
- Wikipedia on the ADEN cannon.
- Wikipedia on the CAC Sabre.

2. Mk.30. The ADC for the Mk.30 is derived from that for the Mk.31.

Wing. Essentially, the Mk.30 is a Mk.31 with the earlier slatted wing (Curtis, Wikipedia). The Mk.31 has the unslatted 6-3 wing. This situation is similar to the F-86F, which also had versions with the early slatted and unslatted 6-3 wings. The minimum speeds and turn drags of the Mk.31 match those of the F-86F-25 with the unslatted 6-3 wing. Therefore, I have created an ADC for the Mk.30 by modifying that of the Mk.31 with the minimum speeds and turn drag of the F-86F-25 with the slatted wing. As the F-86A/E/F with the early slatted wing are HTD, I have made the Mk.30 HTD too.

3. Mk.31. The ADC for the Mk.31 is adapted from Webster’s in APJ 25.

4. Mk.32. The ADC for the Mk.32 is adapted from Webster’s in APJ 25.

Fuel. Curtis states that the “wet wing” Mk.32s had an internal fuel capacity of 422 gallons (1899L) and with an additional 60 gallons (270L) in the wing leading edges. The additional fuel corresponds to about 23 fuel points.

5. Guns. Two 30 mm ADEN guns with 162 rounds per gun (Wikipedia). At 1200 rounds per minute, this is 4.0 shots.

6. FTs. Curtis (p. 114) states that the Mk.32 could carry 100 gallon (450L) and 167 gallon (760L) FTs (perhaps on the inner pylons). Farquhar states that the Mk.32 could carry 100 gallon FTs on the inner pylons and 167 gallon FTs on the outer ones. Wikipedia states they could carry 200 gallon (900L) FTs on the outer pylons, but this seems to be a confusion between US and Imperial gallons, since 167 Imperial gallons are about 200 US gallons. I am assuming the capacity of the outer station tanks is unchanged in these different versions.

7. Load Limits. Webster gives weight limits of 1000 lb for both the inner and outer stations. However, Farquhar states that the Mk.32 could carry a 200 US gallon (167 gallon) fuel tanks on the outer pylons, and these weigh about 1400 lb. Curtis also states that the Mk.32 could carry these tanks, but does not specify on which station.

The early F-86s (A/E/F-1/F-10/F-15/F-20) have load limits of 1400 lb on their outer stations; the later F-86s have the same load limits on their outer stations and 1000 lb limits on the inner stations. I have adopted these limits.

Wikipedia gives the load limits of the F-86F and Mk.32 as 5300 lb and states they can both carry two 1000 lb bombs and two 200 US gallon FTs, which would be a total of about 4800 lb. I have increased the total loads to 3000 lb for the Mk.30/31 and 5000 lb for the Mk.32.

Rockets. Webster gives the Mk.32 eight wing stations for up to three rockets each, usable in place of the normal four wing stations. Wikipedia states that twenty-four Hispano SURA 80 mm rockets could be carried. Up to four of these rockets can be stacked, one below each other, on a suitable weapon station, but it would seem that only three were mounted here. Farquhar states that eight or twenty-four HVARs could be carried. I’ve never seen HVARs stacked three per rail, so I suspect he is confusing HVARs with SURAs.

8. Four Fuel Tanks. Farquhar comments on lack of improvement in range from adding two 100 gallon tanks in addition to two 167 tanks. In game terms, the aircraft is 1/2 with two tanks but DT with four tanks.

Photo Credit

- CAC Sabre: Bidgee (CC BY-SA 3.0)

CAC Sabre Mk.30										Crew: Pilot									
										Maneuver HFPs/DPs:									
LR/DR		1.0		1.0															
VR				0.0															
Power APs/DPs/FPs: ○										Turn DPs:									
CL		1/2		DT		Fuel		CL		1/2		DT							
AB		—		—		—		TT		0.0/0.0		1.0/1.0							
M		1.5		1.5		1.0		HT		1.0/1.0		1.0/1.0							
N		0.0		0.0		0.5		BT		1.0/2.0		2.0/3.0							
I		0.5		0.5		0.0		ET		—		—							
SPBR		0.5		0.5		—													
					Cruise Speed: 5.5 Restr. Arcs: —														
					Climb Speed: 3.5 Blind Arcs: 30–														
					Visibility: 5 Internal Fuel: 160														
					Size: +0 AtA Refuel: No														
					Vulnerability: +0 Ejection Seat: Std					Automatic leading-edge slats. If speed ≤ 3.5, use higher drag.									
Speeds and Ceilings										Climb Capabilities									
Alt. Band		Conf. Ceil.		CL 52		1/2 48		DT 42		Dive Speed		CL AB Oth		1/2 AB Oth		DT AB Oth		Alt. Band	
EH+		46+		3.0 – 6.0		3.0 – 5.0		—		6.5		— 0.5		— 0.5		— —		EH+	
VH		36–45		3.0 – 6.0		3.0 – 5.0		3.0 – 5.0		6.5		— 1.0		— 1.0		— 0.5		VH	
HI		26–35		2.5 – 6.0		3.0 – 5.5		3.0 – 5.0		7.0		— 1.5		— 1.0		— 0.5		HI	
MH		17–25		2.0 – 6.5		2.5 – 5.5		2.5 – 5.5		7.0		— 1.5		— 1.5		— 1.0		MH	
ML		8–16		1.5 – 6.5		2.0 – 6.0		2.5 – 5.5		7.5		— 2.0		— 1.5		— 1.0		ML	
LO		0–7		1.5 – 7.0		1.5 – 6.5		2.0 – 6.0		7.5		— 2.0		— 2.0		— 1.5		LO	

Radar:			APG-56			ECM:			IFF			Weapon Stations Diagram:																				
ECCM:			0			RWR:			—																							
Arcs:			Limited			DDS:			—																							
Search:			—			DJM:			—																							
Track:			12–6			AJM:			—																							
Lock-On:			6			BJM:			—																							
Guns:			Two 30 mm Aden						Technology:						Load Point Limits:						CL : 0–2											
To Hit:			6/3/2						None												1/2: 3–6											
Ammunition:			4.0												Weight Limit:						3,000						DT : 7+					
Gunsight:			TT+0/HT+1/BT+2												Station		Limit		Allowed Loads													
Ranging:			RE												1 and 2		1,400		BB FT													
AtA/AtG:			6/6												Load Notes:																	
Bomb System:			Manual												1. May use 167 gal (760L) FTs.																	
Notes:																																
1. The Commonwealth Aircraft Corporation (CAC) Sabre Mk.30 is a day fighter and fighter-bomber. It is also known as the Avon Sabre. The Mk.30 is derived from the North American F-86F Sabre, has the early slatted wing, and uses the more powerful and lighter Rolls-Royce Avon 20 engine instead of the General Electric J47.																																
2. High transonic drag (HTD).																																

CAC Sabre Mk.31										Crew: Pilot																			
										Maneuver HFPs/DPs:																			
LR/DR		1.0		1.0																									
VR				0.0																									
Power APs/DPs/FPs: ○										Turn DPs:																			
CL		1/2		DT		Fuel		CL		1/2		DT																	
AB		—		—		—		TT		0.0		1.0																	
M		1.5		1.5		1.0		HT		1.0		1.0																	
N		0.0		0.0		0.0		BT		2.0		3.0																	
I		0.5		0.5		1.0		ET		—		—																	
SPBR		0.5		0.5		1.0																							
					Cruise Speed: 5.5 Restr. Arcs: —																								
					Climb Speed: 3.5 Blind Arcs: 30–																								
					Visibility: 5 Internal Fuel: 160																								
					Size: +0 AtA Refuel: No																								
					Vulnerability: +0 Ejection Seat: Std																								
Speeds and Ceilings										Climb Capabilities																			
Alt. Band		Conf. Ceil.		CL 52		1/2 48		DT 42		Dive Speed		CL AB Oth		1/2 AB Oth		DT AB Oth		Alt. Band											
EH+		46+		2.5 – 6.0		3.0 – 5.0		—		6.5		— 0.5		— 0.5		— —		EH+											
VH		36–45		2.5 – 6.0		2.5 – 5.0		3.0 – 5.0		6.5		— 1.0		— 1.0		— 0.5		VH											
HI		26–35		2.0 – 6.0		2.5 – 5.5		2.5 – 5.0		7.0		— 1.5		— 1.0		— 0.5		HI											
MH		17–25		2.0 – 6.5		2.5 – 5.5		2.5 – 5.5		7.0		— 1.5		— 1.5		— 1.0		MH											
ML		8–16		2.0 – 6.5		2.0 – 6.0		2.5 – 5.5		7.5		— 2.0		— 1.5		— 1.0		ML											
LO		0–7		1.5 – 7.0		1.5 – 6.5		2.0 – 6.0		7.5		— 2.0		— 2.0		— 1.5		LO											
Radar:					APG-56					ECM:					IFF					Weapon Stations Diagram:									
ECCM:					0					RWR:					—														
Arcs:					Limited					DDS:					—														
Search:					—					DJM:					—														
Track:					12–6					AJM:					—														
Lock-On:					6					BJM:					—														
Guns:					Two 30 mm Aden					Technology:					Load Point Limits:					CL : 0–2									
To Hit:					6/3/2					None										1/2: 3–6									
Ammunition:					4.0										Weight Limit:					3,000 DT : 7+									
Gunsight:					TT+0/HT+1/BT+2										Station		Limit		Allowed Loads										
Ranging:					RE										1 and 2		1,400		BB FT										
AtA/AtG:					6/6										Load Notes:														
Bomb System:					Manual										1. May use 167 gal (760L) FTs.														
Notes:																													
1. The Commonwealth Aircraft Corporation (CAC) Sabre Mk.31 is a day fighter and fighter-bomber derived from the F-86F Sabre. It is also known as the Avon Sabre. The Mk.31 a development of the Mk.30 and has the early slatted wing replaced by the unslatted 6-3 wing, but retains the Rolls-Royce Avon 20 engine. The original variant described here lacks IRMs, and has only two weapon stations.																													
										VPs: 11/7/4/2										v1 0000000 0000-00-00T00:00:00									

CAC Sabre Mk.31 (1960 Upgrade)					Crew: Pilot									
Power APs/DPs/FPs: ○ <div><div>CL1/2DTFuel</div><div>AB— — — —</div><div>M1.51.51.01.0</div><div>N0.00.00.00.5</div><div>I0.50.51.00.0</div><div>SPBR0.50.51.0—</div></div>										Maneuver HFPs/DPs:				
										LR/DR1.01.0				
										VR0.0				
					Turn DPs:					CL1/2DT				
TT0.01.01.0														
HT1.01.01.0														
BT2.03.03.0														
ET— — —														
Cruise Speed: 5.5 Restr. Arcs: — Climb Speed: 3.5 Blind Arcs: 30– Visibility: 5 Internal Fuel: 160 Size: +0 AtA Refuel: No Vulnerability: +0 Ejection Seat: Std														
Speeds and Ceilings						Climb Capabilities								
Alt. Band	Conf. Ceil.	CL 52	1/2 48	DT 42	Dive Speed	CL AB	Oth	1/2 AB	Oth	DT AB	Oth	Alt. Band		
EH+	46+	2.5 – 6.0	3.0 – 5.0	—	6.5	—	0.5	—	0.5	—	—	EH+		
VH	36–45	2.5 – 6.0	2.5 – 5.0	3.0 – 5.0	6.5	—	1.0	—	1.0	—	0.5	VH		
HI	26–35	2.0 – 6.0	2.5 – 5.5	2.5 – 5.0	7.0	—	1.5	—	1.0	—	0.5	HI		
MH	17–25	2.0 – 6.5	2.5 – 5.5	2.5 – 5.5	7.0	—	1.5	—	1.5	—	1.0	MH		
ML	8–16	2.0 – 6.5	2.0 – 6.0	2.5 – 5.5	7.5	—	2.0	—	1.5	—	1.0	ML		
LO	0–7	1.5 – 7.0	1.5 – 6.5	2.0 – 6.0	7.5	—	2.0	—	2.0	—	1.5	LO		
Radar: APG-56					ECM: IFF		Weapon Stations Diagram:							
ECCM: 0					RWR: —									
Arcs: Limited					DDS: —									
Search: —					DJM: —									
Track: 12–6					AJM: —									
Lock-On: 6					BJM: —									
Guns: Two 30 mm Aden					Technology:		Load Point Limits: CL : 0–2							
To Hit: 6/3/2					None		1/2: 3–6							
Ammunition: 4.0							Weight Limit: 5,000 DT : 7+							
Gunsight: TT+0/HT+1/BT+2							StationLimitAllowed Loads							
Ranging: RE							1 and 41,400BB FT							
AtA/AtG: 6/6							2 and 31,000BB FT IRM							
Bomb System: Manual							Load Notes:							
Notes: 1. The Commonwealth Aircraft Corporation (CAC) Sabre Mk.31 is a day fighter and fighter-bomber derived from the F-86F. It is also known as the Avon Sabre. The Mk.31 is a development of the Mk.30 and has the early slatted wing replaced by the unslatted 6-3 wing, but retains the Rolls-Royce Avon 20 engine. This 1960 upgrade variant is fitted with two additional weapon stations for IRMs or, when used as a fighter-bomber, bombs.					1. May use 167 gal (760L) FTs on stations 1 and 4 and 100 gal (450L) FTs on stations 2 and 3.									
					2. May use AIM-9B IRMs.									
					VPs: 11/7/4/2						v1 0000000 0000-00-00T00:00:00			

CAC Sabre Mk.32					<div>Crew: Pilot</div> <div>Maneuver HFPs/DPs:</div> <div>LR/DR1.01.0</div> <div>VR0.0</div> <div>Turn DPs:</div> <div>CL1/2DT</div> <div>TT0.01.01.0</div> <div>HT1.01.01.0</div> <div>BT2.03.03.0</div> <div>ET— — —</div>						
										<div>Power APs/DPs/FPs: ○</div> <div>CL1/2DTFuel</div> <div>AB— — — —</div> <div>M1.51.51.01.0</div> <div>N0.00.00.00.5</div> <div>I0.50.51.00.0</div> <div>SPBR0.50.51.0—</div>	
<div>Cruise Speed: 5.5</div> <div>Restr. Arcs: —</div> <div>Climb Speed: 3.5</div> <div>Blind Arcs: 30–</div> <div>Visibility: 5</div> <div>Internal Fuel: 183</div> <div>Size: +0</div> <div>AtA Refuel: No</div> <div>Vulnerability: +0</div> <div>Ejection Seat: Std</div>											
Speeds and Ceilings						Climb Capabilities					
Alt. Band	Conf. Ceil.	CL 52	1/2 48	DT 42	Dive Speed	CL AB Oth	1/2 AB Oth	DT AB Oth	Alt. Band		
EH+	46+	2.5 – 6.0	3.0 – 5.0	—	6.5	— 0.5	— 0.5	— —	EH+		
VH	36–45	2.5 – 6.0	2.5 – 5.0	3.0 – 5.0	6.5	— 1.0	— 1.0	— 0.5	VH		
HI	26–35	2.0 – 6.0	2.5 – 5.5	2.5 – 5.0	7.0	— 1.5	— 1.0	— 0.5	HI		
MH	17–25	2.0 – 6.5	2.5 – 5.5	2.5 – 5.5	7.0	— 1.5	— 1.5	— 1.0	MH		
ML	8–16	2.0 – 6.5	2.0 – 6.0	2.5 – 5.5	7.5	— 2.0	— 1.5	— 1.0	ML		
LO	0–7	1.5 – 7.0	1.5 – 6.5	2.0 – 6.0	7.5	— 2.0	— 2.0	— 1.5	LO		
Radar: APG-56			ECM: IFF		Weapon Stations Diagram:						
ECCM: 0			RWR: —								
Arcs: Limited			DDS: —								
Search: —			DJM: —								
Track: 12–6			AJM: —								
Lock-On: 6			BJM: —								
Guns: Two 30 mm Aden			Technology: None		Load Point Limits: CL : 0–2						
To Hit: 6/3/2					1/2: 3–6						
Ammunition: 4.0					Weight Limit: 5,000 DT : 7+						
Gunsight: TT+0/HT+1/BT+2					<div>StationLimitAllowed Loads</div> <div>1 and 41,400BB FT</div> <div>2 and 31,000BB FT IRM</div> <div>5–8 and 9–12280RK</div>						
Ranging: RE					Load Notes:						
AtA/AtG: 6/6											
Bomb System: Manual											
Notes: 1. The Commonwealth Aircraft Corporation (CAC) Sabre Mk.32 is a day fighter and fighter-bomber. It is also known as the Avon Sabre. The Mk.32 a development of the Mk.31 and has more powerful Rolls-Royce Avon 26 engine in place of the the Avon 20 engine, but retains the unslatted 6-3 wing.					1. Either stations 1 to 4 or stations 5 to 12 can be used.						
					2. May use 167 gal (760L) FTs on stations 1 and 4 and 100 gal (450L) FTs on stations 2 and 3.						
					3. From 1960, may use AIM-9B IRMs.						
					4. From 1962, stations 5 to 12 may each carry three SURA 80R RKs.						
					VPs: 12/8/4/2						
					v1 00000000 0000-00-00T00:00:00						