


Hawker Sea Fury and Fury

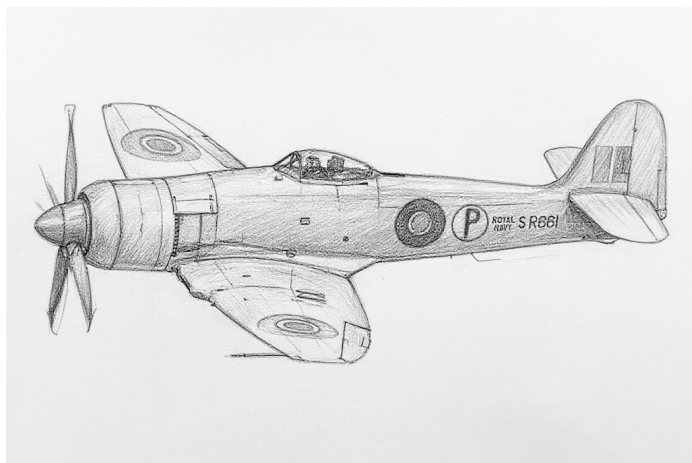

The Hawker Sea Fury was a post-WW2 propeller-driven fighter bomber.

The Sea Fury was a descendant of the WW2 Hawker Tempest fighter bomber, which was designed to be a long-range fighter for use by the RAF in the war against Japan. After WW2 ended, the RAF no longer had an interest, but the RN acquired a version adapted for carrier operations as a replacement for its Seafires, which were not well suited to carrier operations, and Corsairs, which had to be returned to the US as the Lend-Lease program ended.

The Sea Fury was powered by a Centaur radial engine, armed with four 20 mm guns, and had a bubble canopy with an excellent view except under the nose.

Versions

Sea Fury F.10

The initial version of the Sea Fury was the F.10 day fighter. It entered service in the RN in 1947, but seems to have been quickly replaced by the FB.11 version.

Sea Fury F.11

The FB.11 was derived from the F.10 and had added armor and weapon stations to perform better as a fighter-bomber.

It served in the RN from 1948 to 1956, RAN from 1948 to 1959, and RCN from 1948 to 1956. It was replaced in the RN by the Sea Hawk and Attacker starting in 1953, in the RAN by the Sea Venom in 1956, and in the RCN by the F2H Banshees starting in 1956. New and ex-RN FB.11s also served in the Burmese Air Force from 1958 to 1968, the Cuban Air Force from 1957, the Egyptian Air Force, and the Pakistan Air Force.

Sea Fury T.20

The T.20 was a two-seater trainer. To compensate for the weight of the additional cockpit, the armament was reduced to two 20 mm cannons.

It served with the RN. Some ex-RN aircraft were later used by the Burmese Air Force from 1958 to 1968 and by the Cuban Air Force from 1957.

Sea Fury F.50 and FB.50

The F.50 and FB.50 were export versions of the F.10 and FB.11 with minor changes. Some were license-built by Fokker.

The F.50 and FB.50 were used by the Royal Netherlands Navy from 1947 and were eventually replaced by Sea Hawks.

Fury and Fury FB.60

The Fury (with no version designation but sometimes referred to as the "Baghdad Fury") and the FB.60 were export versions of the FB.11 with carrier-specific equipment removed.

The Fury was used by the Iraqi Air Force from 1946 until 1969, being replaced by the Su-7 starting in 1967. The FB.60 was used by the Pakistan Air Force from 1950 until 1960, being replaced by Sabres starting in 1955.

Fury Trainer and Fury T.61

The Fury Trainer (with no version designation) and the T.61 were export versions of the T.20 with carrier-specific equipment removed.

The Fury Trainer was used by the Iraqi Air Force. The T.61 was used by the Pakistan Air Force.

Armament and Stores

A typical air-to-ground load was two 500-lb or 1000-lb bombs or twelve RP-3 rockets. It could also carry two 90-gallon fuel tanks to extend its range.

Combat

The RN and RAN used the Sea Fury as a fighter-bomber in the Korean War. They also saw combat with the Netherlands Royal Navy in the Dutch East Indies, with the Cuban Air Force against Fidel Castro's revolutionaries, and with the Cuban Revolutionary Air Force during the Bay of Pigs invasion.

ADCs

- Sea Fury F.10
- Sea Fury FB.11
- Sea Fury T.20
- Sea Fury F.50
- Sea Fury FB.50
- Sea Fury FB.60
- Sea Fury T.61
- Fury
- Fury Trainer

Photo Credit

- Hawker Sea Fury: Alan Wilson (CC BY-SA 2.0)

Sea Fury F.10										Crew: Pilot									
										Maneuver DPs: LR/DR 1.5 VR 1.5									
Turn DPs: CL 1/2 DT TT 0.25 0.25 0.25 HT 0.25 0.75 0.75 BT 0.75 0.75 0.75 ET 1.25 — —																			
										Power APs/DPs: ☹ CL 1/2 DT Fuel FT 2.0 1.5 1.0 0.5 HT 0.5 0.5 0.5 0.2 N 0.0 0.0 0.0 0.1 I 1.0 1.0 1.0 0.0 SPBR — — — —									
If speed ≥ 3.5, reduce power by 0.5. If speed ≥ 4.5, reduce power by 1.0.																			
					Cruise Spd. CL: 3.0 Restr. Arcs: 180L Climb Spd.: 1.5 Blind Arcs: 30– Visibility: 6 Internal Fuel: 70 Size: +0 AtA Refuel: No Vulnerability: +0 Ejection Seat: None														
Speeds and Ceilings										Climb Capabilities									
Alt. Conf.		CL		1/2		DT		Dive		CL		1/2		DT					
Band Ceil.		36		29		21		Speed		AB Oth		AB Oth		AB Oth					
EH+ 46+		—		—		—		—		— —		— —		— —		EH+			
VH 36–45		2.0 – 4.0		—		—		5.5		— 0.5		— —		— —		VH			
HI 26–35		1.5 – 4.0		2.0 – 3.5		—		6.0		— 0.5		— 0.5		— —		HI			
MH 17–25		1.5 – 4.5		1.5 – 4.0		1.5 – 3.5		6.0		— 0.5		— 0.5		— 0.5		MH			
ML 8–16		1.0 – 4.5		1.5 – 3.5		1.5 – 3.0		6.0		— 1.0		— 0.5		— 0.5		ML			
LO 0–7		1.0 – 4.0		1.0 – 3.5		1.5 – 3.0		5.5		— 1.0		— 1.0		— 1.0		LO			
Radar: —					ECM: IFF					Weapon Stations Diagram:									
ECCM: —					RWR: —														
Arcs: —					DDS: —														
Search: —					DJM: —														
Track: —					AJM: —														
Lock-On: —					BJM: —														
Guns: Four 20 mm Hispano V					Technology:					Load Point Limits: CL : < 3									
To Hit: 6/4/3					None					1/2: < 5									
Ammunition: 5.5										Weight Limit: 3,400 DT : ≥ 5									
Gunsight: TT+0/HT+1/BT+2										Station Limit Allowed Loads									
Ranging: —										1 and 2 700 FT									
AtA/AtG: 5/6*										Load Notes:									
Bomb System: Manual										1. Stations 1 and 2 can each carry a 90 gal (400L) FT.									
Notes:																			
1. The Hawker Sea Fury F.10 is a carrier-capable day fighter.																			
2. High transonic drag (HTD). Low bleed rate (LBR).																			

Sea Fury FB.11										Crew: Pilot									
										Maneuver DPs: LR/DR 1.5 VR 1.5									
Turn DPs: CL 1/2 DT TT 0.25 0.25 0.25 HT 0.25 0.75 0.75 BT 0.75 0.75 0.75 ET 1.25 — —																			
										Power APs/DPs: ☹ CL 1/2 DT Fuel FT 2.0 1.5 1.0 0.5 HT 0.5 0.5 0.5 0.2 N 0.0 0.0 0.0 0.1 I 1.0 1.0 1.0 0.0 SPBR — — — — If speed ≥ 3.5, reduce power by 0.5. If speed ≥ 4.5, reduce power by 1.0.					Cruise Spd. CL: 3.0 Restr. Arcs: 180L Climb Spd.: 1.5 Blind Arcs: 30– Visibility: 6 Internal Fuel: 70 Size: +0 AtA Refuel: No Vulnerability: +1 Ejection Seat: None				
Speeds and Ceilings						Climb Capabilities													
Alt. Band	Conf. Ceil.	CL 36	1/2 29	DT 21	Dive Speed	CL AB	Oth	1/2 AB	Oth	DT AB	Oth								
EH+	46+	—	—	—	—	—	—	—	—	—	—	EH+							
VH	36–45	2.0 – 4.0	—	—	5.5	—	0.5	—	—	—	—	VH							
HI	26–35	1.5 – 4.0	2.0 – 3.5	—	6.0	—	0.5	—	0.5	—	—	HI							
MH	17–25	1.5 – 4.5	1.5 – 4.0	1.5 – 3.5	6.0	—	0.5	—	0.5	—	0.5	MH							
ML	8–16	1.0 – 4.5	1.5 – 3.5	1.5 – 3.0	6.0	—	1.0	—	0.5	—	0.5	ML							
LO	0–7	1.0 – 4.0	1.0 – 3.5	1.5 – 3.0	5.5	—	1.0	—	1.0	—	1.0	LO							

Radar: —		ECM: IFF		Weapon Stations Diagram:			
ECCM: —		RWR: —					
Arcs: —		DDS: —					
Search: —		DJM: —					
Track: —		AJM: —					
Lock-On: —		BJM: —					
Guns: Four 20 mm Hispano V		Technology:		Load Point Limits: CL : < 3			
To Hit: 6/4/3		None		1/2: < 5			
Ammunition: 5.5				Weight Limit: 3,400 DT : ≥ 5			
Gunsight: TT+0/HT+1/BT+2				Station Limit Allowed Loads			
Ranging: —				1 and 4 1,000 BB			
AtA/AtG: 5/6*				2 and 3 700 FT			
				5–7 and 8–10 200 RK			
Bomb System: Manual				Load Notes:			
Notes: 1. The Hawker Sea Fury FB.11 is a carrier-capable day fighter and fighter-bomber. The FB.11 is a development of the original F.10 fighter with additional armor and underwing weapon stations to better carry out air-to-ground missions. 2. High transonic drag (HTD). Low bleed rate (LBR).				1. Either stations 1 and 4 or stations 5 to 10 can be used.			
				2. Stations 2 and 3 can each carry a 90 gal (400L) FT.			
				3. Stations 5 to 10 can each carry two RP-3 RKs.			
				VPs: 7/5/2/1			
				v3 0000000 0000-00-00T00:00:00			

Sea Fury T.20										Crew: Pilot and Observer				
										Maneuver DPs:				
LR/DR		1.5												
VR		1.5												
Power APs/DPs: ☉										Turn DPs:				
	CL	1/2	DT	Fuel			CL	1/2	DT					
FT	2.0	1.5	1.0	0.5		TT	0.25	0.25	0.25					
HT	0.5	0.5	0.5	0.2		HT	0.25	0.75	0.75					
N	0.0	0.0	0.0	0.1		BT	0.75	0.75	0.75					
I	1.0	1.0	1.0	0.0		ET	1.25	—	—					
SPBR	—	—	—	—										
If speed ≥ 3.5, reduce power by 0.5. If speed ≥ 4.5, reduce power by 1.0.					Cruise Spd. CL: 3.0 Restr. Arcs: 180L Climb Spd.: 1.5 Blind Arcs: 30– Visibility: 6 Internal Fuel: 70 Size: +0 AtA Refuel: No Vulnerability: +0 Ejection Seat: None									
Speeds and Ceilings							Climb Capabilities							
Alt.	Conf.	CL		1/2		DT	Dive	CL		1/2		DT		
Band	Ceil.	36		29		21	Speed	AB	Oth	AB	Oth	AB	Oth	
EH+	46+	—		—		—	—	—	—	—	—	—	—	
VH	36–45	2.0 – 4.0		—		—	5.5	—	0.5	—	—	—	—	
HI	26–35	1.5 – 4.0		2.0 – 3.5		—	6.0	—	0.5	—	0.5	—	—	
MH	17–25	1.5 – 4.5		1.5 – 4.0		1.5 – 3.5	6.0	—	0.5	—	0.5	—	0.5	
ML	8–16	1.0 – 4.5		1.5 – 3.5		1.5 – 3.0	6.0	—	1.0	—	0.5	—	0.5	
LO	0–7	1.0 – 4.0		1.0 – 3.5		1.5 – 3.0	5.5	—	1.0	—	1.0	—	1.0	
EH+														
VH														
HI														
MH														
ML														
LO														

Radar:			—		ECM:		IFF		Weapon Stations Diagram:				
ECCM:			—		RWR:		—						
Arcs:			—		DDS:		—						
Search:			—		DJM:		—						
Track:			—		AJM:		—						
Lock-On:			—		BJM:		—						
Guns:			Two 20 mm Hispano V			Technology:			Load Point Limits:				
To Hit:			6/4/3			None			CL : < 3				
Ammunition:			5.5						1/2: < 5				
Gunsight:			TT+0/HT+1/BT+2						Weight Limit:				
Ranging:			—						3,400				
AtA/AtG:			4/5*						DT : ≥ 5				
Bomb System:			Manual						Station				
									Limit				
									Allowed Loads				
									1 and 4				
									1,000				
									BB				
									2 and 3				
									700				
									FT				
									5–7 and 8–10				
									200				
									RK				
									Load Notes:				
									1. Either stations 1 and 4 or stations 5 to 10 can be used.				
									2. Stations 2 and 3 can each carry a 90 gal (400L) FT.				
									3. Stations 5 to 10 can each carry two RP-3 RKs.				
			</										

Sea Fury F.50										Crew: Pilot				
										Maneuver DPs:				
LR/DR		1.5												
VR		1.5												
Power APs/DPs: ☹				Turn DPs:										
CL	1/2	DT	Fuel	Cruise Spd. CL: 3.0 Restr. Arcs: 180L Climb Spd.: 1.5 Blind Arcs: 30– Visibility: 6 Internal Fuel: 70 Size: +0 AtA Refuel: No Vulnerability: +0 Ejection Seat: None	TT	CL	1/2	DT						
FT	2.0	1.5	1.0		0.5	0.25	0.25	0.25						
HT	0.5	0.5	0.5		0.2	0.25	0.75	0.75						
N	0.0	0.0	0.0		0.1	0.75	0.75	0.75						
I	1.0	1.0	1.0		0.0	1.25	—	—						
SPBR	—	—	—		—									
If speed ≥ 3.5, reduce power by 0.5. If speed ≥ 4.5, reduce power by 1.0.														
Speeds and Ceilings						Climb Capabilities								
Alt. Band	Conf. Ceil.	CL 36	1/2 29	DT 21	Dive Speed	CL AB	Oth	1/2 AB	Oth	DT AB	Oth			
EH+	46+	—	—	—	—	—	—	—	—	—	—	EH+		
VH	36–45	2.0 – 4.0	—	—	5.5	—	0.5	—	—	—	—	VH		
HI	26–35	1.5 – 4.0	2.0 – 3.5	—	6.0	—	0.5	—	0.5	—	—	HI		
MH	17–25	1.5 – 4.5	1.5 – 4.0	1.5 – 3.5	6.0	—	0.5	—	0.5	—	0.5	MH		
ML	8–16	1.0 – 4.5	1.5 – 3.5	1.5 – 3.0	6.0	—	1.0	—	0.5	—	0.5	ML		
LO	0–7	1.0 – 4.0	1.0 – 3.5	1.5 – 3.0	5.5	—	1.0	—	1.0	—	1.0	LO		

Radar: — ECCM: — Arcs: — Search: — Track: — Lock-On: —	ECM: IFF RWR: — DDS: — DJM: — AJM: — BJM: —	Weapon Stations Diagram:							
Guns: Four 20 mm Hispano V To Hit: 6/4/3 Ammunition: 5.5 Gunsight: TT+0/HT+1/BT+2 Ranging: — AtA/AtG: 5/6*	Technology: None	Load Point Limits: CL : < 3 1/2: < 5 Weight Limit: 3,400 DT : ≥ 5							
Bomb System: Manual		<table><tr><td>Station</td><td>Limit</td><td>Allowed Loads</td></tr><tr><td>1 and 2</td><td>700</td><td>FT</td></tr></table> Load Notes: 1. Stations 1 and 2 can each carry a 90 gal (400L) FT.	Station	Limit	Allowed Loads	1 and 2	700	FT	
Station	Limit	Allowed Loads							
1 and 2	700	FT							
Notes: 1. The Hawker Sea Fury F.50 is a carrier-capable day fighter. It is an export version of the F.10. 2. High transonic drag (HTD). Low bleed rate (LBR).									
		VPs: 6/4/2/1	v3 0000000 0000-00-00T00:00:00						

Sea Fury FB.50										Crew: Pilot				
										Maneuver DPs: LR/DR 1.5 VR 1.5				
Power APs/DPs: ☹ CL 1/2 DT Fuel FT 2.0 1.5 1.0 0.5 HT 0.5 0.5 0.5 0.2 N 0.0 0.0 0.0 0.1 I 1.0 1.0 1.0 0.0 SPBR — — — —														
If speed ≥ 3.5, reduce power by 0.5. If speed ≥ 4.5, reduce power by 1.0.														
Cruise Spd. CL: 3.0 Restr. Arcs: 180L Climb Spd.: 1.5 Blind Arcs: 30– Visibility: 6 Internal Fuel: 70 Size: +0 AtA Refuel: No Vulnerability: +1 Ejection Seat: None														
Speeds and Ceilings						Climb Capabilities								
Alt. Band	Conf. Ceil.	CL 36	1/2 29	DT 21	Dive Speed	CL AB	Oth	1/2 AB	Oth	DT AB	Oth			
EH+	46+	—	—	—	—	—	—	—	—	—	—	EH+		
VH	36–45	2.0 – 4.0	—	—	5.5	—	0.5	—	—	—	—	VH		
HI	26–35	1.5 – 4.0	2.0 – 3.5	—	6.0	—	0.5	—	0.5	—	—	HI		
MH	17–25	1.5 – 4.5	1.5 – 4.0	1.5 – 3.5	6.0	—	0.5	—	0.5	—	0.5	MH		
ML	8–16	1.0 – 4.5	1.5 – 3.5	1.5 – 3.0	6.0	—	1.0	—	0.5	—	0.5	ML		
LO	0–7	1.0 – 4.0	1.0 – 3.5	1.5 – 3.0	5.5	—	1.0	—	1.0	—	1.0	LO		
Radar: —			ECM: IFF			Weapon Stations Diagram:								
ECCM: —			RWR: —											
Arcs: —			DDS: —											
Search: —			DJM: —											
Track: —			AJM: —											
Lock-On: —			BJM: —											
Guns: Four 20 mm Hispano V			Technology: None			Load Point Limits: CL : < 3								
To Hit: 6/4/3						1/2: < 5								
Ammunition: 5.5						Weight Limit: 3,400 DT : ≥ 5								
Gunsight: TT+0/HT+1/BT+2						Station Limit Allowed Loads								
Ranging: —						1 and 4 1,000 BB								
AtA/AtG: 5/6*			2 and 3 700 FT											
Bomb System: Manual			5–7 and 8–10 200 RK											
Notes: 1. The Hawker Sea Fury FB.50 is a carrier-capable day fighter and fighter-bomber. It is an export version of the FB.11. 2. High transonic drag (HTD). Low bleed rate (LBR).						Load Notes:								
						1. Either stations 1 and 4 or stations 5 to 10 can be used.								
						2. Stations 2 and 3 can each carry a 90 gal (400L) FT.								
						3. Stations 5 to 10 can each carry two RP-3 RKs.								
VPs: 7/5/2/1						v3 0000000 0000-00-00T00:00:00								

Sea Fury FB.60										Crew: Pilot				
										Maneuver DPs: LR/DR 1.5 VR 1.5				
Power APs/DPs: ☹ CL 1/2 DT Fuel FT 2.0 1.5 1.0 0.5 HT 0.5 0.5 0.5 0.2 N 0.0 0.0 0.0 0.1 I 1.0 1.0 1.0 0.0 SPBR — — — — If speed ≥ 3.5, reduce power by 0.5. If speed ≥ 4.5, reduce power by 1.0.														
										Cruise Spd. CL: 3.0 Restr. Arcs: 180L Climb Spd.: 1.5 Blind Arcs: 30– Visibility: 6 Internal Fuel: 70 Size: +0 AtA Refuel: No Vulnerability: +1 Ejection Seat: None				
Speeds and Ceilings						Climb Capabilities								
Alt. Band	Conf. Ceil.	CL 36	1/2 29	DT 21	Dive Speed	CL AB	Oth	1/2 AB	Oth	DT AB	Oth			
EH+	46+	—	—	—	—	—	—	—	—	—	—	EH+		
VH	36–45	2.0 – 4.0	—	—	5.5	—	0.5	—	—	—	—	VH		
HI	26–35	1.5 – 4.0	2.0 – 3.5	—	6.0	—	0.5	—	0.5	—	—	HI		
MH	17–25	1.5 – 4.5	1.5 – 4.0	1.5 – 3.5	6.0	—	0.5	—	0.5	—	0.5	MH		
ML	8–16	1.0 – 4.5	1.5 – 3.5	1.5 – 3.0	6.0	—	1.0	—	0.5	—	0.5	ML		
LO	0–7	1.0 – 4.0	1.0 – 3.5	1.5 – 3.0	5.5	—	1.0	—	1.0	—	1.0	LO		
Radar: —			ECM: IFF			Weapon Stations Diagram:								
ECCM: —			RWR: —											
Arcs: —			DDS: —											
Search: —			DJM: —											
Track: —			AJM: —											
Lock-On: —			BJM: —											
Guns: Four 20 mm Hispano V			Technology: None			Load Point Limits: CL : < 3								
To Hit: 6/4/3						1/2: < 5								
Ammunition: 5.5						Weight Limit: 3,400 DT : ≥ 5								
Gunsight: TT+0/HT+1/BT+2						Station Limit Allowed Loads								
Ranging: —						1 and 4 1,000 BB								
AtA/AtG: 5/6*			2 and 3 700 FT											
Bomb System: Manual			5–7 and 8–10 200 RK											
			Load Notes:											
Notes: 1. The Hawker Sea Fury FB.60 is a day fighter and fighter-bomber. It is an export version of the FB.11 with carrier-specific equipment removed. 2. High transonic drag (HTD). Low bleed rate (LBR).			1. Either stations 1 and 4 or stations 5 to 10 can be used.											
			2. Stations 2 and 3 can each carry a 90 gal (400L) FT.											
			3. Stations 5 to 10 can each carry two RP-3 RKs.											
			VPs: 7/5/2/1											
			v3 0000000 0000-00-00T00:00:00											

Sea Fury T.61										Crew: Pilot and Observer				
										Maneuver DPs:				
LR/DR		1.5												
VR		1.5												
Power APs/DPs: ☹										Turn DPs:				
	CL	1/2	DT	Fuel			CL	1/2	DT					
FT	2.0	1.5	1.0	0.5		TT	0.25	0.25	0.25					
HT	0.5	0.5	0.5	0.2		HT	0.25	0.75	0.75					
N	0.0	0.0	0.0	0.1		BT	0.75	0.75	0.75					
I	1.0	1.0	1.0	0.0		ET	1.25	—	—					
SPBR	—	—	—	—										
If speed ≥ 3.5, reduce power by 0.5. If speed ≥ 4.5, reduce power by 1.0.					Cruise Spd. CL: 3.0 Restr. Arcs: 180L Climb Spd.: 1.5 Blind Arcs: 30– Visibility: 6 Internal Fuel: 70 Size: +0 AtA Refuel: No Vulnerability: +0 Ejection Seat: None									
Speeds and Ceilings							Climb Capabilities							
Alt. Band	Conf. Ceil.	CL 36		1/2 29		DT 21	Dive Speed	CL AB Oth		1/2 AB Oth		DT AB Oth		
EH+	46+	—		—		—	—	— —		— —		— —	EH+	
VH	36–45	2.0 – 4.0		—		—	5.5	— 0.5		— —		— —	VH	
HI	26–35	1.5 – 4.0		2.0 – 3.5		—	6.0	— 0.5		— 0.5		— —	HI	
MH	17–25	1.5 – 4.5		1.5 – 4.0		1.5 – 3.5	6.0	— 0.5		— 0.5		— 0.5	MH	
ML	8–16	1.0 – 4.5		1.5 – 3.5		1.5 – 3.0	6.0	— 1.0		— 0.5		— 0.5	ML	
LO	0–7	1.0 – 4.0		1.0 – 3.5		1.5 – 3.0	5.5	— 1.0		— 1.0		— 1.0	LO	

Radar:			—		ECM:		IFF		Weapon Stations Diagram:				
ECCM:			—		RWR:		—						
Arcs:			—		DDS:		—						
Search:			—		DJM:		—						
Track:			—		AJM:		—						
Lock-On:			—		BJM:		—						
Guns:			Two 20 mm Hispano V			Technology:			Load Point Limits:				
To Hit:			6/4/3			None			CL : < 3				
Ammunition:			5.5						1/2: < 5				
Gunsight:			TT+0/HT+1/BT+2						Weight Limit: 3,400				
Ranging:			—						DT : ≥ 5				
AtA/AtG:			4/5*						Station Limit Allowed Loads				
Bomb System:			Manual						1 and 4 1,000 BB				
									2 and 3 700 FT				
									5–7 and 8–10 200 RK				
									Load Notes:				
									1. Either stations 1 and 4 or stations 5 to 10 can be used.				
									2. Stations 2 and 3 can each carry a 90 gal (400L) FT.				
									3. Stations 5 to 10 can each carry two RP-3 RKs.				

Fury										Crew: Pilot														
										Maneuver DPs: <div>LR/DR1.5</div> <div>VR1.5</div>														
Power APs/DPs: ☹ <div>CL1/2DTFuel</div> <div>FT2.01.51.00.5</div> <div>HT0.50.50.50.2</div> <div>N0.00.00.00.1</div> <div>I1.01.01.00.0</div> <div>SPBR— — — —</div>															Turn DPs: <div>CL1/2DT</div> <div>TT0.250.250.25</div> <div>HT0.250.750.75</div> <div>BT0.750.750.75</div> <div>ET1.25— —</div>									
																				Cruise Spd. CL: 3.0 Restr. Arcs: 180L Climb Spd.: 1.5 Blind Arcs: 30– Visibility: 6 Internal Fuel: 70 Size: +0 AtA Refuel: No Vulnerability: +1 Ejection Seat: None				
If speed ≥ 3.5, reduce power by 0.5. If speed ≥ 4.5, reduce power by 1.0.																								
Speeds and Ceilings										Climb Capabilities														
Alt. Conf.		CL		1/2		DT		Dive		CL		1/2		DT										
Band Ceil.		36		29		21		Speed		AB Oth		AB Oth		AB Oth										
EH+		46+		—		—		—		— —		— —		— —		EH+								
VH		36–45		2.0 – 4.0		—		5.5		— 0.5		— —		— —		VH								
HI		26–35		1.5 – 4.0		2.0 – 3.5		6.0		— 0.5		— 0.5		— —		HI								
MH		17–25		1.5 – 4.5		1.5 – 4.0		6.0		— 0.5		— 0.5		— 0.5		MH								
ML		8–16		1.0 – 4.5		1.5 – 3.5		6.0		— 1.0		— 0.5		— 0.5		ML								
LO		0–7		1.0 – 4.0		1.0 – 3.5		5.5		— 1.0		— 1.0		— 1.0		LO								

Radar: —			ECM: IFF			Weapon Stations Diagram:									
ECCM: —			RWR: —												
Arcs: —			DDS: —												
Search: —			DJM: —												
Track: —			AJM: —												
Lock-On: —			BJM: —												
Guns: Four 20 mm Hispano V			Technology:			Load Point Limits: CL : < 3									
To Hit: 6/4/3			None			1/2: < 5									
Ammunition: 5.5						Weight Limit: 3,400 DT : ≥ 5									
Gunsight: TT+0/HT+1/BT+2						Station Limit Allowed Loads									
Ranging: —						1 and 4 1,000 BB									
AtA/AtG: 5/6*						2 and 3 700 FT									
						5–7 and 8–10 200 RK									
Bomb System: Manual						Load Notes:									
Notes: 1. The Hawker Fury is a day fighter and fighter-bomber. It is an export version of the FB.11 with carrier-specific equipment removed. 2. High transonic drag (HTD). Low bleed rate (LBR).						1. Either stations 1 and 4 or stations 5 to 10 can be used.									
						2. Stations 2 and 3 can each carry a 90 gal (400L) FT.									
						3. Stations 5 to 10 can each carry two RP-3 RKs.									
						VPs: 7/5/2/1									
						v3 0000000 0000-00-00T00:00:00									

Fury Trainer										Crew: Pilot and Observer						
										Maneuver DPs:						
LR/DR		1.5														
VR		1.5														
Turn DPs:																
CL		1/2		DT												
TT		0.25		0.25												
HT		0.25		0.75												
BT		0.75		0.75												
ET		1.25		—												
Power APs/DPs: ☉ <div>CL1/2DTFuel</div> <div>FT2.01.51.00.5</div> <div>HT0.50.50.50.2</div> <div>N0.00.00.00.1</div> <div>I1.01.01.00.0</div> <div>SPBR— — — —</div>					Cruise Spd. CL: 3.0		Restr. Arcs: 180L									
					Climb Spd.: 1.5		Blind Arcs: 30–									
					Visibility: 6		Internal Fuel: 70									
					Size: +0		AtA Refuel: No									
If speed ≥ 3.5, reduce power by 0.5. If speed ≥ 4.5, reduce power by 1.0.					Vulnerability: +0		Ejection Seat: None									
Speeds and Ceilings						Climb Capabilities										
Alt. Band	Conf. Ceil.	CL 36		1/2 29		DT 21		Dive Speed		CL AB Oth		1/2 AB Oth		DT AB Oth		
EH+	46+	—		—		—		—		— —		— —		— —		EH+
VH	36–45	2.0 – 4.0		—		—		5.5		— 0.5		— —		— —		VH
HI	26–35	1.5 – 4.0		2.0 – 3.5		—		6.0		— 0.5		— 0.5		— —		HI
MH	17–25	1.5 – 4.5		1.5 – 4.0		1.5 – 3.5		6.0		— 0.5		— 0.5		— 0.5		MH
ML	8–16	1.0 – 4.5		1.5 – 3.5		1.5 – 3.0		6.0		— 1.0		— 0.5		— 0.5		ML
LO	0–7	1.0 – 4.0		1.0 – 3.5		1.5 – 3.0		5.5		— 1.0		— 1.0		— 1.0		LO

Radar: — ECCM: — Arcs: — Search: — Track: — Lock-On: —	ECM: IFF RWR: — DDS: — DJM: — AJM: — BJM: —	Weapon Stations Diagram:												
Guns: Two 20 mm Hispano V To Hit: 6/4/3 Ammunition: 5.5 Gunsight: TT+0/HT+1/BT+2 Ranging: — AtA/AtG: 4/5*	Technology: None	Load Point Limits: CL : < 3 1/2: < 5 Weight Limit: 3,400 DT : ≥ 5												
Bomb System: Manual		<table border="1"> <thead> <tr> <th>Station</th> <th>Limit</th> <th>Allowed Loads</th> </tr> </thead> <tbody> <tr> <td>1 and 4</td> <td>1,000</td> <td>BB</td> </tr> <tr> <td>2 and 3</td> <td>700</td> <td>FT</td> </tr> <tr> <td>5–7 and 8–10</td> <td>200</td> <td>RK</td> </tr> </tbody> </table>	Station	Limit	Allowed Loads	1 and 4	1,000	BB	2 and 3	700	FT	5–7 and 8–10	200	RK
Station	Limit	Allowed Loads												
1 and 4	1,000	BB												
2 and 3	700	FT												
5–7 and 8–10	200	RK												
Notes: 1. The Hawker Fury Trainer is a trainer. It is a export version of the T.20 with carrier-specific equipment removed. 2. High transonic drag (HTD). Low bleed rate (LBR).		Load Notes: 1. Either stations 1 and 4 or stations 5 to 10 can be used. 2. Stations 2 and 3 can each carry a 90 gal (400L) FT. 3. Stations 5 to 10 can each carry two RP-3 RKs.												
VPs: 6/4/2/1		v3 0000000 0000-00-00T00:00:00												