


MFF2 embedded details

- Electrical conditions (max rating and regular)

1.6V, 3V and 5V operating supply voltage ranges.

- Pinout and pin definitions

This Below is the default pinout configuration offered. This layout is compliant with MFF2 pinout as per ETSI TS 102 671.

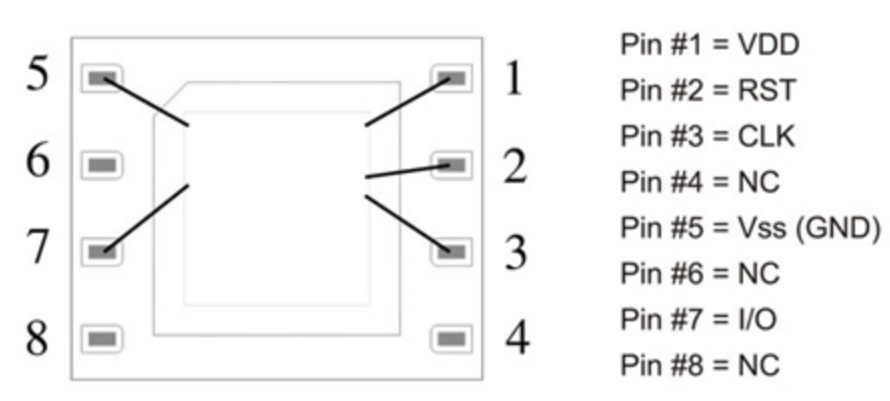

- PCB footprint dimensions

Below is the recommended PCB footprint.

