Eagle Eye

Eagle Eye Network Integration Guideline for GCX-ONE

1. Overview

This document describes the required client-side configuration and GCX-ONE-side onboarding steps to integrate Eagle Eye Networks with the GCX-ONE platform.The integration uses Eagle Eye Bridge identifiers to discover securely and register devices in GCX-ONE.

2. Client-Side Configuration (Eagle Eye)

2.1 Bridge Settings

This section provides hardware, network, and identification details of the selected Eagle Eye Bridge. These parameters are required for validation and onboarding in GCX-ONE.

Important:

Ensure the bridge has stable WAN connectivity and is successfully registered in the Eagle Eye Cloud before proceeding with GCX-ONE onboarding.

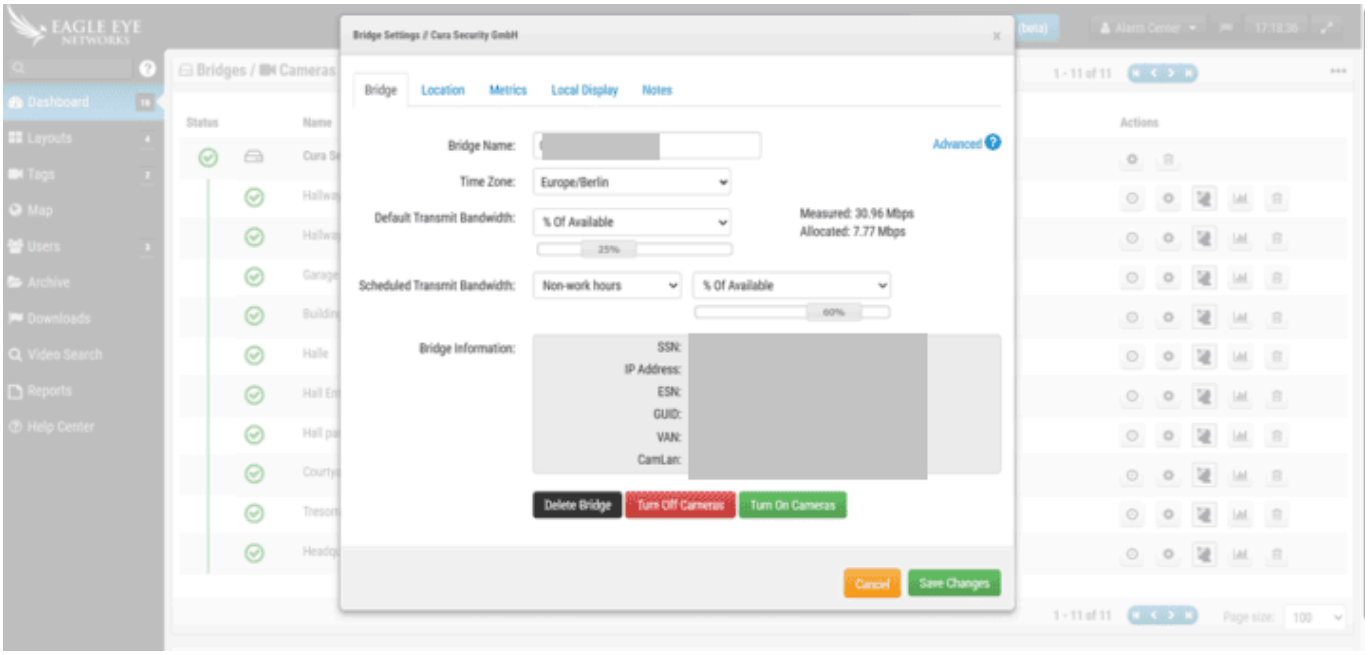

2.2 User Settings (Eagle Eye Cloud)

The following user-level settings must be validated before integration:

A valid **Eagle Eye Cloud** user account with administrative privileges at the reseller level or customer level.

View bridge details (ESN, GUID).

Manage devices and camera assignments.

Permission to:

The bridge must be in an Online / Connected state.

Time synchronization (NTP recommended) must be enabled on the bridge.

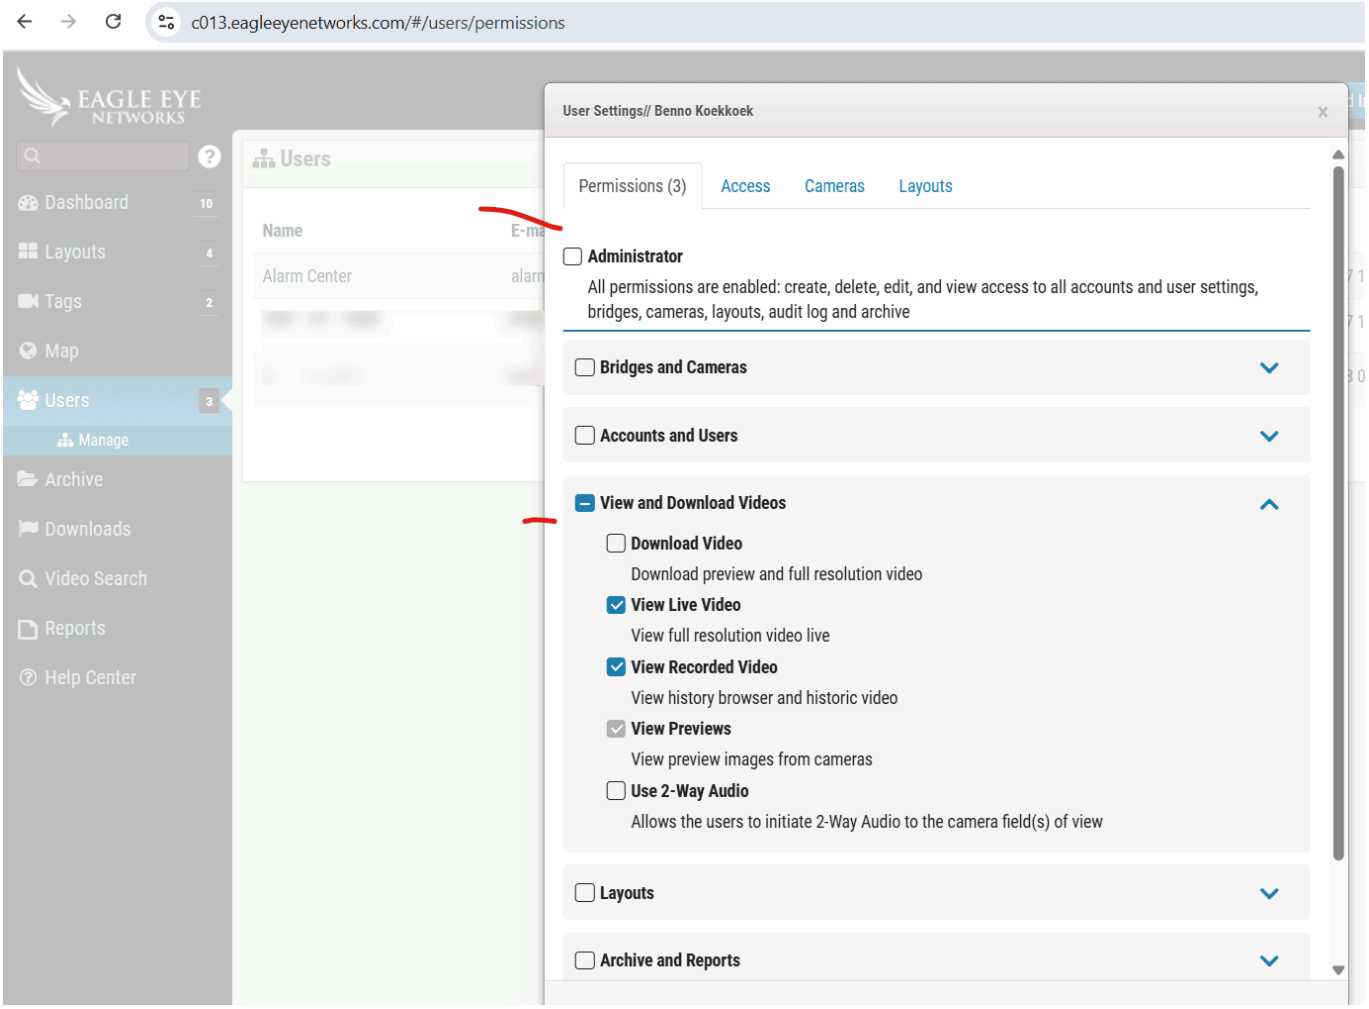

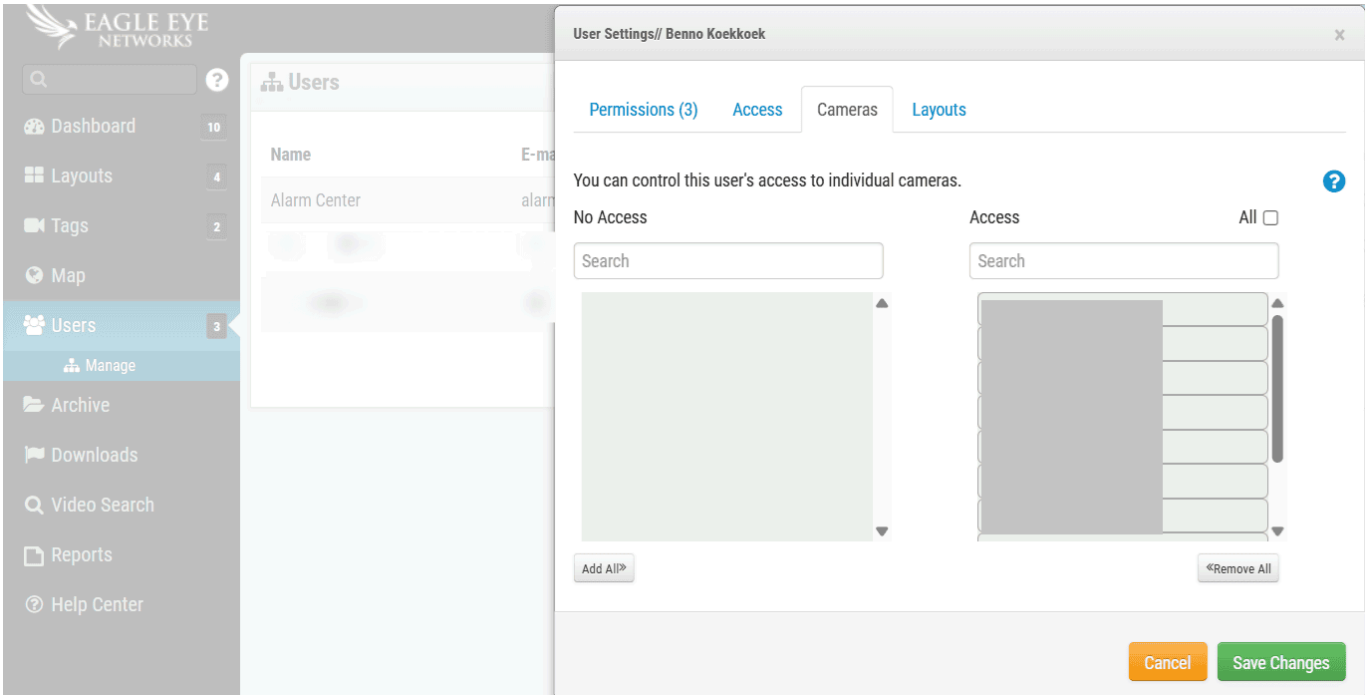

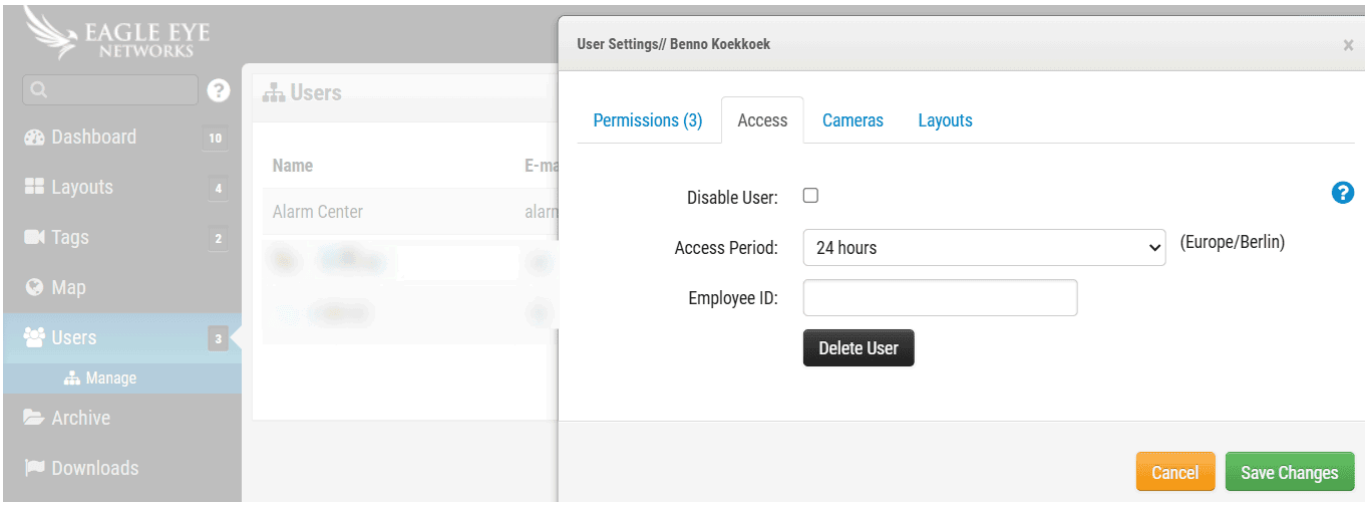

3. GCX-ONE Configuration Steps

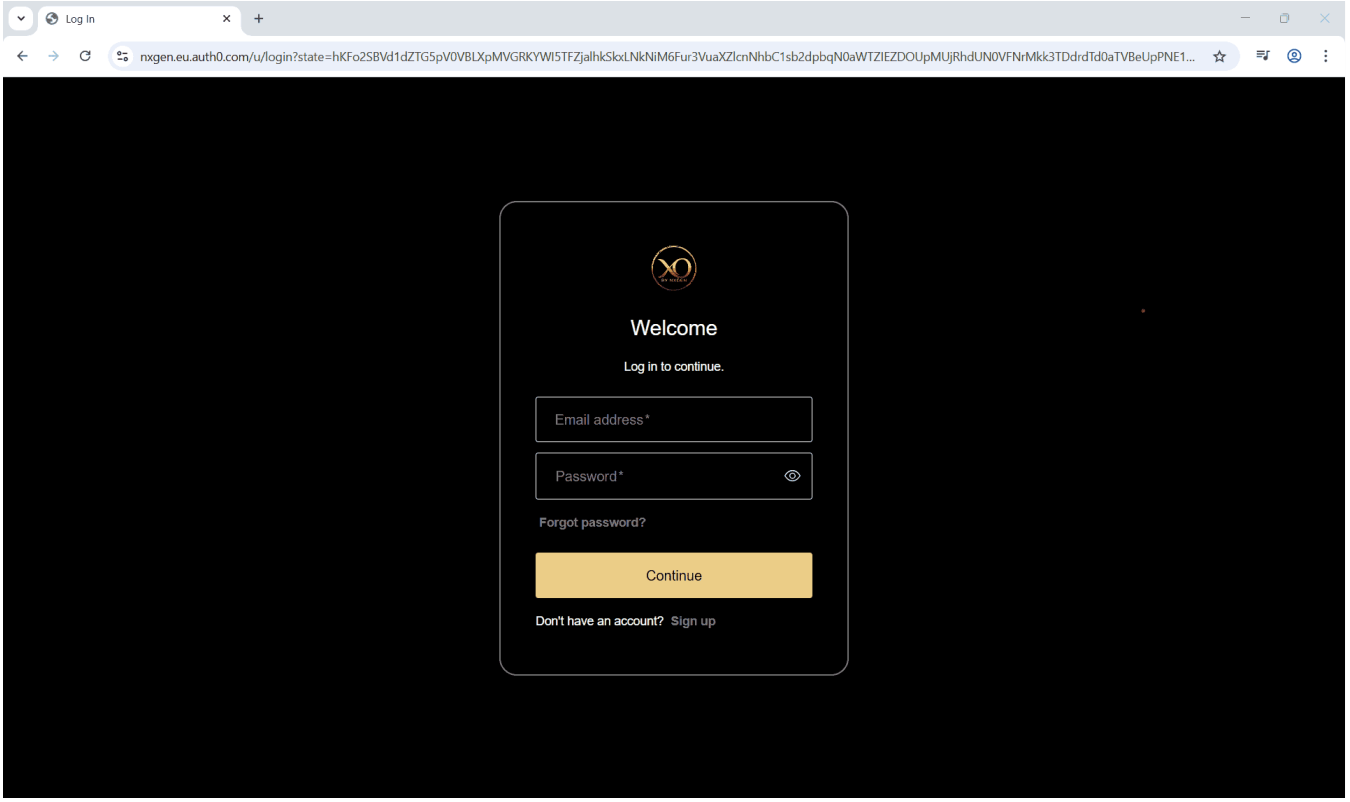

Step 1: Log in to **GCX-ONE**.

Step 2: Click on the **Configuration** menu.

Step 3: At the Service Provider level, click on **Customers**.

Step 4: Click the **Add** button.

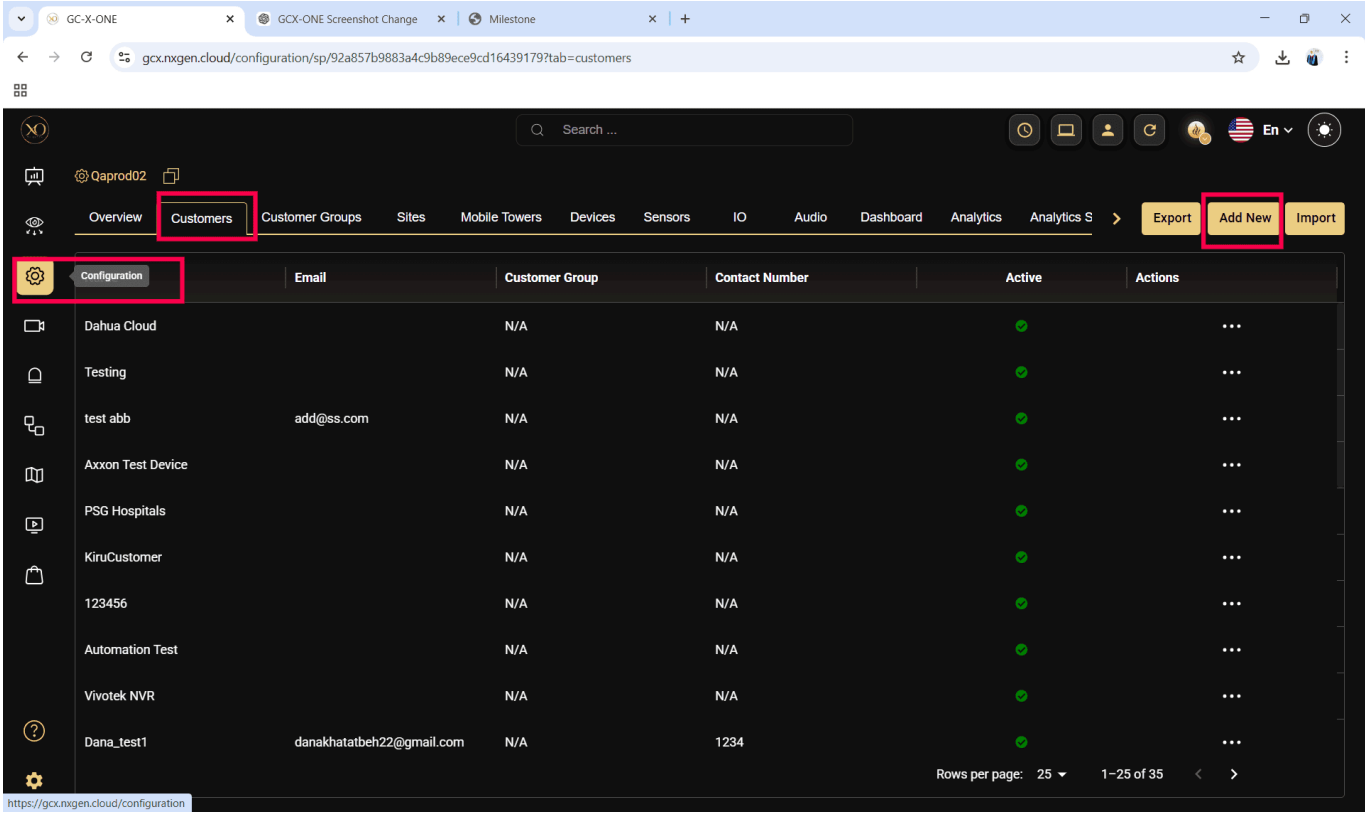

Step 5: Enter the required fields and click **Save**.

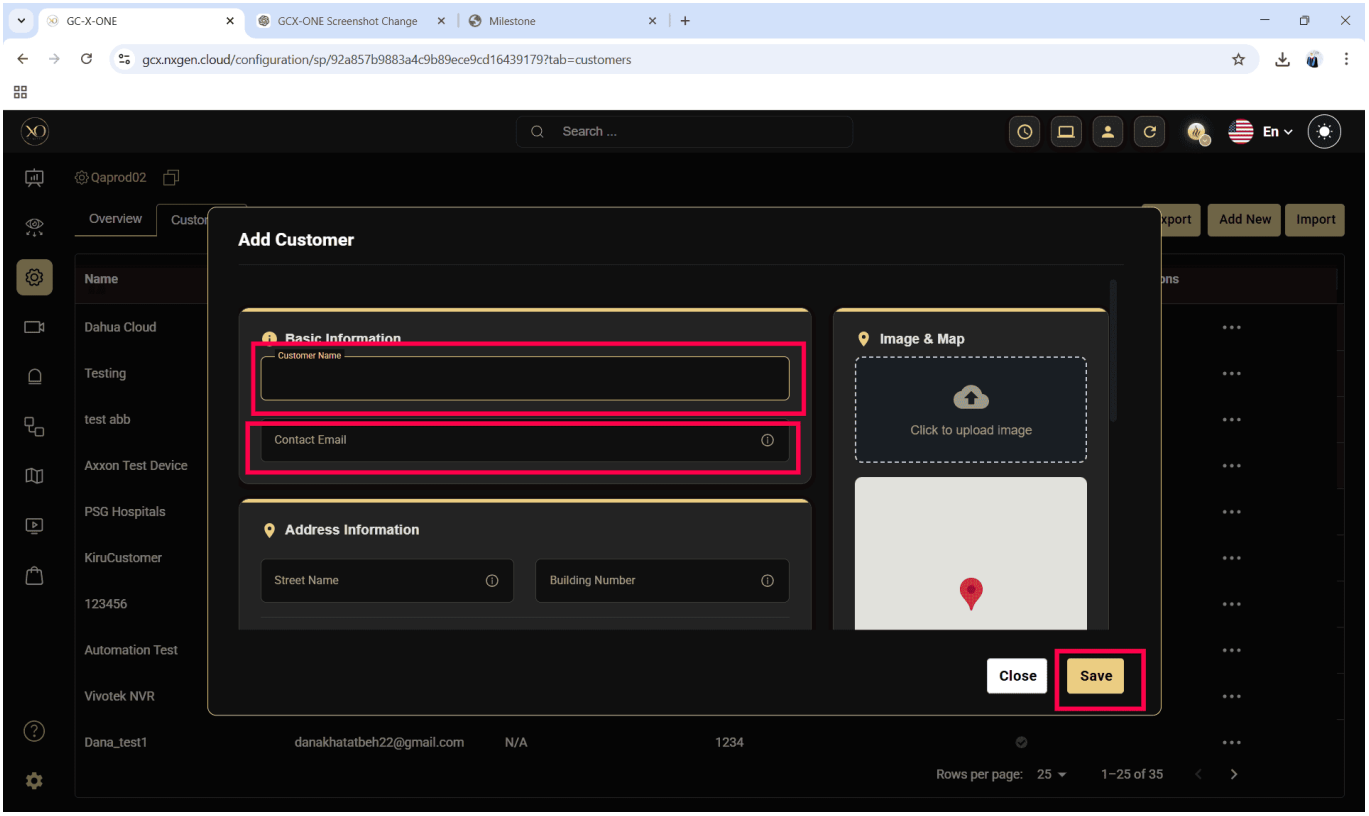

Step 6: Select the newly created customer.

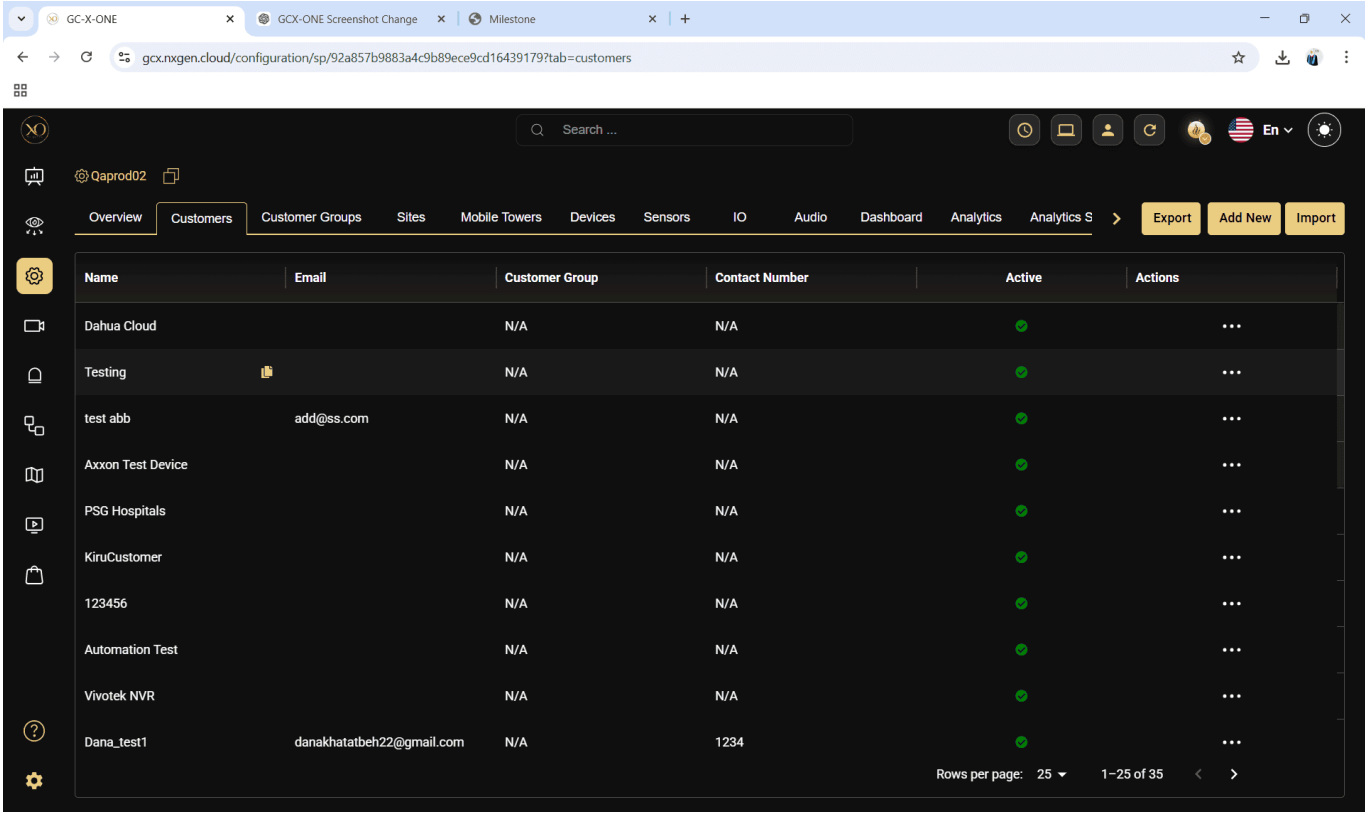

Step 7: Navigate to the **Sites** tab.

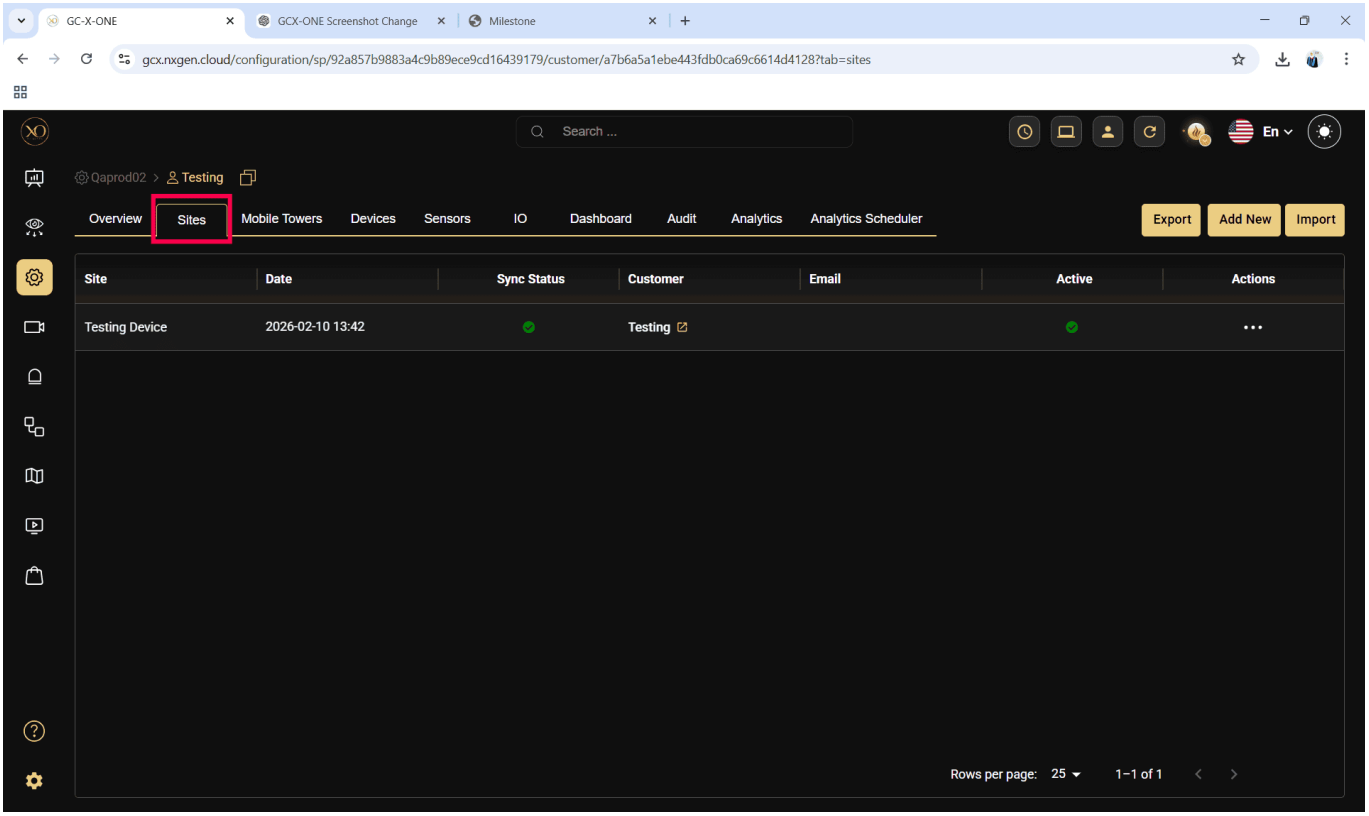

Step 8: Click the **Add** button.

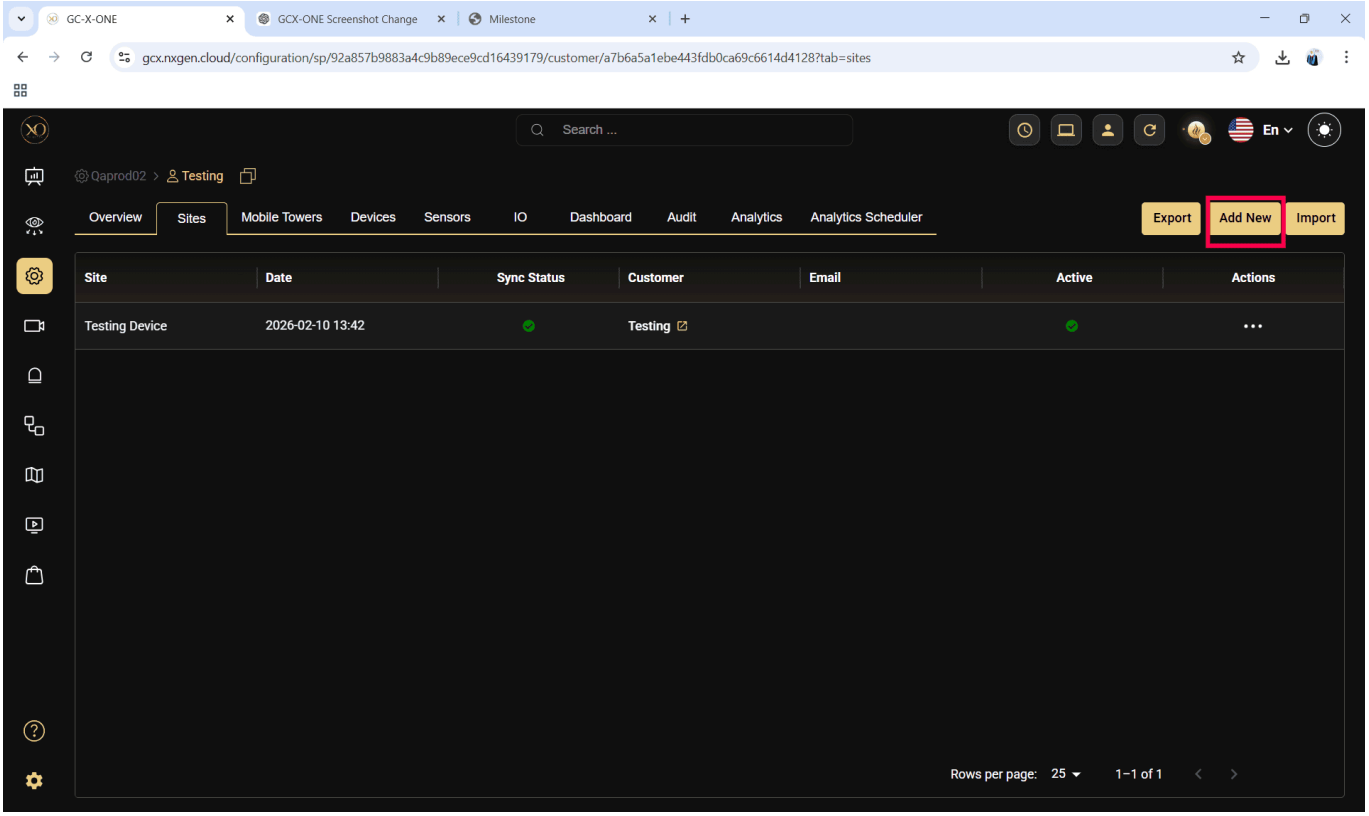

Step 9: Enter the required fields and click **Save**.

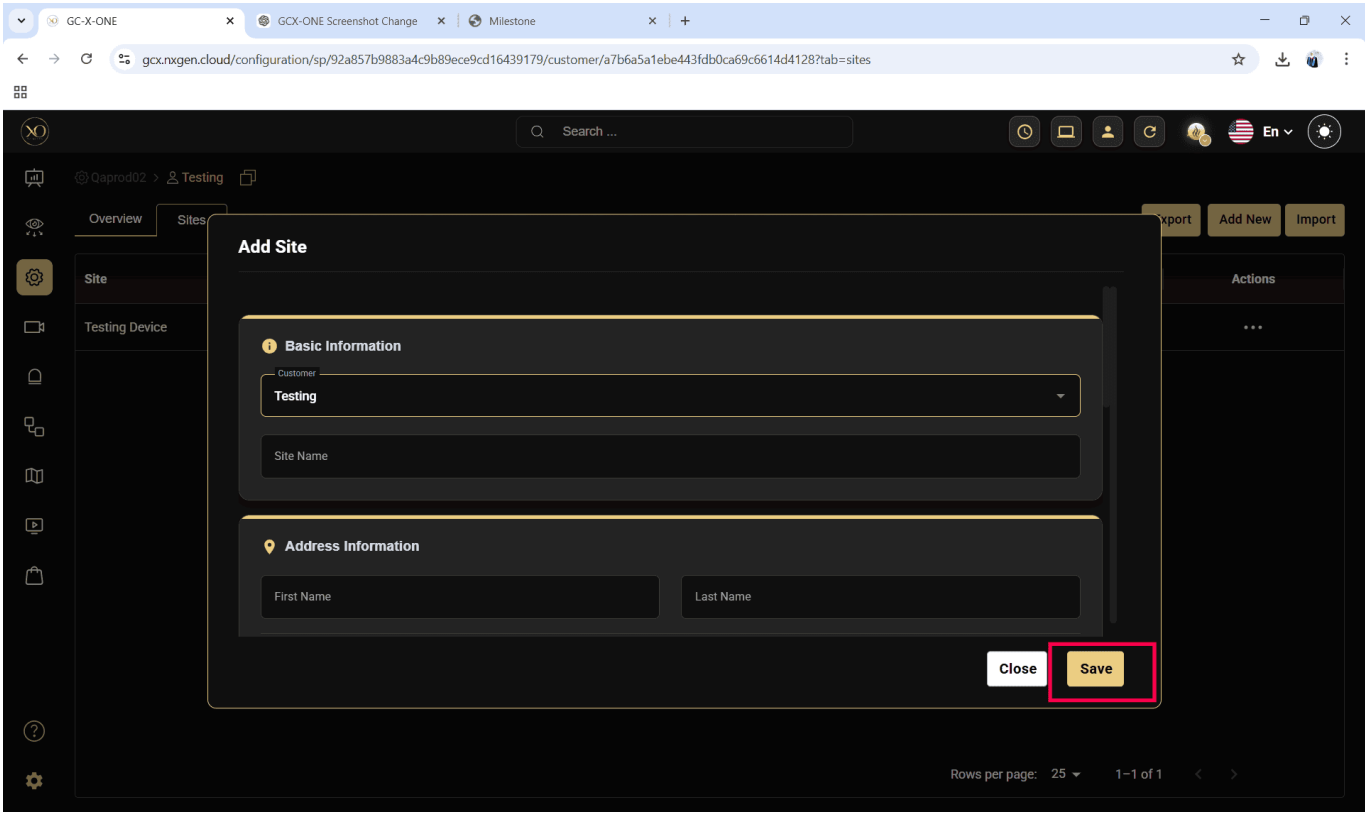

Step 10: Select the newly created site.

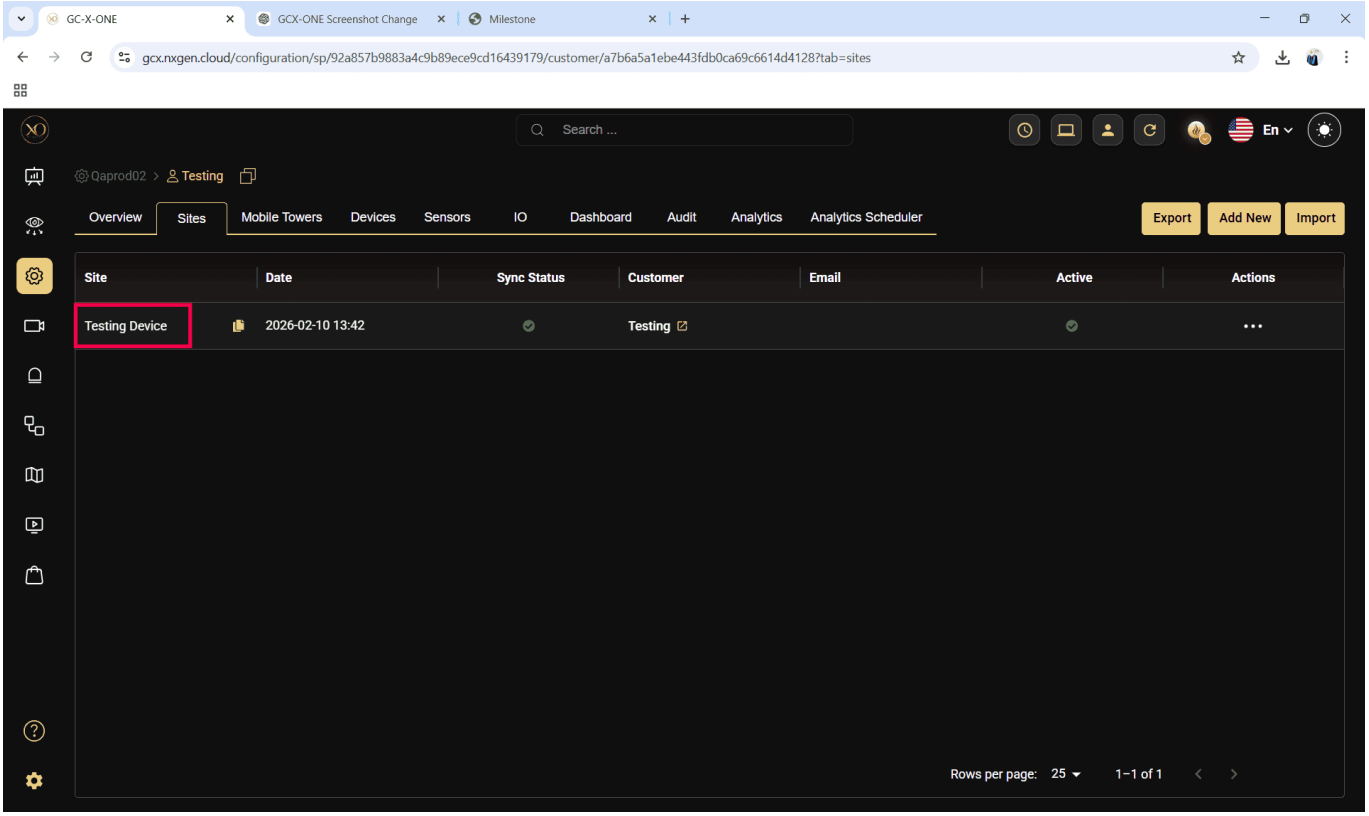

Step 11: Navigate to the **Devices** tab.

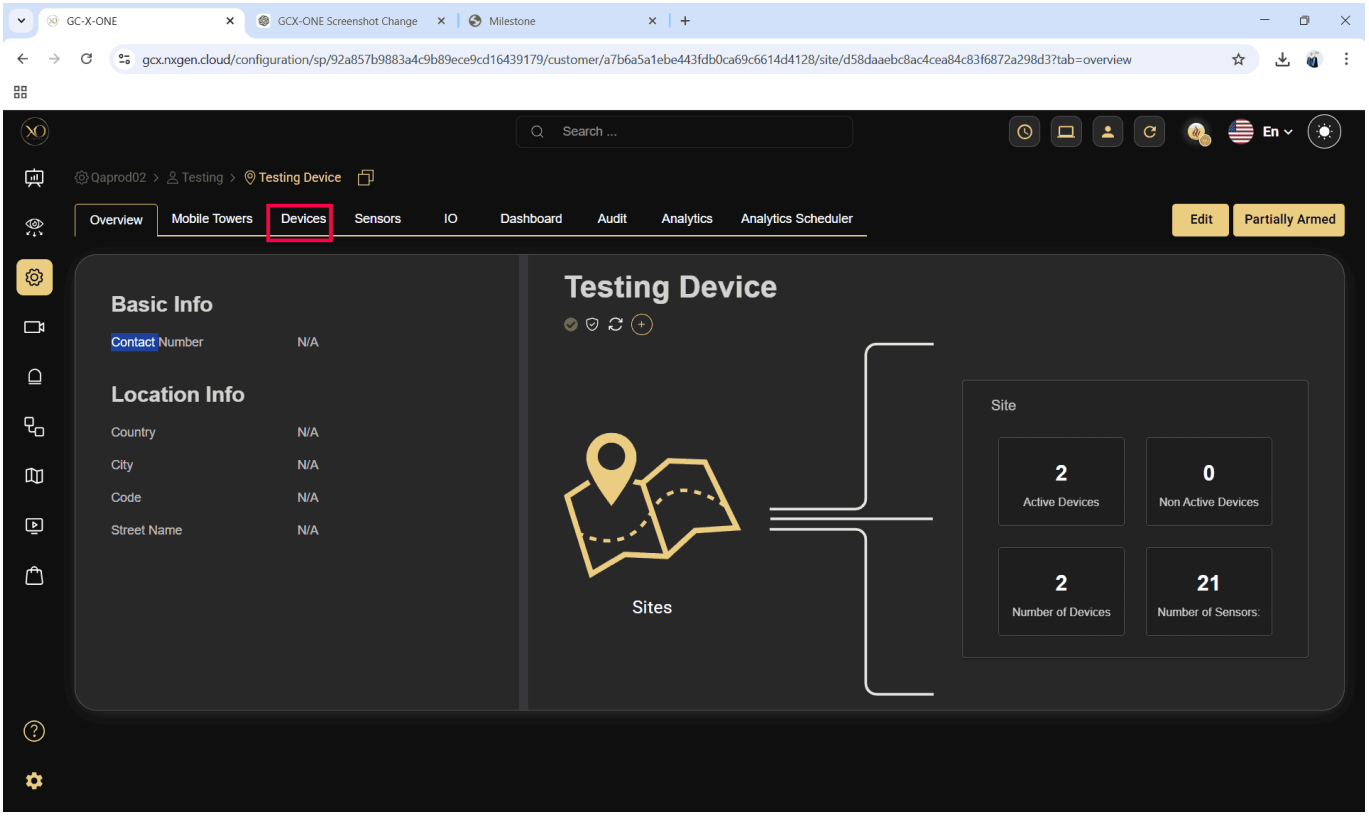

Step 12: Click the **Add** button.

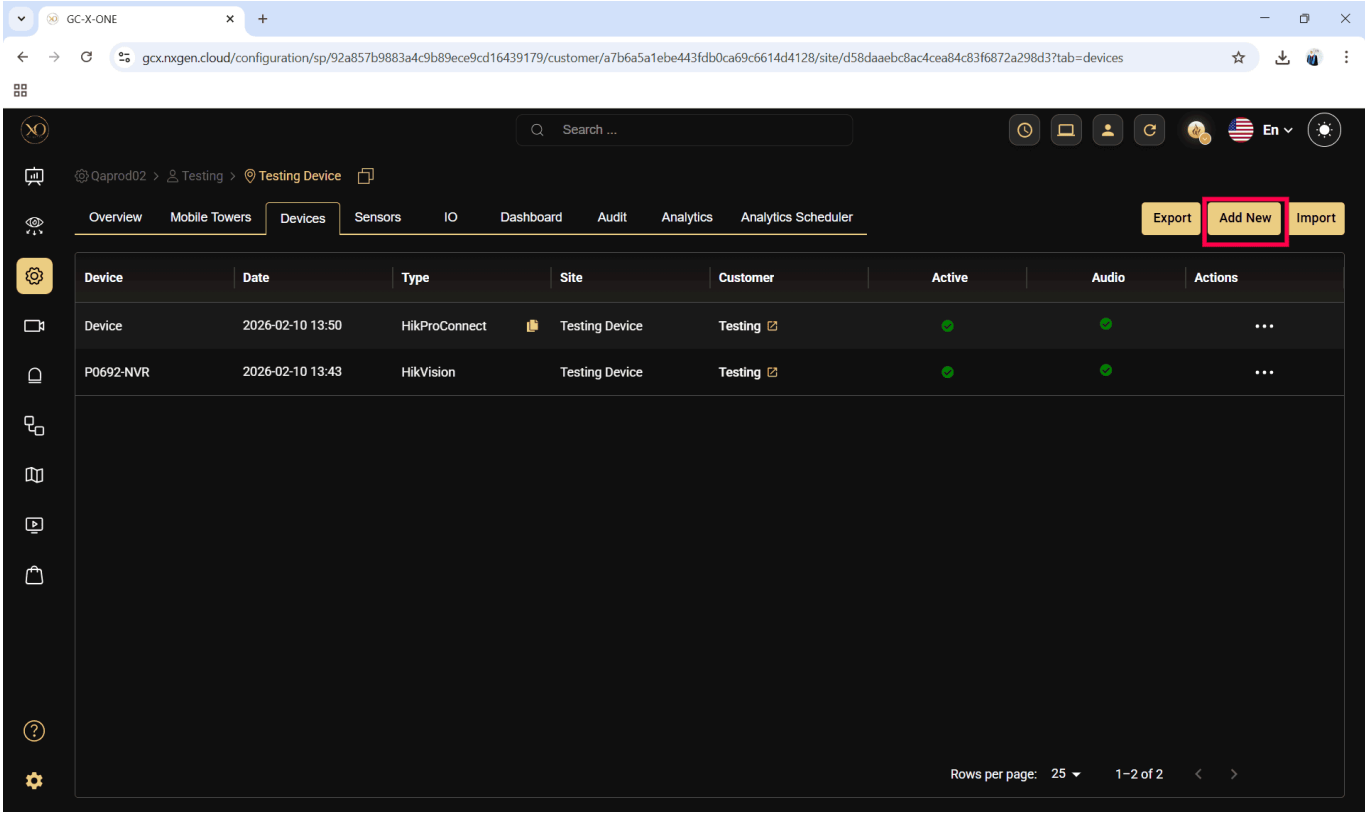

Step 13: The **Add Device** dialog will be displayed.

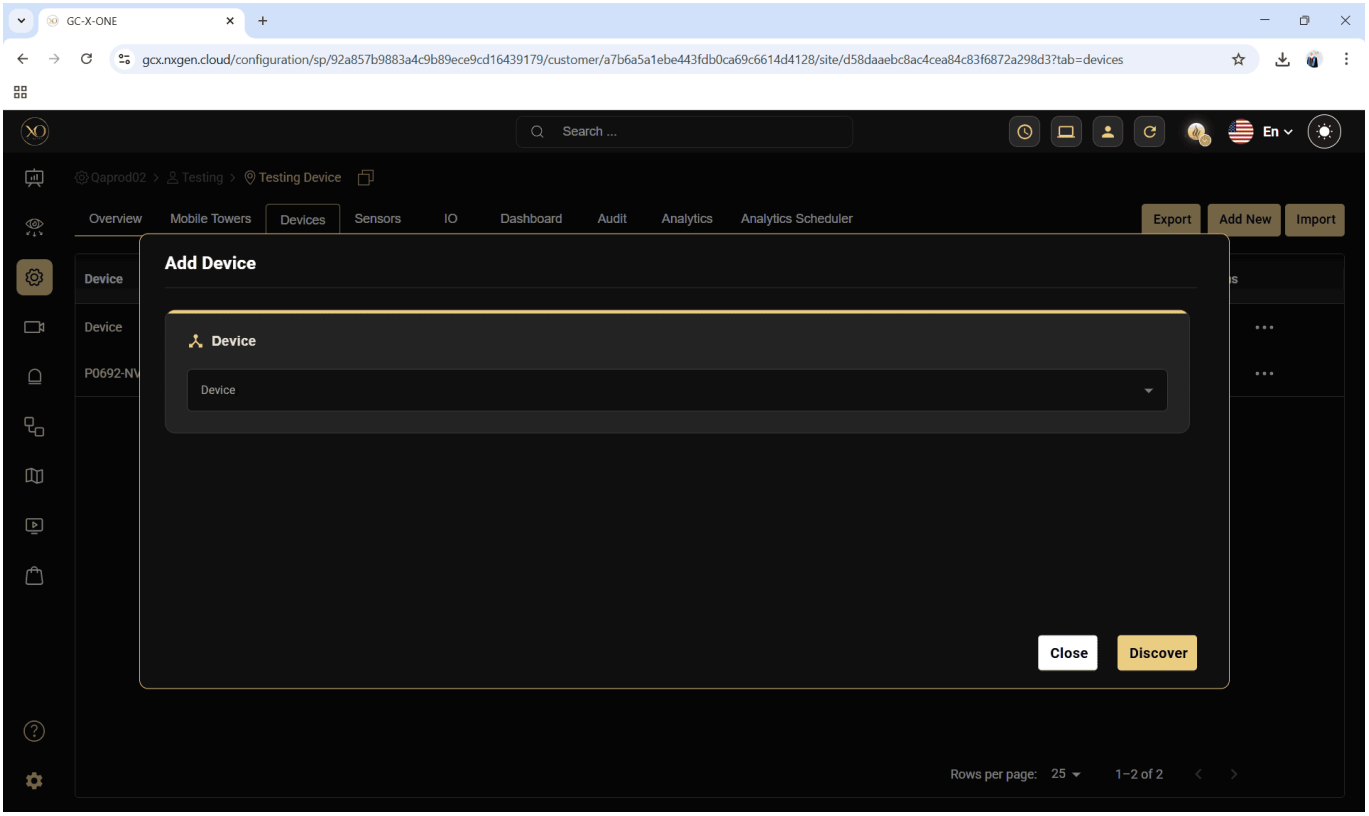

Step 14: In the dialog, open the **Device** dropdown and select **Eagle Eye**.

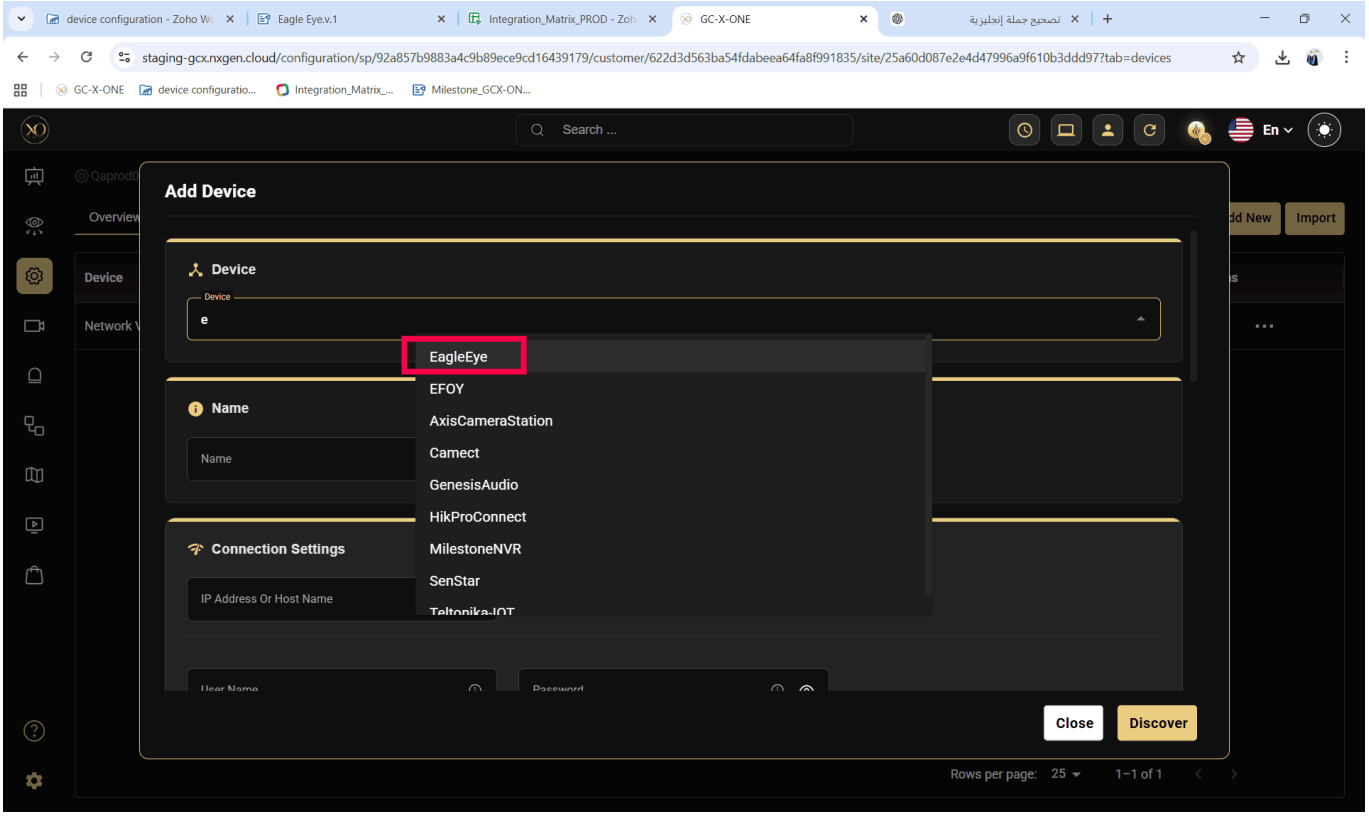

Step 15: Enter the required Eagle Eye identifiers

name

Serial No (ESN)

user name / password

Step 16: Click **Discover** to initiate device validation and cloud handshake with Eagle Eye

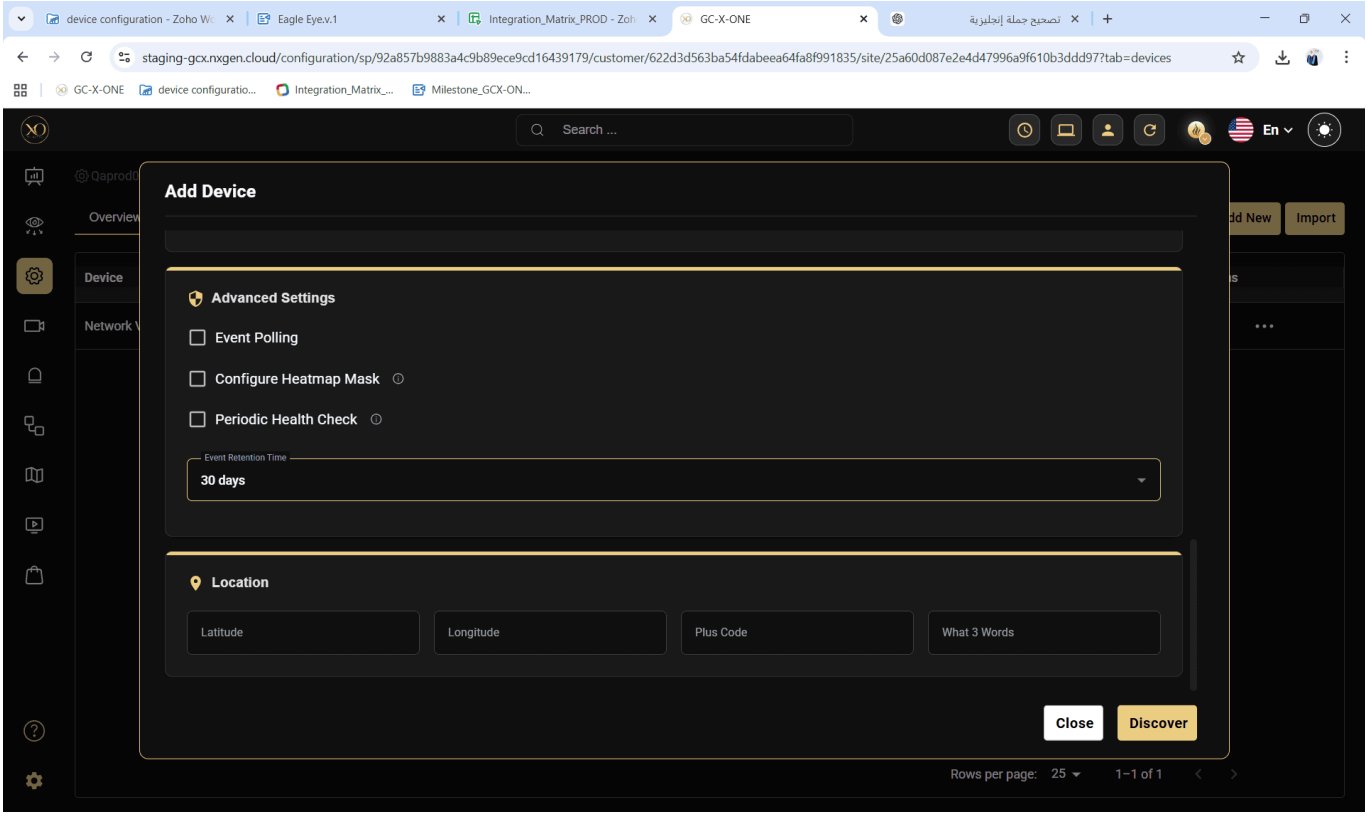

Step 17: Once the device is successfully discovered, click **Save**.

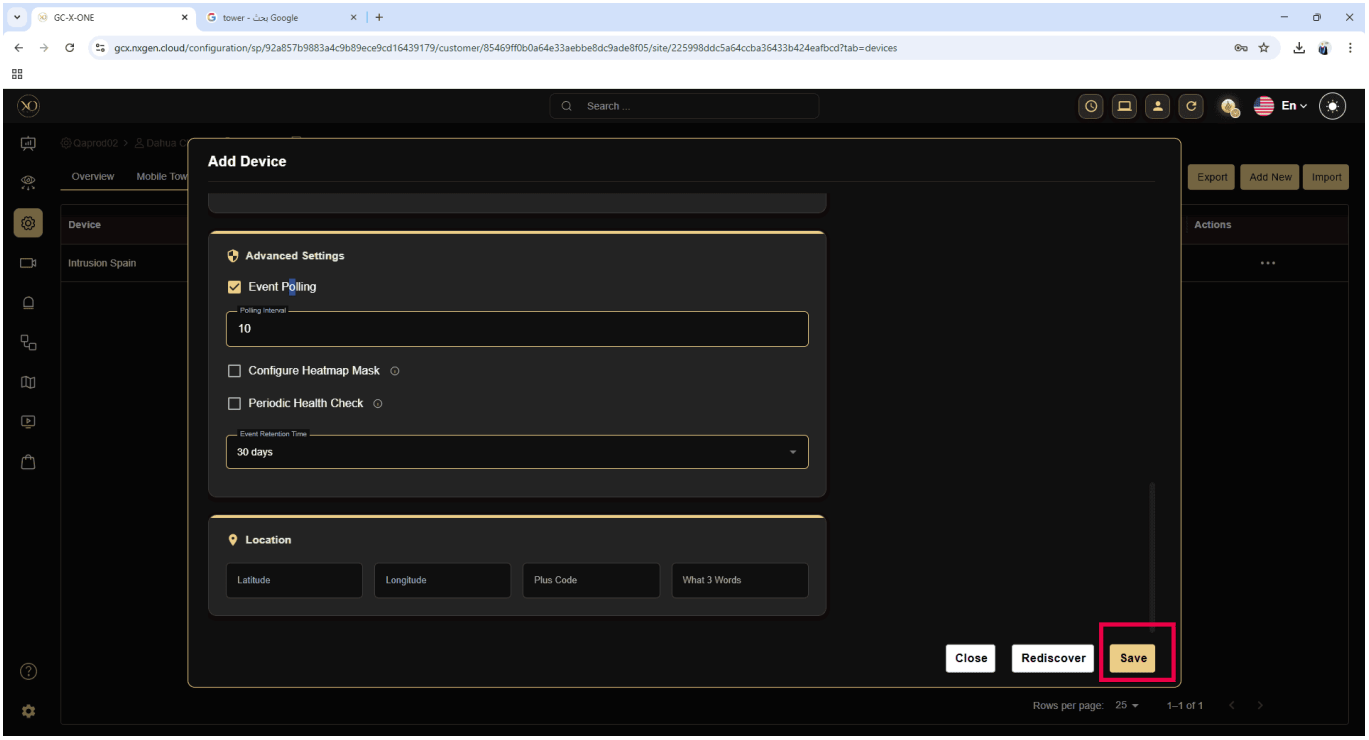

4. Post-Integration Validation

After successful onboarding, verify the following in GCX-ONE:

Device status is Online

Cameras are visible and correctly mapped

Live stream is accessible

Alarms are received properly (if the device is armed)

5. Common Integration Notes

ESN is incorrect or not cloud-registered

The Bridge is offline

firewall blocks outbound connectivity

Discovery may fail if:

One Eagle Eye Bridge can support multiple cameras; ensure bandwidth sizing aligns with camera resolution and frame rate.

Camera naming consistency between Eagle Eye and GCX-ONE is recommended for operational clarity.

6. Support and Troubleshooting

If discovery or onboarding fails:

Revalidate ESN and GUID in Eagle Eye Cloud

Confirm WAN connectivity from the bridge

Verify GCX-ONE user permissions

Contact platform support and provide the bridge identifiers and site details