Hanwha Device

Hanwha Device Configuration Guide with GCX-ONE

Step 1: Navigate to the **Devices** tab.

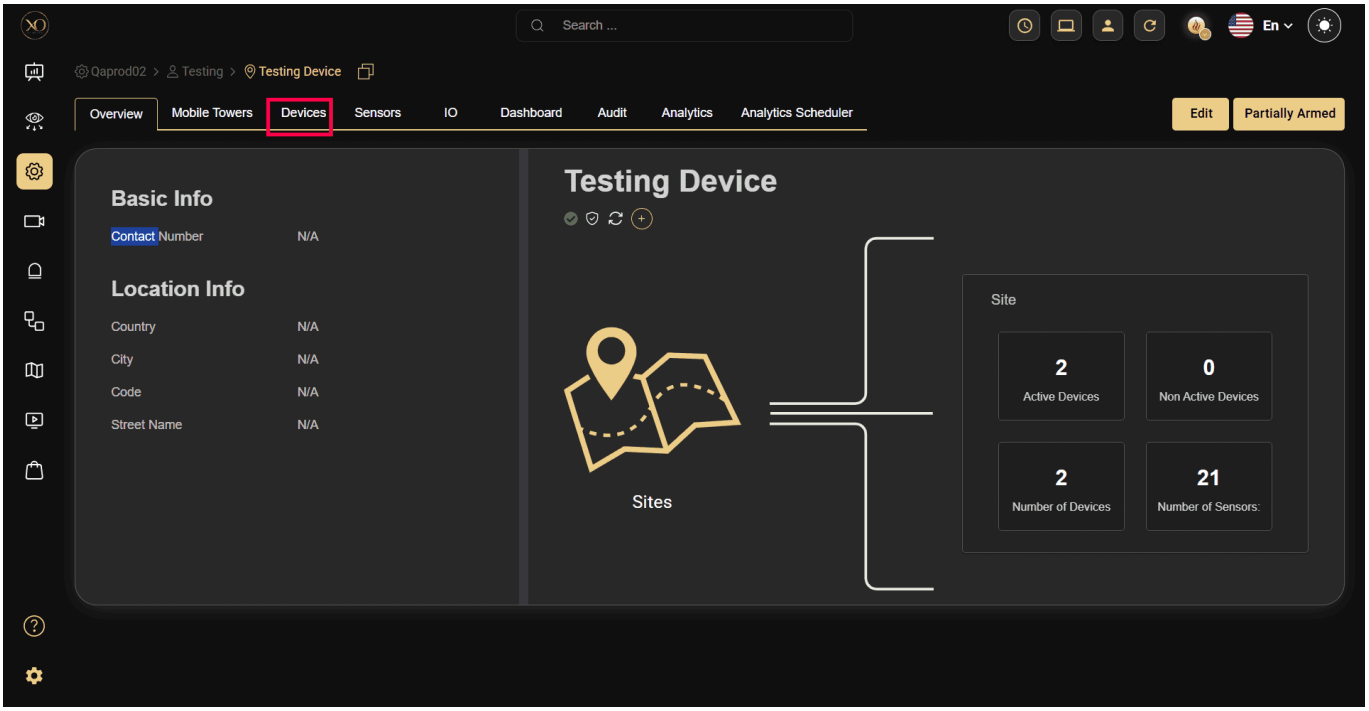

Step 2: Click the **Add** button.

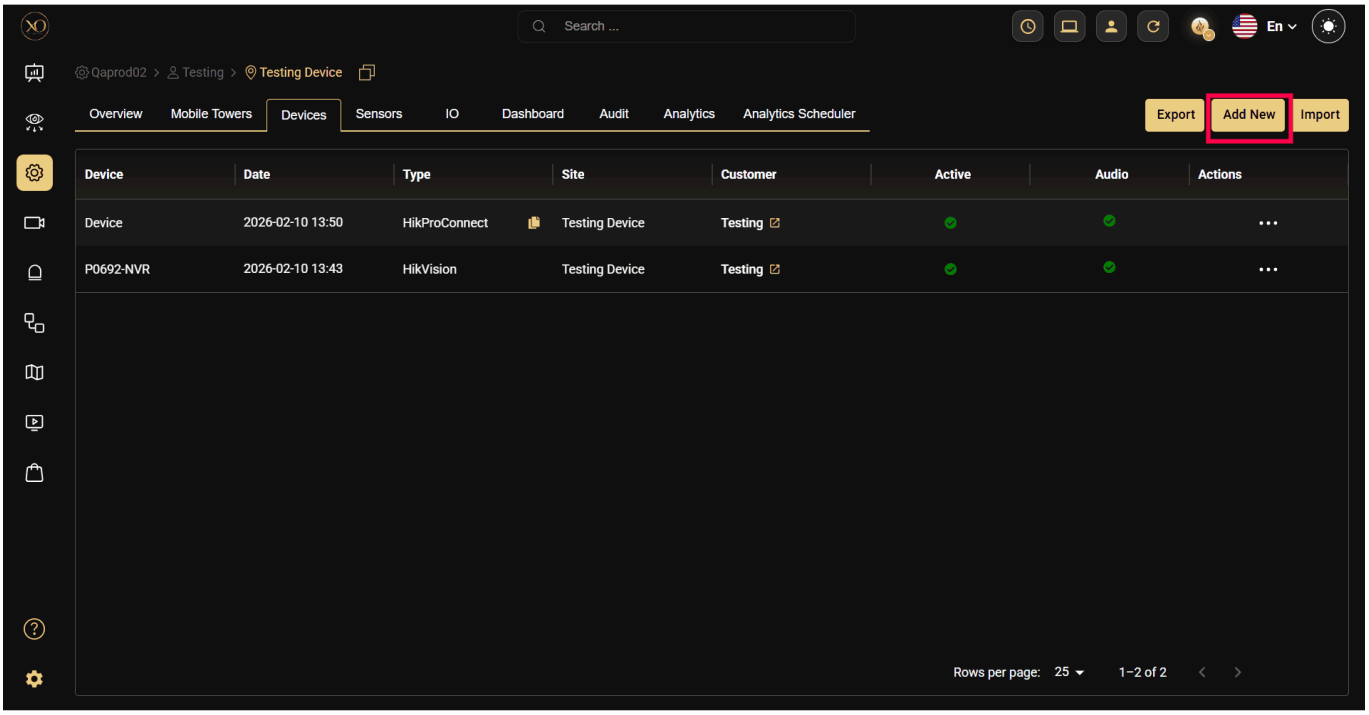

Step 3: The **Add Device** dialog will be displayed.

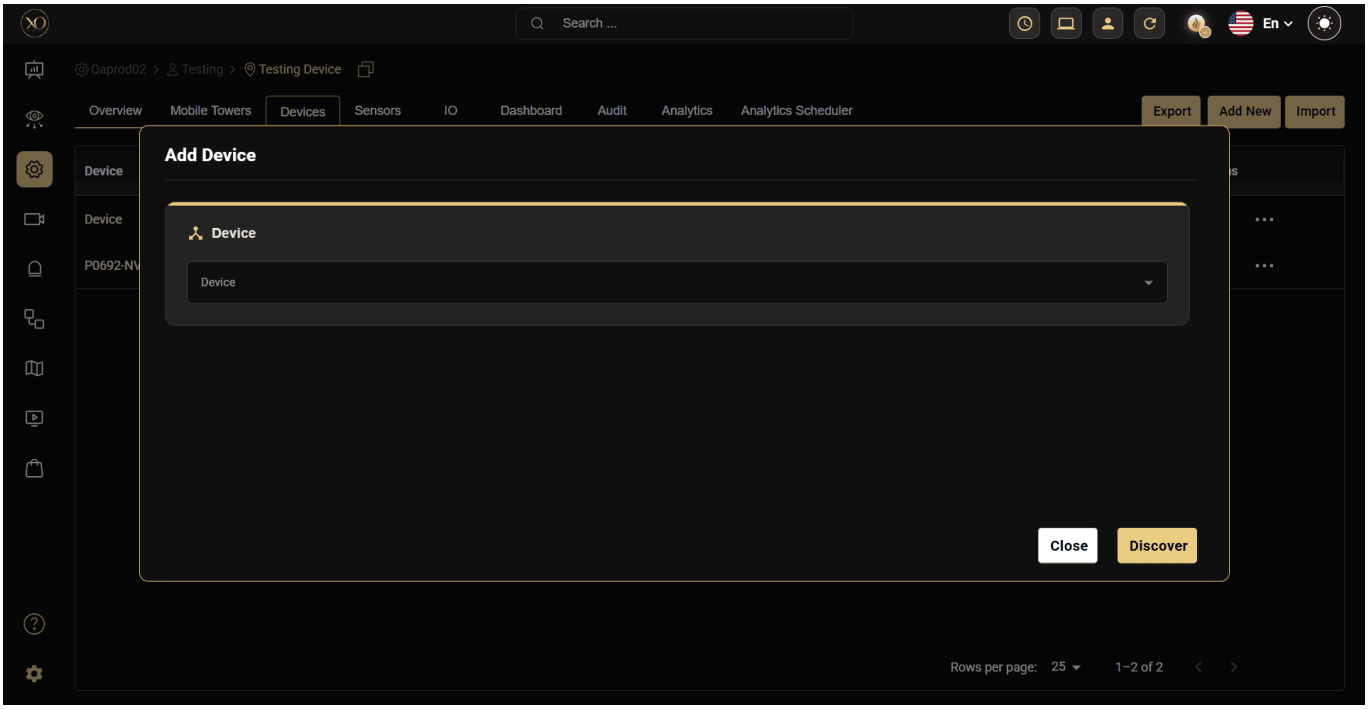

Step 4: In the dialog, open the **Device** dropdown and select **Hanwha**.

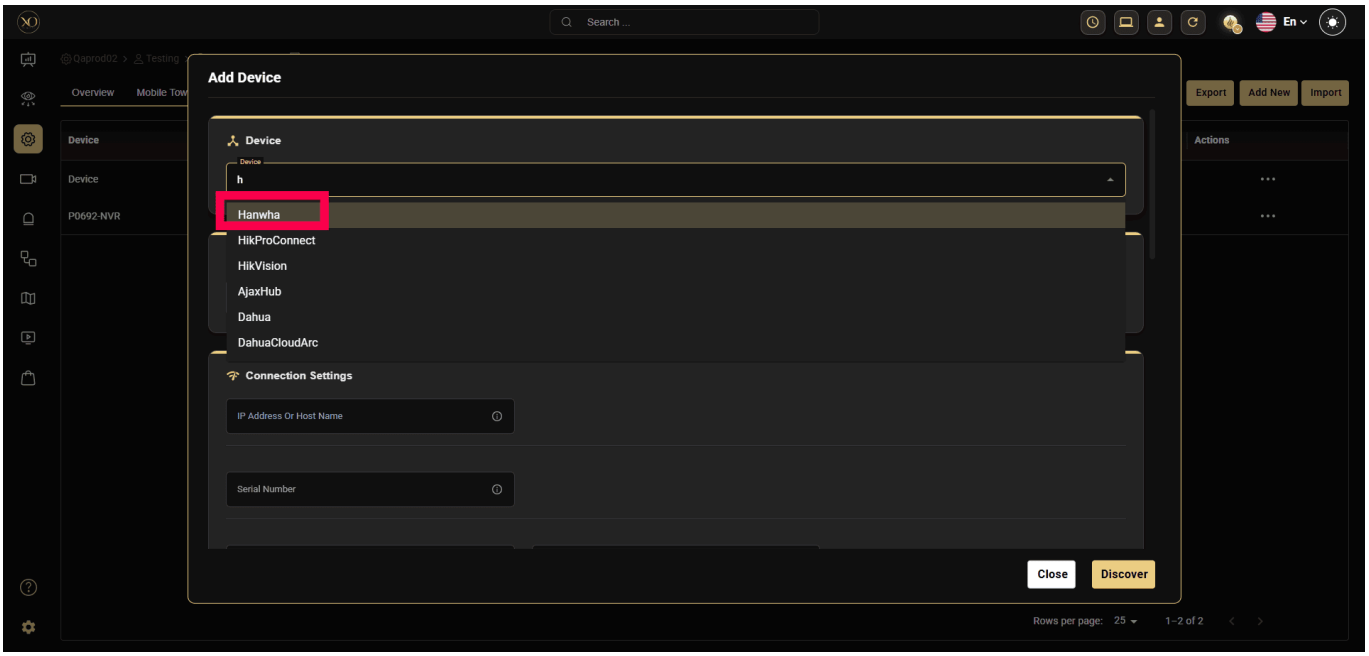

Step 5: Enter all required fields:

IP Address or Host

Username

Password

RTSP Port

HTTPS Port

Note: The **HTTPS Port** field is mandatory when adding a Hanwha device.

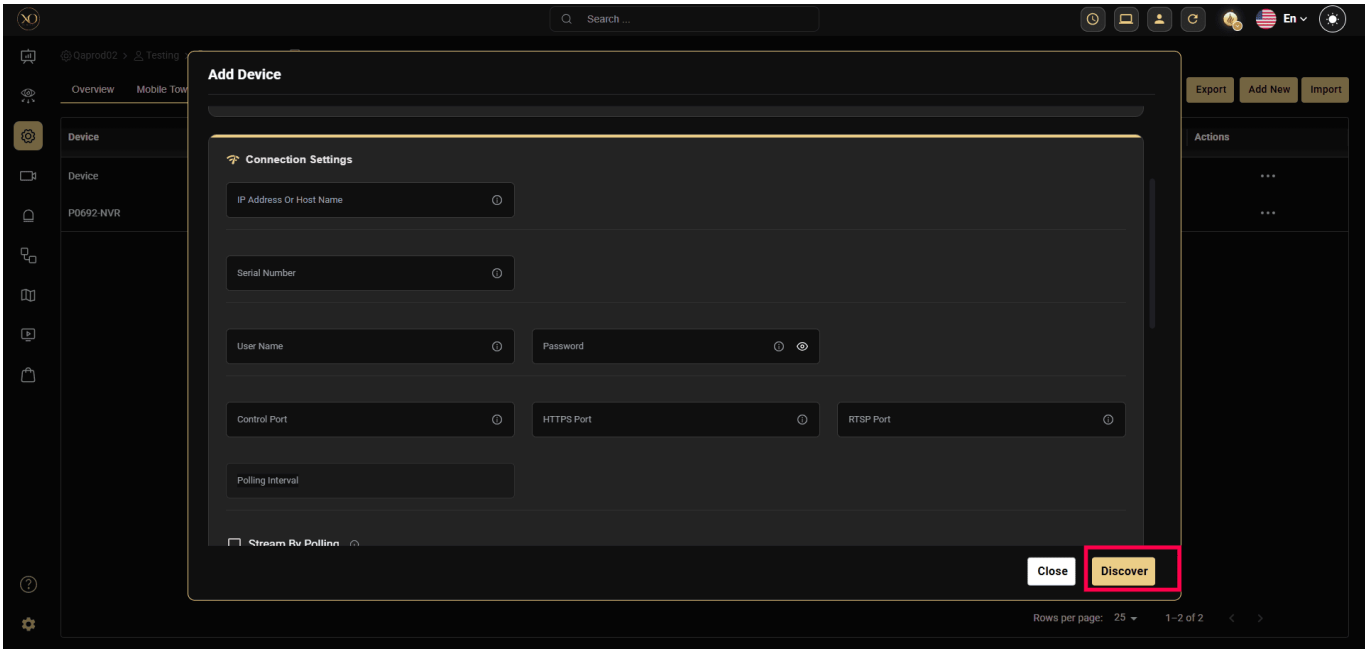

Step 6: Click Discover.

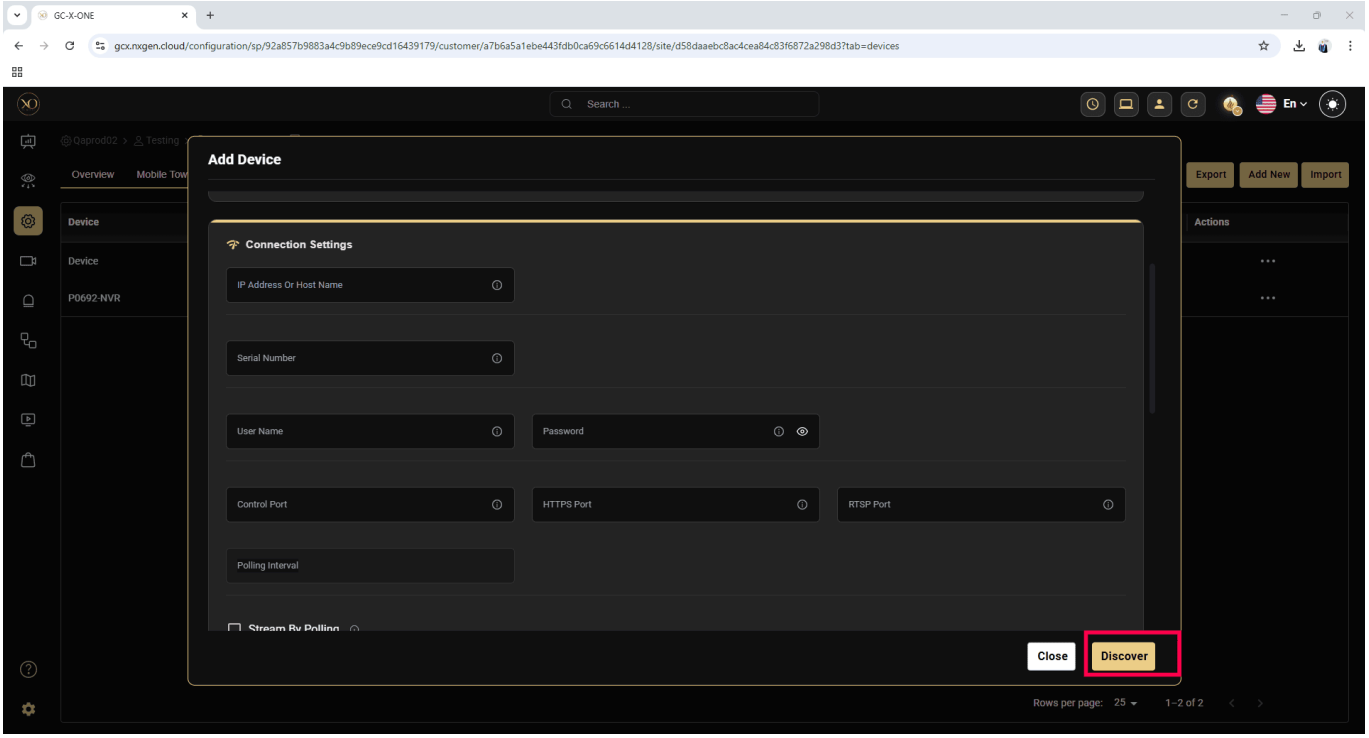

Step 7: Once the device is successfully discovered, click **Save**.

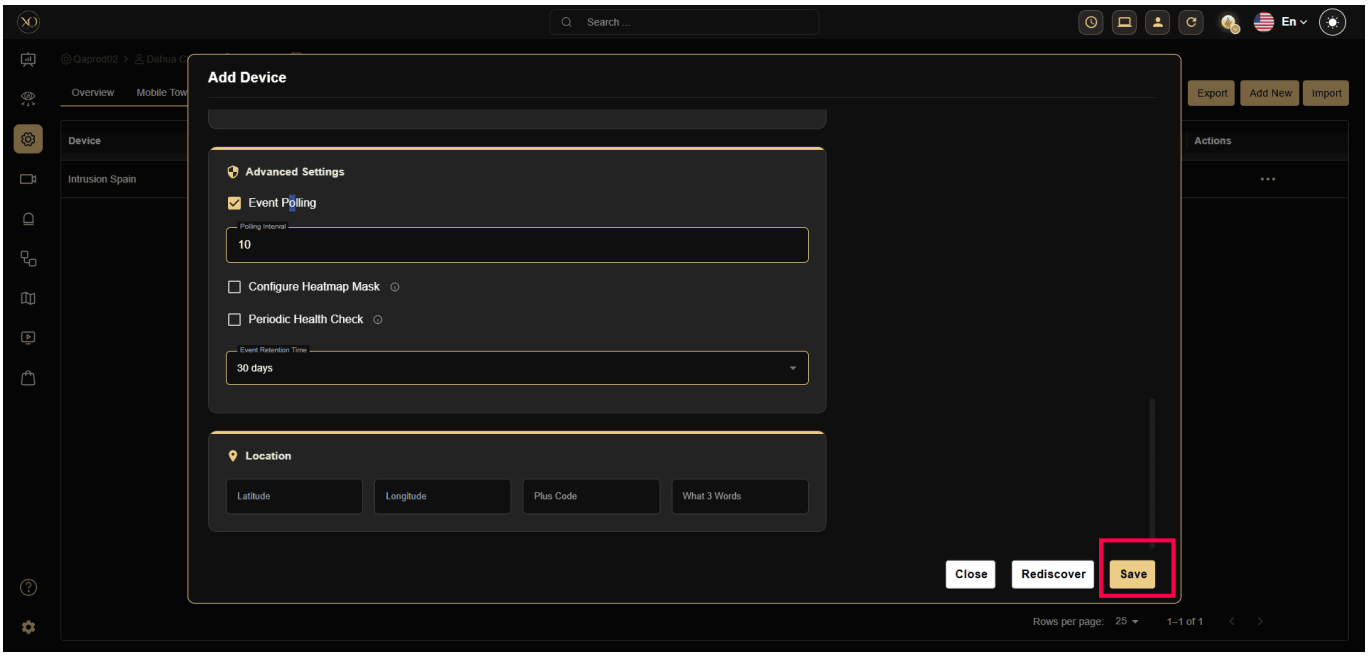

Webhook Configuration for Hanwha Device

This section describes how to verify webhook configuration for event routing in Hanwha devices.

Step 1: Log in to the **Hanwha device web client**.

Step 2: Select the required **Sensor** from the sidebar.

Step 3: Right-click the sensor and select **Camera Changes**.

Step 4: From the event rule list, click **Do HTTPS Request**.

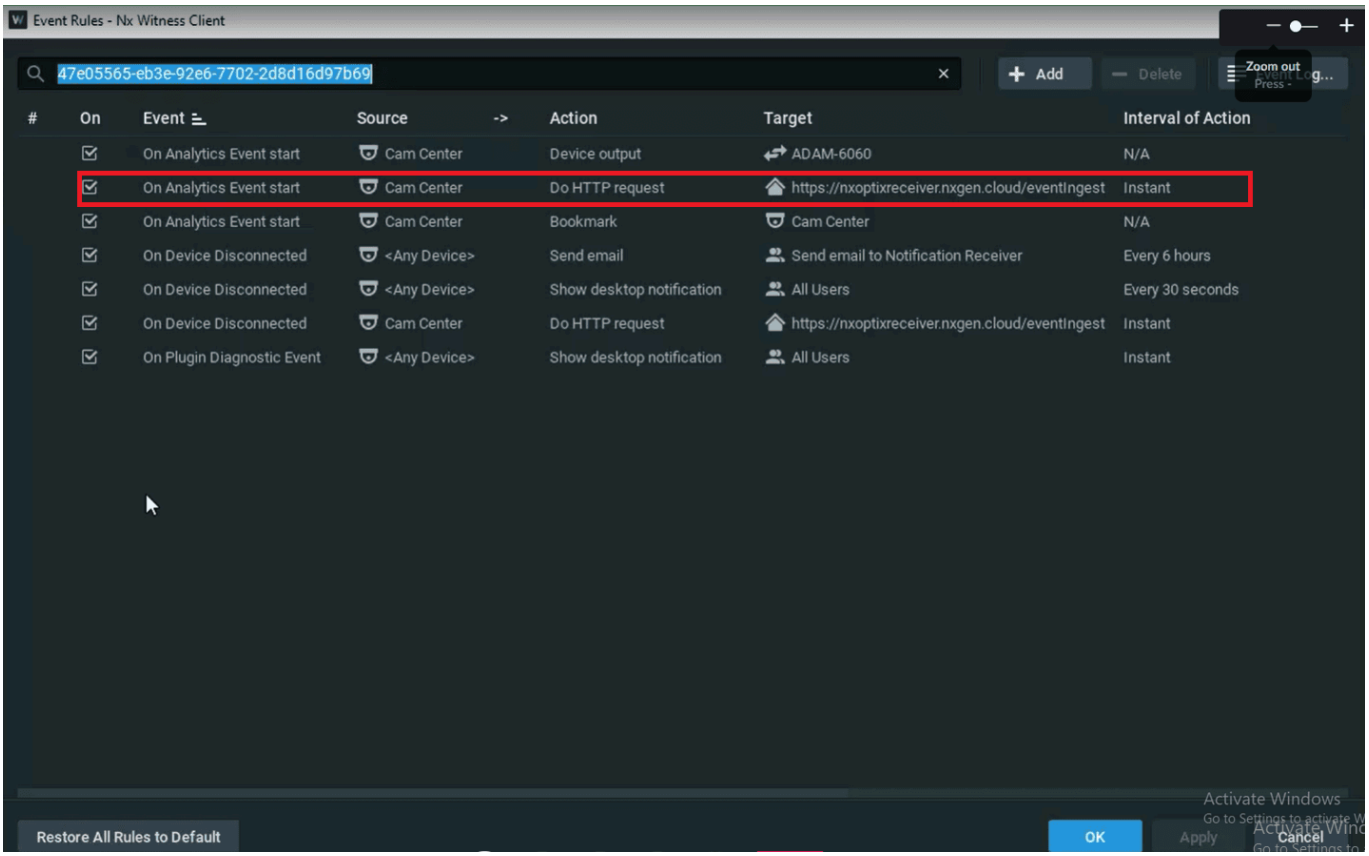

#	On	Event	Source	->	Action	Target	Interval of Action
	☑	On Analytics Event start	Cam Center		Device output	ADAM-6060	N/A
	☑	On Analytics Event start	Cam Center		Do HTTP request	https://nxoptixreceiver.nxgen.cloud/eventIngest	Instant
	☑	On Analytics Event start	Cam Center		Bookmark	Cam Center	N/A
	☑	On Device Disconnected	<Any Device>		Send email	Send email to Notification Receiver	Every 6 hours
	☑	On Device Disconnected	<Any Device>		Show desktop notification	All Users	Every 30 seconds
	☑	On Device Disconnected	Cam Center		Do HTTP request	https://nxoptixreceiver.nxgen.cloud/eventIngest	Instant
	☑	On Plugin Diagnostic Event	<Any Device>		Show desktop notification	All Users	Instant
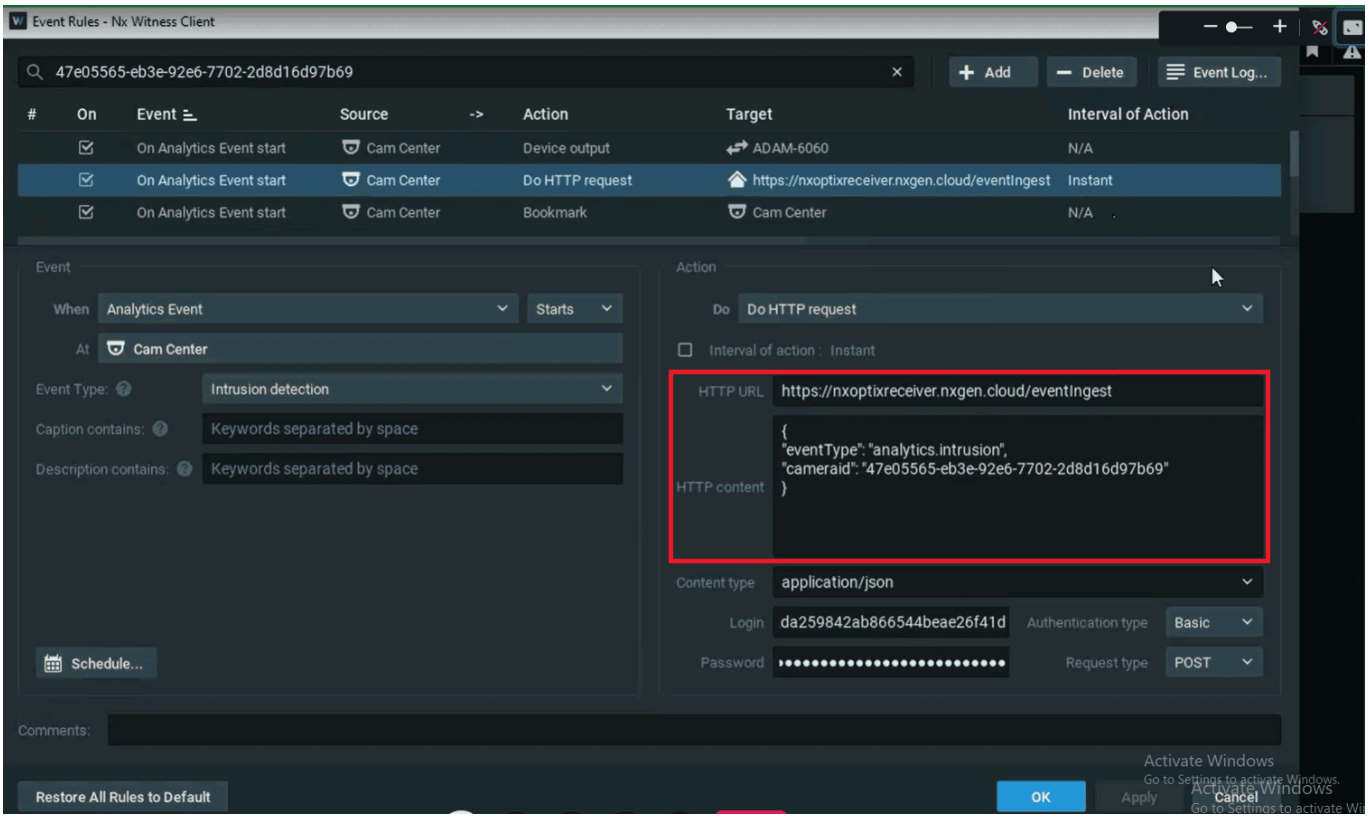
Step 5: Verify the configured **HTTP URL** and **HTTP Content**.