50-ohm noise: fixed calibration discrepancies

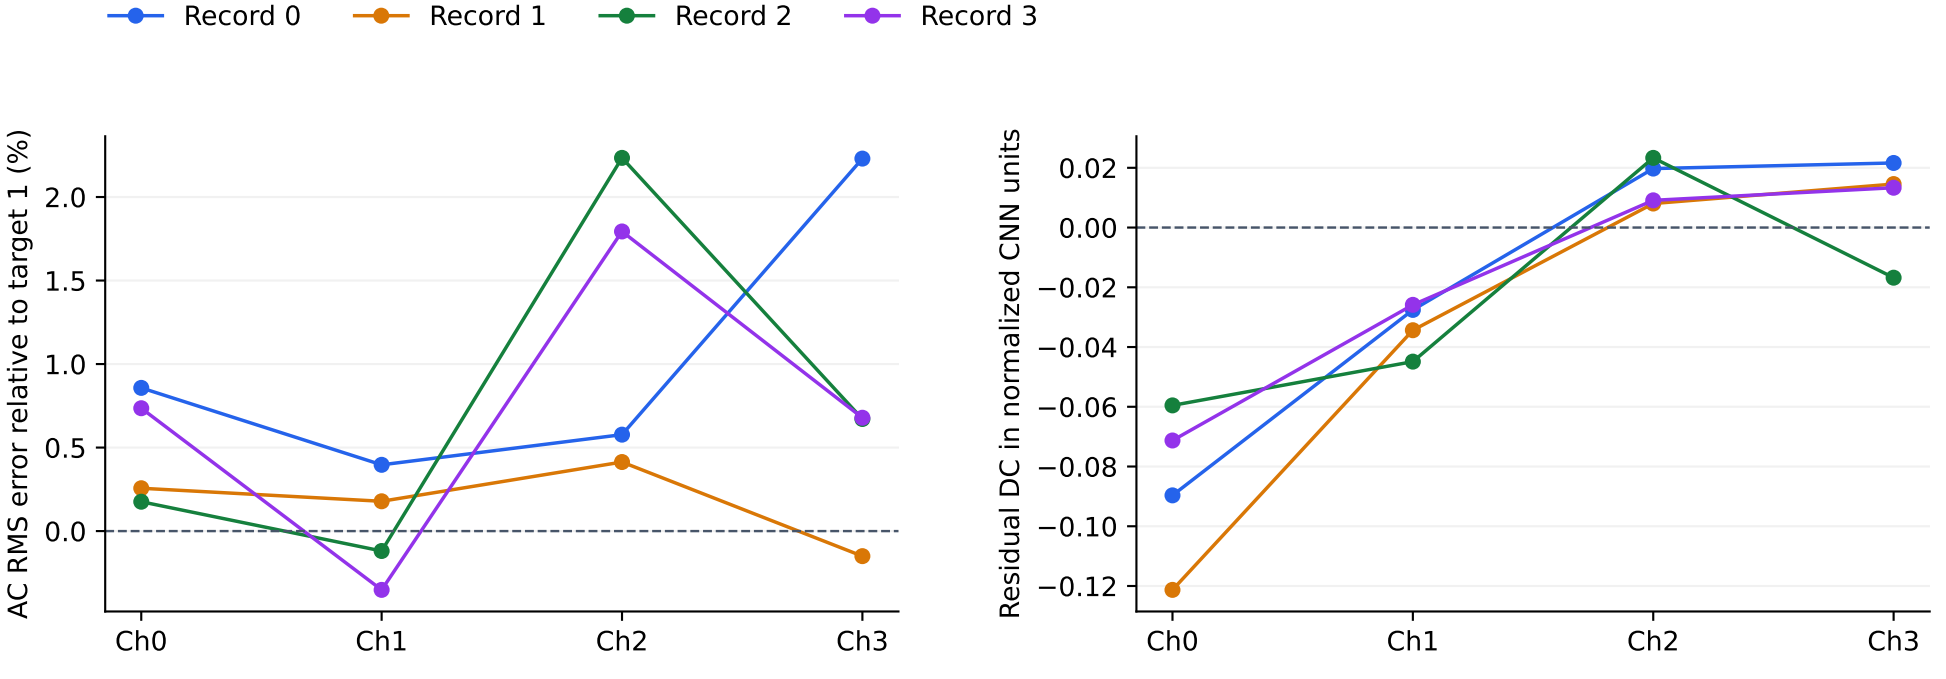

Exact native input rounding included. Target mean = 0; target AC RMS = 1. Calibration constants unchanged.