


A. One row is one update; the output address selects the next row

Address x	Input x0 ... x9	Output y0 ... y9	Next address F(x)	Cycle index
65	1000001000	0100010101	674	transient
321	1000001010	0100010101	674	G1, phase 0
674	0100010101	1010001010	325	G1, phase 1
325	1010001010	0101010101	682	G1, phase 2
682	0101010101	1010101010	341	G1, phase 3
341	1010101010	0101000101	650	G1, phase 4
650	0101000101	0010101010	340	G1, phase 5
340	0010101010	0000010101	672	G1, phase 6
672	0000010101	1000001010	321	G1, phase 7

B. Follow the actual eight-step cycle

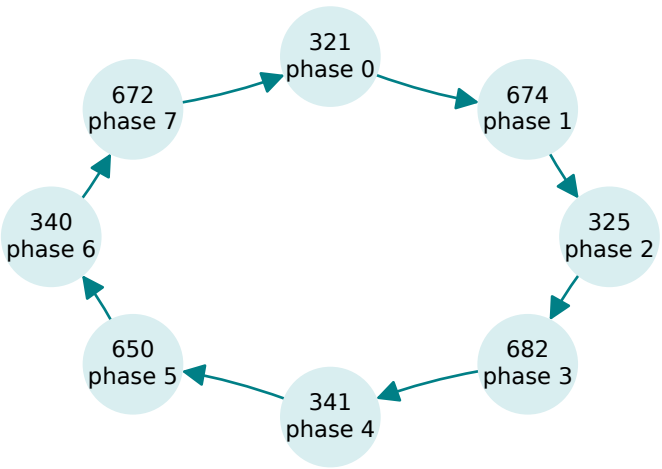

C. Divide cycle mass among its phases

