

SKI-ALP sensorized boot with rotation and load sensors


Rotation Sensors:

LEG-SHELL ANGLE

SHELL-SKI ANGLE

SHELL-CUFF ANGLE

Used for detecting movement and loads during both ascent and descent.

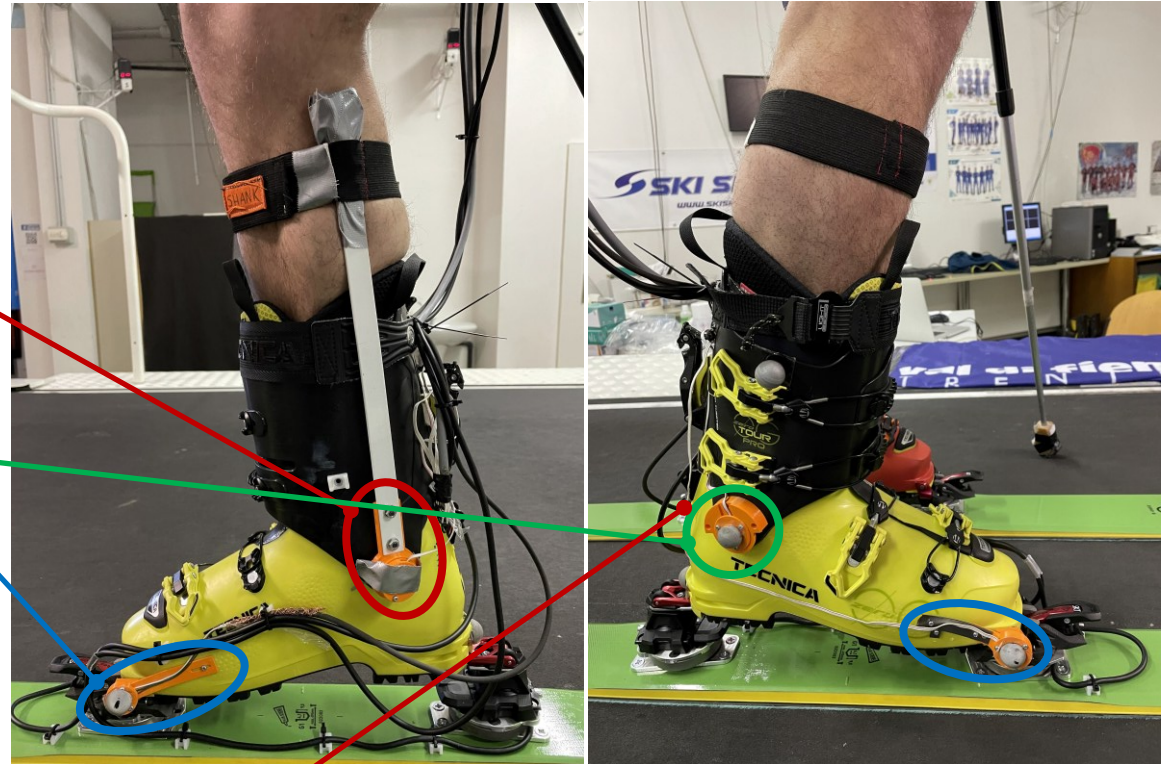

Load Sensors: measure the load at the rear LINK, responsible for the FLEX INDEX, and at the binding connections.



UNIVERSITÀ
DEGLI STUDI
DI PADOVA



[Zullo G. et al., 2022]

