


FICHA TÉCNICA

Tira de LED flexible de 5m CRI80 3W/m
15W 24V

2813()71

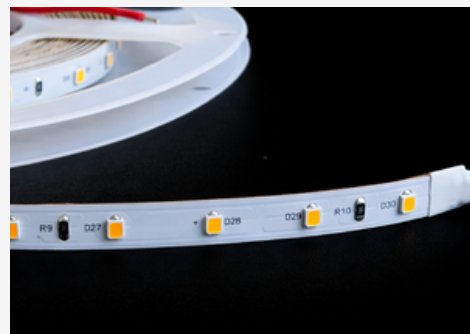

CARACTERÍSTICAS

Tipo	PVC, flexible, 2835, Chip 80 Led/m , EPISTAR
CRI y protección	CRI80, IP20 Y IP65
Voltaje:	24V
Potencia:	3W/m - 15W/5m
Temperatura:	Ta: -20° a 40° // Tc: 60°
Ángulos	120°
Vida útil	50.000h
Garantía	3 Años

ESPECIFICACIONES TÉCNICAS

IP20

- 2813(2027)71:** Tira Led 2700k, 2175Lm
- 2813(2030)71:** Tira Led 3000k, 2250Lm
- 2813(2040)71:** Tira Led 4000k, 2400Lm
- 2813(2060)71:** Tira Led 6500k, 2400Lm


IP65

- 2813(6527)71:** Tira Led 2700k, 2175Lm
- 2813(6530)71:** Tira Led 3000k, 2250Lm
- 2813(6540)71:** Tira Led 4000k, 2400Lm
- 2813(6560)71:** Tira Led 6500k, 2400Lm


DIMENSIONES

Rollo: 5 metros

IP20

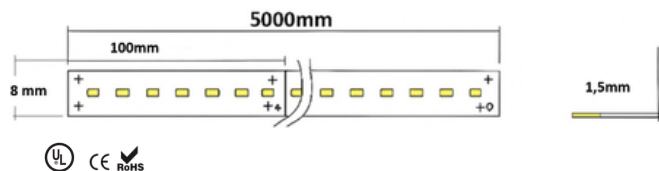

IP65

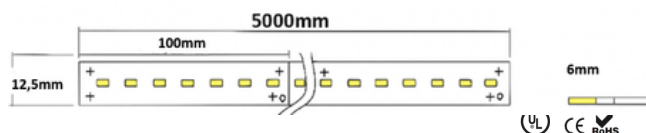

APLICACIONES

Aplicación	Beneficio
Retail & escaparates	Resalta producto e incentiva compra
Iluminación indirecta arquitectónica	Luz continua y uniforme
Exteriores techados	Protección IP65 y durabilidad

