

FICHA TÉCNICA

Tira de LED flexible de 5m CRI80 22W/m
110W 24V

28122()71



CARACTERÍSTICAS

Tipo	PVC, flexible, 2835, Chip 240Leds/m EDISON
CRI y protección	CRI80, IP20 Y IP65
Voltaje:	24V
Potencia:	22W/m - 110W/5m
Temperatura	Ta: -20° a 40° // Tc: 60°
Ángulos	120°
Vida útil	30000 Horas
Garantía	3 Años

ESPECIFICACIONES TÉCNICAS

IP20



- 28122(2022)71:** Tira Led 2200k, 11000Lm
- 28122(2032)71:** Tira Led 2600-3200k, 11400Lm
- 28122(2040)71:** Tira Led 4000-4200k, 11700Lm
- 28122(2060)71:** Tira Led 6000-6500k, 12000Lm

IP65

- 28122(6522)71:** Tira Led 2200k, 11000Lm
- 28122(6532)71:** Tira Led 2600-3200k, 11400Lm
- 28122(6540)71:** Tira Led 4000-4200k, 11700Lm
- 28122(6560)71:** Tira Led 6000-6500k, 12000Lm

DIMENSIONES

Rollo: 5 metros

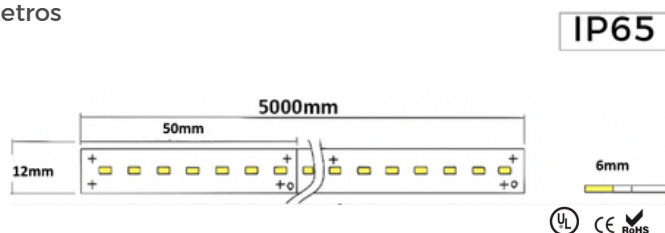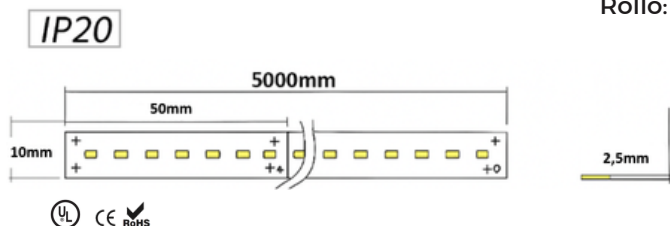

APLICACIONES

Aplicación	Beneficio
Mercados, oficinas y armarios	Decoración de esquinas y contornos
Festivales, eventos y espectáculos	Iluminación decorativa
Edificios y construcciones	Para iluminación decorativa exterior e interior

