

FICHA TÉCNICA

Tira de LED flexible de 5m CRI90 8W/m
40W 24V

2918()71



CARACTERÍSTICAS


Tipo	PVC, flexible, 2835, chip 98Leds/m EDISON
CRI y protección	CRI90, IP20
Voltaje:	24V
Potencia:	8W/m- 40W/5m
Temperatura	Ta: -20° a 40° // Tc: 60°
Ángulos	120°
Vida útil	30000 Horas
Garantía	3 Años

ESPECIFICACIONES TÉCNICAS

IP20

-  **2918(2022)71:** Tira Led 2200-2400k, 3820Lm
-  **2918(2032)71:** Tira Led 2600-2800k, 4120Lm
-  **2918(2040)71:** Tira Led 4000-4200k, 4631Lm
-  **2918(2060)71:** Tira Led 6000-6500k, 4453Lm

DIMENSIONES

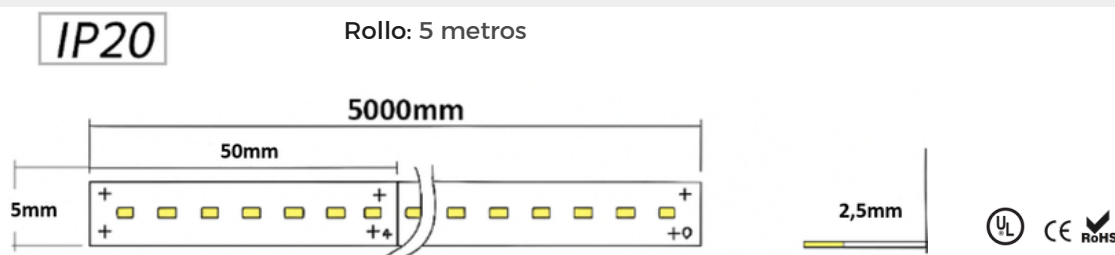

APLICACIONES

Aplicación	Beneficio
Iluminación directa e indirecta	Soluciones versátiles que equilibran funcionalidad y estética.
Señalización	Iluminación precisa y uniforme para máxima visibilidad e impacto visual.
Publicidad	Resalta marcas y mensajes

