

# FICHA TÉCNICA

Tira de LED flexible de 5m CRI90 17.2W/m  
86W 24V

29117( )71



## CARACTERÍSTICAS

|                  |                                            |
|------------------|--------------------------------------------|
| Tipo             | PVC, flexible, 2835, chip 168Leds/m EDISON |
| CRI y protección | CRI90, IP20 Y IP65                         |
| Voltaje:         | 24V                                        |
| Potencia:        | 17.2W/m- 86W/5m                            |
| Temperatura      | Ta: -20° a 40° // Tc: 60°                  |
| Ángulos          | 120°                                       |
| Vida útil        | 30000 Horas                                |
| Garantía         | 3 Años                                     |

## ESPECIFICACIONES TÉCNICAS

### IP20

-  **29117(2022)71:** Tira Led 2200k, 11570Lm
-  **29117(2032)71:** Tira Led 2600-2800k, 11630Lm
-  **29117(2040)71:** Tira Led 4000-4200k, 11690Lm
-  **29117(2060)71:** Tira Led 6000-6500k, 11750Lm


### IP65

-  **29117(6522)71:** Tira Led 2200k, 11570Lm
-  **29117(6532)71:** Tira Led 2600-2800k, 11630Lm
-  **29117(6540)71:** Tira Led 4000-4200k, 11690Lm
-  **29117(6560)71:** Tira Led 6000-6500k, 11750Lm


## DIMENSIONES

Rollo: 5 metros

### IP20

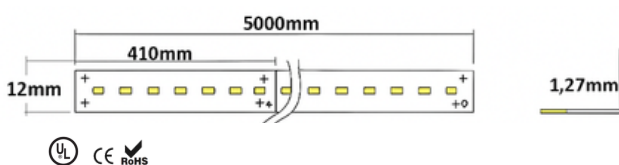

### IP65

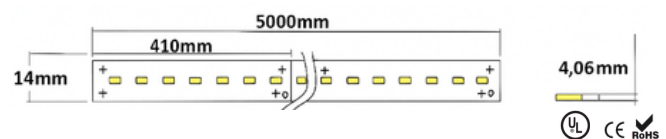

## APLICACIONES

| Aplicación                      | Descripción                                            |
|---------------------------------|--------------------------------------------------------|
| Iluminación directa e indirecta | Equilibrio entre funcionalidad y estética              |
| Señalización                    | Iluminación precisa y uniforme para alta visibilidad   |
| Publicidad                      | Resalta marcas y mensajes con máxima eficiencia visual |

