


FICHA TÉCNICA

Tira de LED flexible de 5m CRI90
20W/m 100W 24V

29120()71

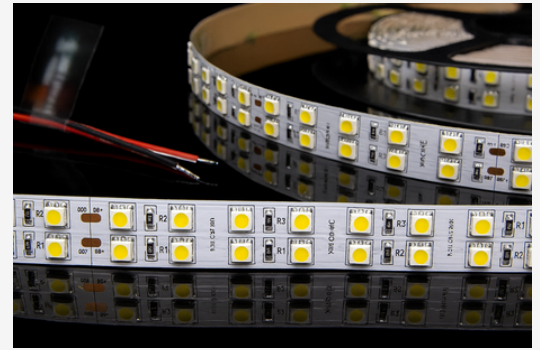

CARACTERÍSTICAS

Tipo	PVC, flexible, 2835, chip 196Leds/m EDISON
CRI y protección	CRI90, IP20 Y IP65
Voltaje:	24V
Potencia:	20W/m- 100W/5m
Temperatura	Ta: -20° a 40° // Tc: 60°
Ángulos	120°
Vida útil	30000 Horas
Garantía	3 Años

ESPECIFICACIONES TÉCNICAS

IP20



-  **29120(2032)71:** Tira Led 2600-3200k, 13380Lm
-  **29120(2040)71:** Tira Led 4000-4200k, 13440Lm
-  **29120(2060)71:** Tira Led 6000-6500k, 13500Lm

IP65

-  **29120(6532)71:** Tira Led 2600-3200k, 13380Lm
-  **29120(6540)71:** Tira Led 4000-4200k, 13440Lm
-  **29120(6560)71:** Tira Led 6000-6500k, 13500Lm

DIMENSIONES

Rollo: 5 metros

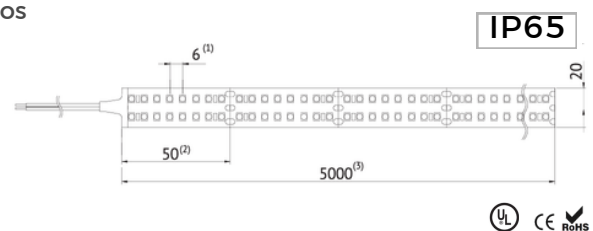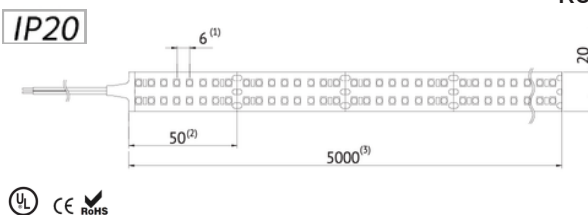

APLICACIONES

Aplicación	Beneficio
Iluminación directa e indirecta	Soluciones versátiles que equilibran funcionalidad y estética.
Señalización	Iluminación precisa y uniforme para máxima visibilidad e impacto visual.
Publicidad	Resalta marcas y mensajes

