



Mark Scheme (Results)

January 2021

Pearson Edexcel International Advanced Subsidiary
In Physics (WPH13)
Paper 1 Practical Skills in Physics I

Edexcel and BTEC Qualifications

Edexcel and BTEC qualifications are awarded by Pearson, the UK's largest awarding body. We provide a wide range of qualifications including academic, vocational, occupational and specific programmes for employers. For further information visit our qualifications websites at www.edexcel.com or www.btec.co.uk. Alternatively, you can get in touch with us using the details on our contact us page at www.edexcel.com/contactus.

Pearson: helping people progress, everywhere

Pearson aspires to be the world's leading learning company. Our aim is to help everyone progress in their lives through education. We believe in every kind of learning, for all kinds of people, wherever they are in the world. We've been involved in education for over 150 years, and by working across 70 countries, in 100 languages, we have built an international reputation for our commitment to high standards and raising achievement through innovation in education. Find out more about how we can help you and your students at: www.pearson.com/uk

January 2021

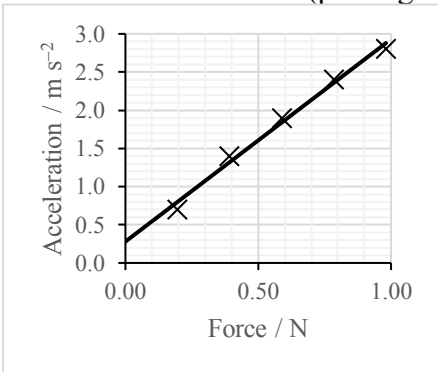
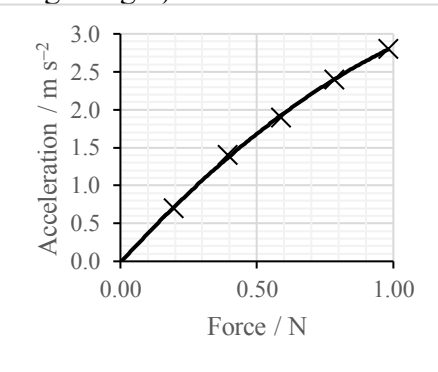
Publications Code WPH13_01_2101_MS

All the material in this publication is copyright

© Pearson Education Ltd 2021

General Marking Guidance

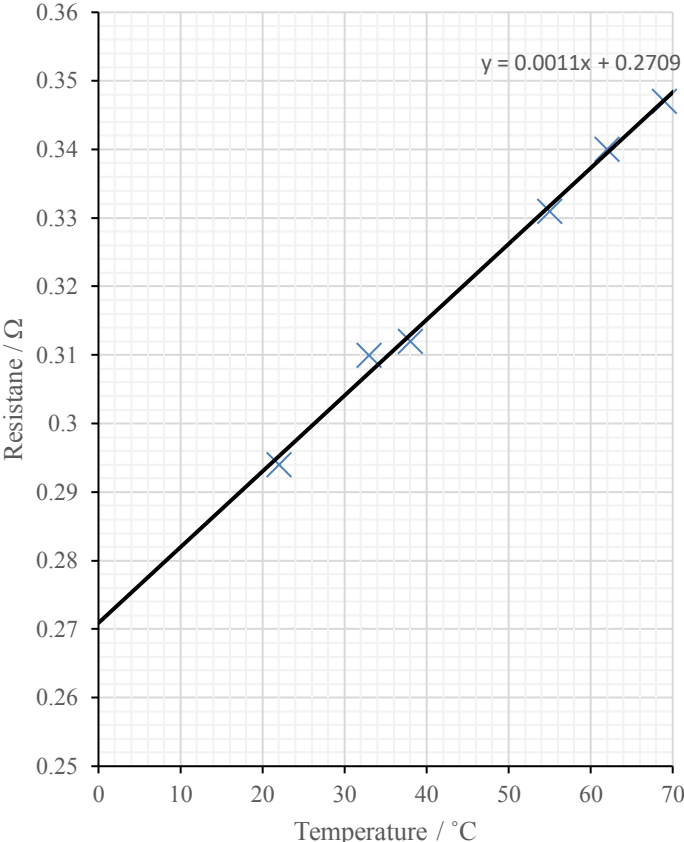
- All candidates must receive the same treatment. Examiners must mark the first candidate in exactly the same way as they mark the last.
- Mark schemes should be applied positively. Candidates must be rewarded for what they have shown they can do rather than penalised for omissions.
- Examiners should mark according to the mark scheme not according to their perception of where the grade boundaries may lie.
- There is no ceiling on achievement. All marks on the mark scheme should be used appropriately.
- All the marks on the mark scheme are designed to be awarded. Examiners should always award full marks if deserved, i.e. if the answer matches the mark scheme. Examiners should also be prepared to award zero marks if the candidate's response is not worthy of credit according to the mark scheme.
- Where some judgement is required, mark schemes will provide the principles by which marks will be awarded and exemplification may be limited.
- When examiners are in doubt regarding the application of the mark scheme to a candidate's response, the team leader must be consulted.
- Crossed out work should be marked UNLESS the candidate has replaced it with an alternative response.

Question Number	Answer	Mark
1(a)	<ul style="list-style-type: none"> • A measurement of distance travelled (1) • A measurement of time taken (1) • Appropriate measuring equipment for both, e.g. metre rule, stop clock, light gates (1) • See $s = ut + \frac{1}{2}at^2$ (1) • Repeat and calculate mean (1) <p>OR</p> <ul style="list-style-type: none"> • A measurement of distance travelled (1) • A measurement of (initial and) final velocity (1) • Appropriate measuring equipment for both, e.g. metre rule, stop clock, light gates (1) • See $v^2 = u^2 + 2as$ (1) • Repeat and calculate mean (1) <p>OR</p> <ul style="list-style-type: none"> • A measurement of (initial and) final velocity (1) • A measurement of time taken (1) • Appropriate measuring equipment for both, e.g. stop clock, light gates (1) • See $a = (v - u)/t$ (1) • Repeat and calculate mean (1) <p>For MP4</p> <ul style="list-style-type: none"> - accept correctly re-arranged versions - accept gradient of a correctly described graph - accept versions of equations where $u = 0$ has already been included. <p>e.g. $s = \frac{1}{2}at^2$</p> <p>MP1-2 could be described for the falling mass, as acceleration is the same</p>	5
1 (b)(i)	<ul style="list-style-type: none"> • (0.98, 2.8) and (0.78, 2.4) plotted correctly (1) • Straight line of best fit with a positive y-axis intercept (1) <p>Or curve of best fit (passing through origin)</p> <div style="display: flex; justify-content: space-around;">   </div>	2
1 (b)(ii)	<ul style="list-style-type: none"> • (Straight) line of best fit does not pass through the origin, so the conclusion is correct Or line of best fit is a curve, so the conclusion is correct Or accept answer consistent with incorrectly drawn line in (b)(i) 	1
1(c)	<ul style="list-style-type: none"> • Masses removed from the hanger are placed on the glider Or masses removed from the glider are placed on the hanger 	1
Total for question 1		9

Question Number	Answer	Mark										
2(a)(i)	• Normal drawn and critical angle indicated (1)	1										
2(a)(ii)	• Use of $\sin C = \frac{1}{n}$ with their measured value of C (1) • Refractive index = 1.58 to 1.70 (1) <table border="1"><thead><tr><th>$C / ^\circ$</th><th>n</th></tr></thead><tbody><tr><td>36</td><td>1.70</td></tr><tr><td>37</td><td>1.66</td></tr><tr><td>38</td><td>1.62</td></tr><tr><td>39</td><td>1.59</td></tr></tbody></table> MP1 accept correct use of $n_1 \sin \theta_1 = n_2 \sin \theta_2$, with $n_2 = 1$ and $\theta_2 = 90^\circ$ <u>Example calculation</u> $C = 38^\circ$ $\sin 38^\circ = \frac{1}{n}$ $n = 1.62$	$C / ^\circ$	n	36	1.70	37	1.66	38	1.62	39	1.59	2
$C / ^\circ$	n											
36	1.70											
37	1.66											
38	1.62											
39	1.59											
2(b)	• Use of $\sin C = \frac{1}{n}$ with either 40.5° or 41.5° (1) • Range of refractive index calculated (1) <u>Example calculation</u> $\sin 40.5^\circ = \frac{1}{n}$ $n = 1.54$ $\sin 41.5^\circ = \frac{1}{n}$ $n = 1.51$ $1.51 \leq n \leq 1.54$	2										
2(c)	• Use of $n_1 \sin \theta_1 = n_2 \sin \theta_2$ (1) • Refractive index = 1.53 (1) • Comparative statement consistent with the range from (b) (1) <u>Example calculation</u> $\sin 64 = n \sin 36$ $n = 1.53$	3										
2(d)	• The monochromatic light has a single wavelength/frequency Or White light is a mixture/range of wavelengths/frequencies (1) • The different wavelengths/colours would refract by different angles Or different wavelengths/colours would have different refractive indexes (1) • Monochromatic light would give less uncertainty in the <u>angle</u> (incident/refraction/critical) Or monochromatic light allows for a more accurate measurement of <u>angle</u> (1)	3										
2(e)	• Angle resolution of 0.1° compared to protractor resolution of 1° (1) • Beam from the collimator is narrower (than the ray from a ray box) (1) • So, uncertainty in angle (of refraction) is smaller (1) For MP1 – accept descriptions of protractor with resolution 0.5° For MP3 – must be clear the uncertainty is for the angle measurement	3										
	Total for question 2	14										

Question Number	Answer	Mark
3(a)	<ul style="list-style-type: none"> • Diagram showing rubber band suspended/clamped at one end (e.g. hanging from a clamp stand) (1) • Force applied to band (e.g. slotted masses hanging on free end) (1) • Measure initial length using a ruler Or mark position of bottom of band on ruler (1) • Measure new length/position and calculate extension (1) • Additional detail to improve accuracy e.g. method for reducing parallax Or additional detail to improve safety e.g. ensure feet are not under the masses in case they fall (1) <p>MP2-5 could be awarded for information shown on the diagram (e.g. metre rule and set squares seen on the diagram).</p> <p>Allow MP3 and 4 for set-up where 0 on metre rule is aligned with end of band before masses are added, to measure extension directly.</p>	5
3(b)	<ul style="list-style-type: none"> • Estimates the area inside the loop by counting squares Or estimates the area inside the loop by using simple shapes (1) • Calculates the energy of each square Or calculates the energy for one shape (1) • Energy transferred = 0.85 to 1.00 J (1) <p>MP1 and 2 Accept calculation of area under both curves which are then subtracted</p> <p><u>Example calculation</u> 77 squares counted Energy of 1 square = $0.5 \text{ N} \times 0.025 \text{ m} = 0.0125 \text{ J}$ Energy transferred = $77 \times 0.0125 \text{ J} = 0.96 \text{ J}$</p>	3
Total for question 3		8

Question Number	Answer	Mark
4(a)	<ul style="list-style-type: none"> Percentage uncertainty = 2.4% (accept 2%, 2.38%, 2.381%) (1) <p><u>Example Calculation</u></p> <p>Percentage uncertainty = $\frac{0.25}{10.5} \times 100\%$</p> <p>Percentage uncertainty = 2.4%</p>	1
4(b)	<p>Max 3 from</p> <ul style="list-style-type: none"> (Percentage) uncertainty will be reduced (1) The multimeter screen/display will not cause a parallax error (1) The multimeter can measure to a higher resolution Or the multimeter resolution can be increased by changing the setting (1) Or the multimeter measures to 2 d.p. (1) The digital multimeter will not require interpolation of values (1) 	3
	Total for question 4	4

Question Number	Answer	Mark														
5(a)	<ul style="list-style-type: none">Inconsistent number of decimal places for resistance Or resistance should be to 3 d.p. (to match ohmmeter resolution) (1)Inconsistent intervals in temperature Or large jump in temperature from 38 to 55 °C (1)	2														
5(b)	<ul style="list-style-type: none">Labels axes with quantities and units (1)Sensible scales (1)Plotting (2)Line of best fit (1) <div><table data-bbox="1032 663 1311 956"><thead><tr><th>$T / ^\circ\text{C}$</th><th>R / Ω</th></tr></thead><tbody><tr><td>69</td><td>0.347</td></tr><tr><td>62</td><td>0.34</td></tr><tr><td>55</td><td>0.331</td></tr><tr><td>38</td><td>0.312</td></tr><tr><td>33</td><td>0.31</td></tr><tr><td>22</td><td>0.294</td></tr></tbody></table></div>	$T / ^\circ\text{C}$	R / Ω	69	0.347	62	0.34	55	0.331	38	0.312	33	0.31	22	0.294	5
$T / ^\circ\text{C}$	R / Ω															
69	0.347															
62	0.34															
55	0.331															
38	0.312															
33	0.31															
22	0.294															
5(c)	<ul style="list-style-type: none">Extends line to y-axis intercept (1)Correct R_0 for the line drawn (1)Calculates gradient using large triangle (1)Use of gradient = αR_0 (1)$\alpha = 4.0 \times 10^{-3}$ to $4.2 \times 10^{-3} \text{ } (^{\circ}\text{C}^{-1})$ (1)Value of α to 2 or 3 sig fig and with correct units $^{\circ}\text{C}^{-1}$ (1) <p>For MP5 – accept a correct calculation using the given value for R_0 and gradient.</p> <p>For MP1 – 5 accept calculation of y-axis intercept using gradient or use of simultaneous equations for 2 pairs of points on the line.</p> <p><u>Example calculation</u> Gradient = $(0.348 - 0.282) / (70 - 10) = 0.0011 \text{ } \Omega \text{ } ^{\circ}\text{C}^{-1}$ α = gradient / R_0 = $0.0011 / 0.271 = 4.1 \times 10^{-3} \text{ } ^{\circ}\text{C}^{-1}$</p>	6														

5(d)	<ul style="list-style-type: none"> • Realistic modification suggested (1) • Explains how this improves the accuracy of the values (1) <p><u>Examples</u></p> <ul style="list-style-type: none"> • Take a resistance measurement at 0 °C • to measure R_0 accurately • Take resistance measurements for lower temperatures • to improve the accuracy of the gradient Or to improve the accuracy of the y-axis intercept • Take resistance measurements for smaller increments of temperature • to improve the accuracy of the gradient Or to improve the accuracy of the y-axis intercept • Take resistance measurements for a wider range of temperatures • to improve the accuracy of the gradient Or to improve the accuracy of the y-axis intercept • Stir the water regularly Or place the thermometer inside the copper coil • so the temperature of water plotted is the same as the temperature of the copper • Use a datalogger to measure temperature and resistance • so that the values are recorded simultaneously • Use a digital thermometer • to avoid parallax error <p>Ignore higher resolution for a digital thermometer.</p>	2
	Total for question 5	15

