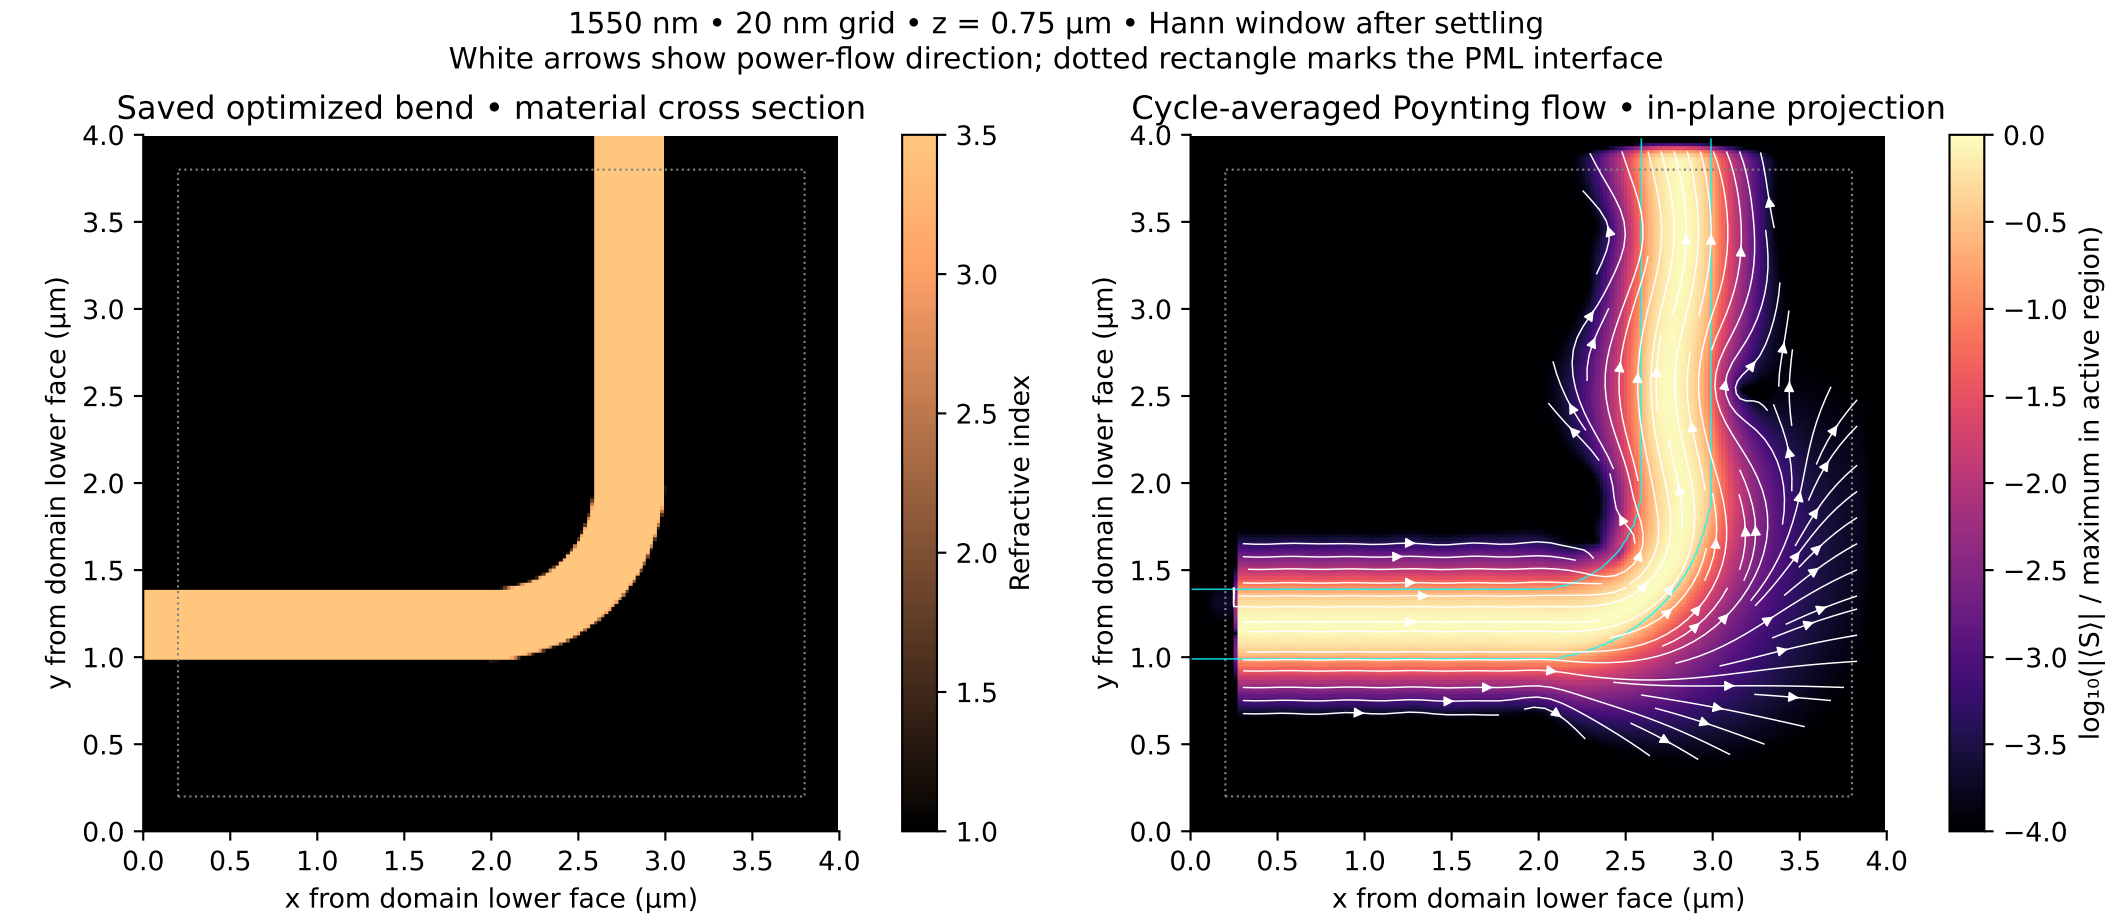

1550 nm • 20 nm grid • z = 0.75 µm • Hann window after settling
White arrows show power-flow direction; dotted rectangle marks the PML interface
Saved optimized bend • material cross section
Cycle-averaged Poynting flow • in-plane projection
y from domain lower face (µm)
x from domain lower face (µm)
Refractive index
log₁₀(|⟨S⟩| / maximum in active region)
0.0
0.5
1.0
1.5
2.0
2.5
3.0
3.5
4.0
−0.5
−1.0
−1.5
−2.0
−2.5
−3.0
−3.5
−4.0