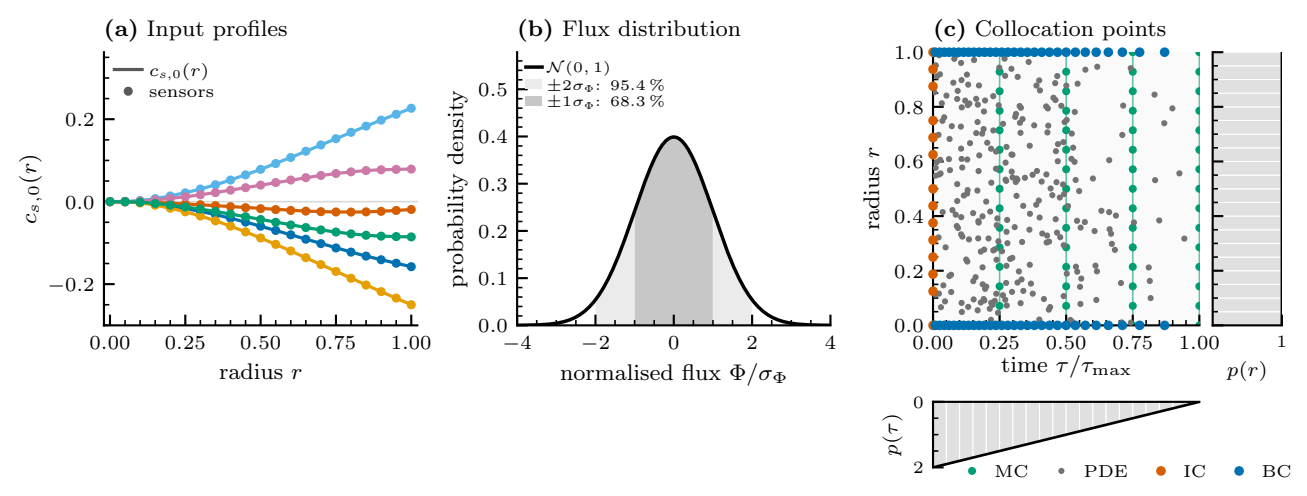

(a) Input profiles
$c_{s,0}(r)$
sensors
$c_{s,0}(r)$
radius r
(b) Flux distribution
$\mathcal{N}(0,1)$
$\pm 2\sigma_\Phi$: 95.4 %
$\pm 1\sigma_\Phi$: 68.3 %
probability density
normalised flux Φ/σ_Φ
(c) Collocation points
radius r
time $\tau/\tau_{\max}$
$p(r)$
$p(\tau)$
MC
PDE
IC
BC