Optimal Control for Autonomous Drone Racing

Aleix Paris[1]

***Abstract*— This paper studies the problem of optimal control of a quadrotor to minimize the time it takes it to pass trough several waypoints, that is, to finish a race.**

I. INTRODUCTION

Optimal control problems have been widely studied... The Red Bull Air Race, where airplanes cross gates to end a circuit as fast as possible is an example of a similar problem that has been studied... Nowadays, every team has the role of a 'tactician', which is in charge of...

MENTION PARKER AND AUTONOMOUS DRONE RACING COMPETITIONS...

The paper is structured as follows: Section II presents the formulation of this problem, Section...

II. PROBLEM FORMULATION

Several authors have studied quadrotor dynamics [1]. This section presents the geometry of a quadrotor, its dynamics and the mathematical formulation of the problem in hand.

A. Assumptions

The formulation that follows considers the following assumptions:

1) The maximum and minimum altitudes of the quadrotor are similar and thus the air density and gravity are constants.
2) The vehicle is flying in zero-wind conditions.
3) No ground effect is considered.
4) The angular velocities of the rotors are similar, and the rotors' inertia is small.
5) The quadrotor is symmetrical with its four arms aligned with the body x- and y-axes.
6) The propellers are rigid and thus blade flapping does not occur.

B. Quadrotor Geometry and Notation

The quadrotor's absolute linear position is defined in the inertial frame with the vector $\boldsymbol{\xi}$. Similarly, the attitude (angular position of the drone with respect to the inertial frame) is defined with the vector $\boldsymbol{\eta}$. Roll angle ϕ determines the rotation of the vehicle around the x-axis, pitch angle θ defines a rotation around the y-axis, and yaw angle ψ determines the quadrotor's rotation around the z-axis:

$$\boldsymbol{\xi} = \begin{bmatrix} x \\ y \\ z \end{bmatrix}, \quad \boldsymbol{\eta} = \begin{bmatrix} \phi \\ \theta \\ \psi \end{bmatrix}$$

[1]Graduate Research Assistant at the Aerospace Controls Laboratory, MIT, 77 Massachusetts Ave., Cambridge, MA, USA aleix@mit.edu

The origin of the body frame, indicated with a B, is the center of mass of the quadrotor. In this frame, the vehicle's linear velocities $\boldsymbol{V_B}$ and angular velocities $\boldsymbol{\nu}$ are:

$$\boldsymbol{V}_B = \begin{bmatrix} v_{x,B} \\ v_{y,B} \\ v_{z,B} \end{bmatrix}, \quad \boldsymbol{\nu} = \begin{bmatrix} p \\ q \\ r \end{bmatrix}$$

Figure 1 shows the inertial and body frame, as well as the Euler and angular velocity angles defined previously.

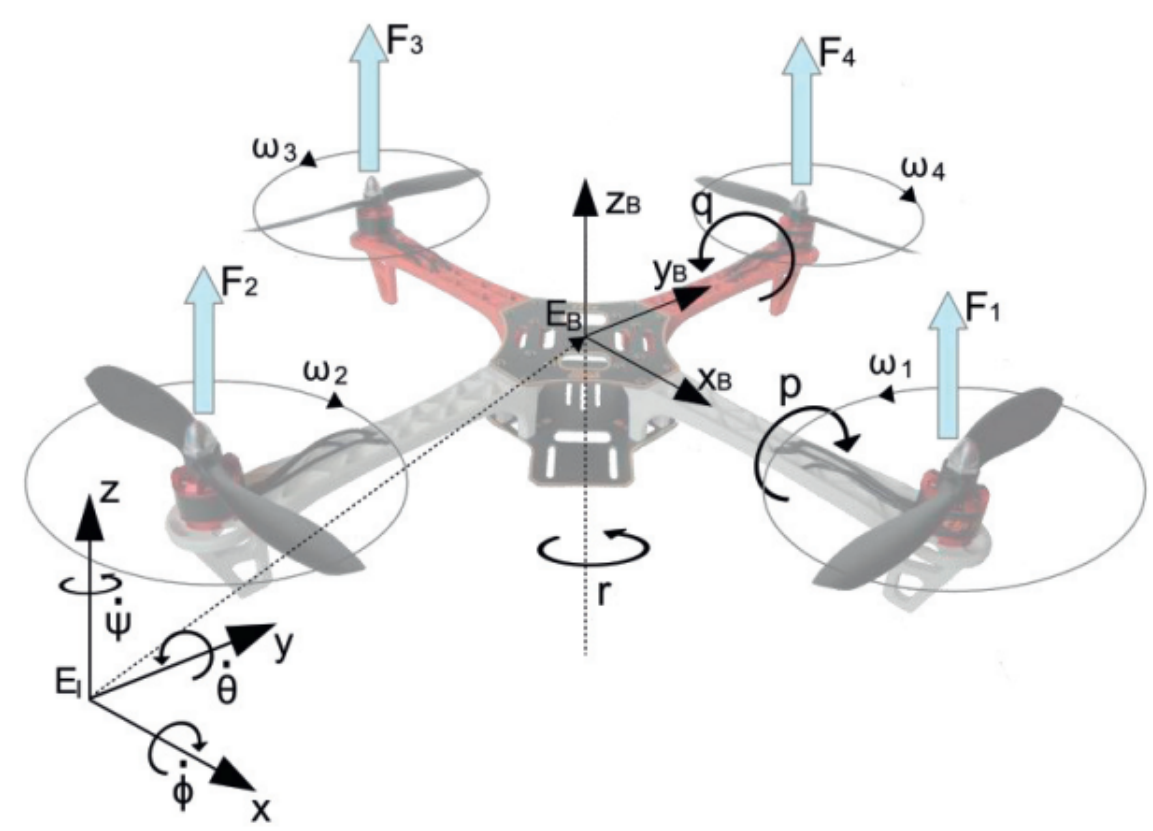

Fig. 1. Inertial and body-fixed frame of the quadrotor, showing the Euler and angular velocity angles [?]

The rotation from the body frame to the inertial frame can be defined with the matrix

$$\boldsymbol{R} = \begin{bmatrix} C_\psi C_\theta & C_\psi S_\theta S_\phi - S_\psi C_\phi & C_\psi S_\theta C_\phi + S_\psi S_\phi \\ S_\psi C_\theta & S_\psi S_\theta S_\phi + C_\psi C_\phi & S_\psi S_\theta C_\phi - C_\psi S_\phi \\ -S_\theta & C_\theta S_\phi & C_\theta C_\phi \end{bmatrix}$$

in which $S_x = \sin(x)$ and $C_x = \cos(x)$. Note that this rotation matrix is orthogonal and thus the rotation matrix from the inertial frame to the body frame is $\boldsymbol{R^{-1}} = \boldsymbol{R^T}$.

To obtain the angular velocities in the body frame from the angular velocities in the inertial frame, the matrix $\boldsymbol{W_\eta}$ should be used:

$$\boldsymbol{\nu} = \boldsymbol{W}_\eta \dot{\boldsymbol{\eta}}, \qquad \begin{bmatrix} p \\ q \\ r \end{bmatrix} = \begin{bmatrix} 1 & 0 & -S_\theta \\ 0 & C_\phi & C_\theta S_\phi \\ 0 & -S_\phi & C_\theta C_\phi \end{bmatrix} \begin{bmatrix} \dot\phi \\ \dot\theta \\ \dot\psi \end{bmatrix}$$

Its inverse is the transformation matrix from the body frame to the inertial frame, which will be used later to assemble the quadrotor dynamics:

$$\dot{\boldsymbol{\eta}} = \boldsymbol{W}_\eta^{-1}\boldsymbol{\nu}, \quad \begin{bmatrix} \dot{\phi} \\ \dot{\theta} \\ \dot{\psi} \end{bmatrix} = \begin{bmatrix} 1 & S_\phi T_\theta & C_\phi T_\theta \\ 0 & C_\phi & -S_\phi \\ 0 & S_\phi / C_\theta & C_\phi / C_\theta \end{bmatrix} \begin{bmatrix} p \\ q \\ r \end{bmatrix}$$

where $T_x = \tan(x)$.

As shown in Figure 1 and stated in assumption 5, the drone is symmetric with the arms aligned with the body axes. Therefore, the inertia matrix $\mathbf{I}$ is diagonal, and $I_{xx} = I_{yy}$:

$$\boldsymbol{I} = \begin{bmatrix} I_{xx} & 0 & 0 \\ 0 & I_{yy} & 0 \\ 0 & 0 & I_{zz} \end{bmatrix}$$

C. *Quadrotor Dynamics*

The force f_i created by the angular velocity of rotor i, denoted with ω_i, in the direction of the rotor axis is:

$$f_i = k\omega_i^2$$

Additionally, torque τ_{M_i} is created around the rotor axis:

$$\tau_{M_i} = b\omega_i^2 + I_r \dot{\omega}_i$$

where the lift constant is k, the drag constant is b and the inertia moment of the rotor is I_r. As assumption 4 considered, the rotor's inertia is small, and $\dot{\omega}_i$ is also usually small. Therefore, this term can be omitted.

The rotors create thrust T in the direction of the body z-axis, and torque $\boldsymbol{\tau_B}$ consists of torques $\tau_\phi, \tau_\theta, \tau_\psi$ in the direction of the corresponding body frame angles:

$$T = \sum_{i=1}^{4} f_i = k \sum_{i=1}^{4} \omega_i^2, \qquad \boldsymbol{T}^B = \begin{bmatrix} 0 \\ 0 \\ T \end{bmatrix}$$

$$\boldsymbol{\tau}_B = \begin{bmatrix} \tau_\phi \\ \tau_\theta \\ \tau_\psi \end{bmatrix} = \begin{bmatrix} lk\left(-\omega_2^2 + \omega_4^2\right) \\ lk\left(-\omega_1^2 + \omega_3^2\right) \\ \sum_{i=1}^{4} \tau_{M_i} \end{bmatrix}$$

in which l is the distance between the rotor and the center of mass of the quadcopter.

The Newton-Euler equations for the quadrotor are:

$$m\ddot{\boldsymbol{\xi}} = \boldsymbol{G} + \boldsymbol{R}\boldsymbol{T}_B$$

$$\begin{bmatrix} \ddot{x} \\ \ddot{y} \\ \ddot{z} \end{bmatrix} = -g \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} + \frac{T}{m} \begin{bmatrix} C_\psi S_\theta C_\phi + S_\psi S_\phi \\ S_\psi S_\theta C_\phi - C_\psi S_\phi \\ C_\theta C_\phi \end{bmatrix}$$

where g is Earth's gravity, 9.81 m/s^2.

III. RESULTS

Explain solved using GPOPS.

IV. CONCLUSIONS

Conclusions

APPENDIX

Nothing...
Citation: [1].

REFERENCES

[1] S. Zhang, C. Zhu, J. K. O. Sin, and P. K. T. Mok. A novel ultrathin elevated channel low-temperature poly-Si TFT. 20:569–571, November 1999.