



GFDL-ESM4, ssp370, Litter, In(MSE/SIGMA) 345, -0.7872, 146.9442, 0.4441, 0.0520, -1.0000, 0.9995, 0.9500, 0 - 5.6 1750 -- 4.8 1500 -- 4.0 1250 -- 3.2 1000 -- 2.4 750 - 1.6 500 - 0.8 250 -GFDL-ESM4 0.0 1.5 2.0 2.5 -1.00.0 0.5 1.0 3.0 -0.5lit_c_l



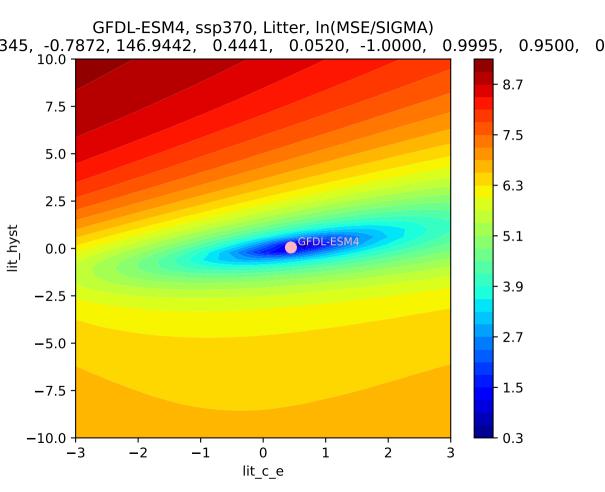

GFDL-ESM4, ssp370, Litter, In(MSE/SIGMA) 345, -0.7872, 146.9442, 0.4441, 0.0520, -1.0000, 0.9995, 0.9500, 0 - 6.2 0.94 -- 5.6 0.92 -- 5.0 0.90 -4.4 lit_slow 0.88 -- 3.8 0.86 -- 3.2 0.84 -2.6 0.82 -2.0 0.80 +0.92 0.94 0.96 0.98 1.00 0.90 lit_fast

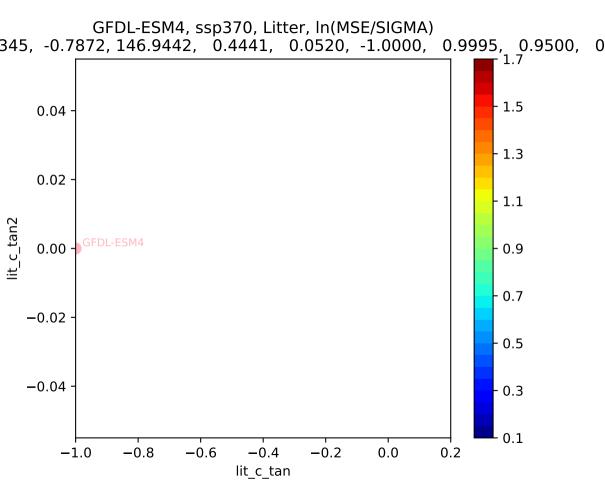