



GFDL-ESM4, ssp126, Litter, In(MSE/SIGMA) 345, -0.7872, 146.9442, 0.4441, 0.0520, -1.0000, 0.9995, 0.9500, 0 - 5.6 1750 -4.8 1500 -- 4.0 1250 -- 3.2 1000 -- 2.4 750 - 1.6 500 8.0 250 -0.0 0.0 1.5 2.0 2.5 -1.00.5 1.0 3.0 -0.5lit_c_l



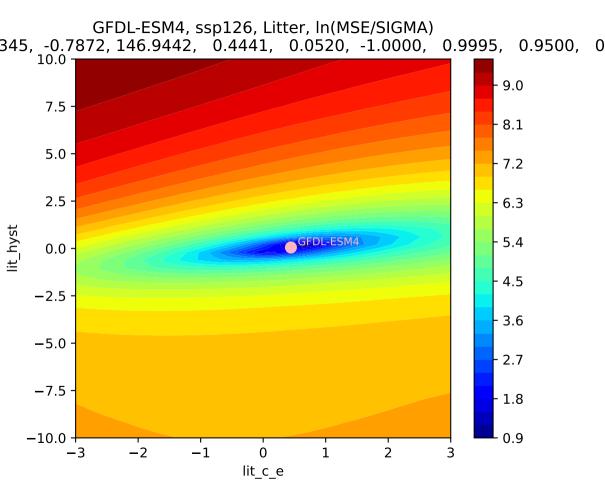

GFDL-ESM4, ssp126, Litter, In(MSE/SIGMA) 345, -0.7872, 146.9442, 0.4441, 0.0520, -1.0000, 0.9995, 0.9500, 0 - 6.6 0.94 -- 6.0 0.92 -- 5.4 0.90 -4.8 lit_slow 0.88 - 4.2 - 3.6 0.86 -- 3.0 0.84 -- 2.4 0.82 -1.8 0.80 +0.92 0.94 0.96 0.98 1.00 0.90 lit_fast

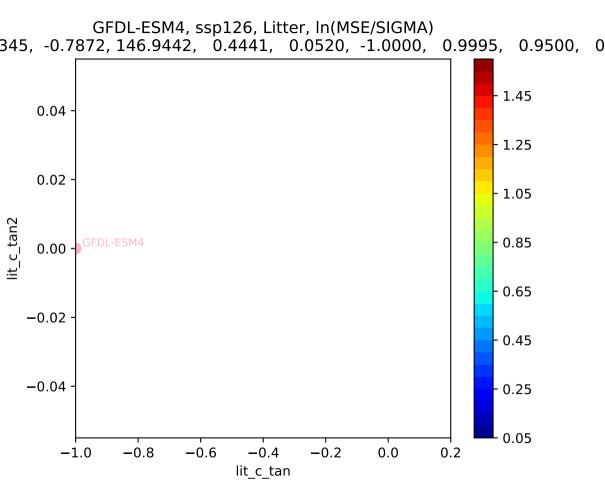