75 YEARS WIDOS
Plastic Fusion Innovation

THE ULTIMATE WELDING MACHINE

GS 16

New generation of butt-welding machines for field and on-site works

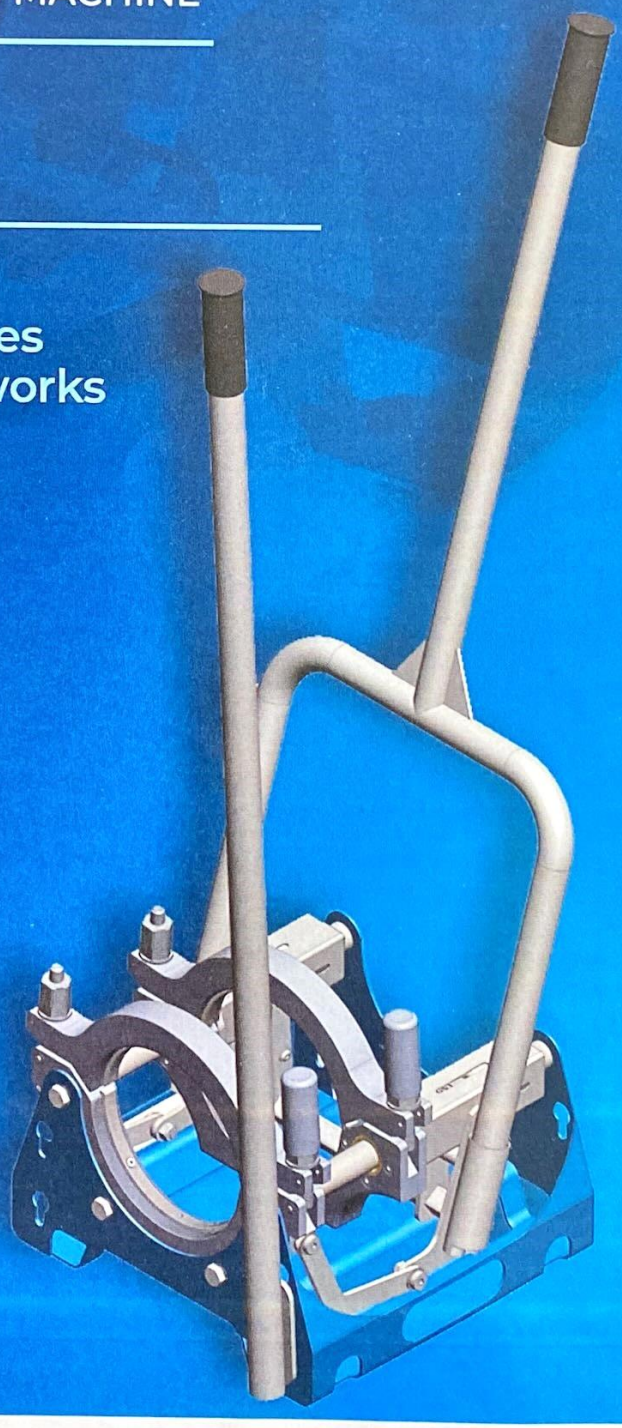

GS 16

Challenging working site conditions increase the need for machines that are easy to handle and robust to support tough open field environment.

The market demand of lighter, modular and user-friendly fusion equipment for quick and reliable piping installations on-site and inside the trenches, where space is limited, dictates the next machines generation design.

WIDOS proudly presents the first manual machine of this generation, the GS 16 butt-welding machine, a lever-actuated spring-loaded welding machine.

FEATURES

The GS 16 machine is equipped with a visual display, that shows welding pressures for bead up, heat soak, weld force and cool down, avoiding Inconsistencies of weld appearance due to non-controlled / non-verified weld pressures.
This mechanism includes a strong spring mechanism that creates permanent pressure during the welding process.
In the same way, its new locking mechanism secures lever generated weld pressures or heat soak contact.
Capable of welding from 1" IPS to 6" IPS HDPE pipe sizes.
Capable of welding from 32mm to 160mm HDPE or PP-R/PP-RCT pipe sizes.

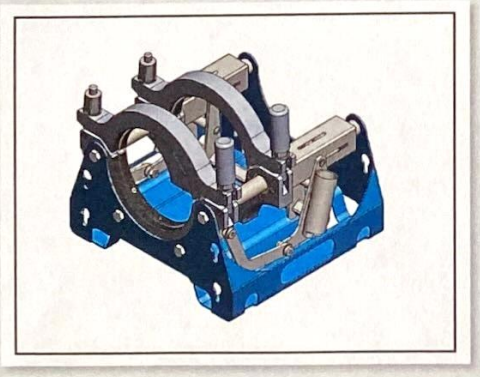

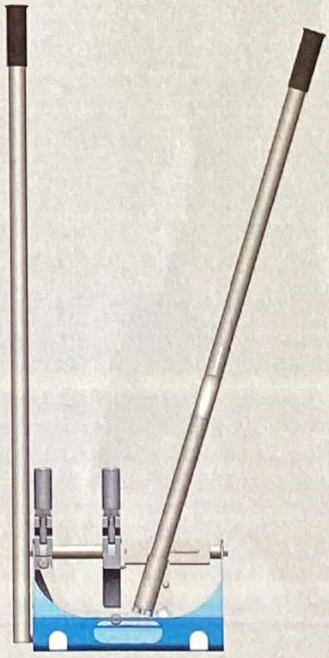

BASIC MACHINE:

Light weight & Compact design.
Robust and rugged construction for use in the dirt.
2 ring working configuration.
Easy transportation.

HEATING ELEMENT:

Electronic temperature control.
On / off switch in red light.
Control lamp in green light.
Connecting cable and plug.

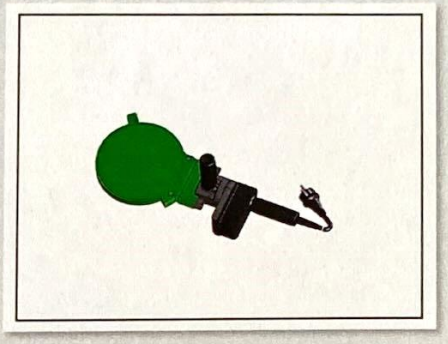

PLANER:

Monophase-alternating current-motor.
Switch on/off with fixing device.
Connecting cable and plug.

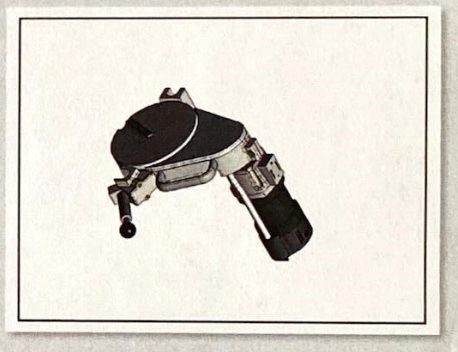

TECHNICAL DATA

Description	Weight	Dimensions (mm)	
Basic machine, as 2-Ring configuration and basic frame (32mm - 160mm (1" - 6")	22 Kg (48.5 lbs)	310x356x340	
Heating element	3.6 Kg (7.9 lbs)	520x210x175	
Planer	9.1 Kg (20 lbs)	395x379x303	
Protection Box	4.8 Kg (10.6 lbs)	446x270x190	

WIDOS
Welding. Together.

WIDOS
WILHELM DOMMER
SÖHNE GMBH

Einsteinstraße 5
71254 Ditzingen | Germany

Fon: +49 7152 9939 0
Fax: +49 7152 9939 40

info@widos.de

www.widos.de