
Настройка NAT в Cisco Packet Tracer

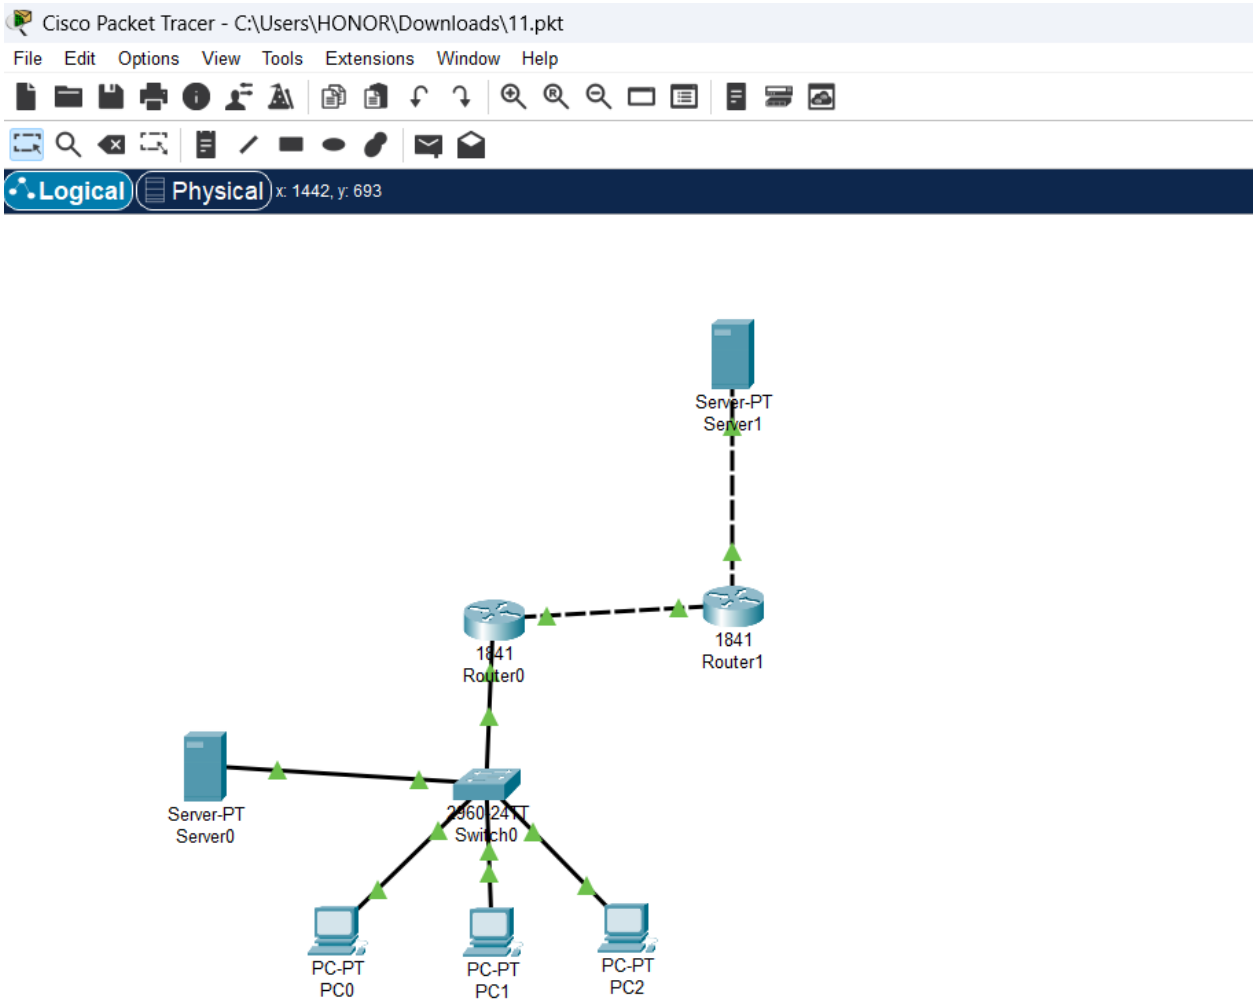

Схема

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0.3, changed state to up

%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%SYS-5-CONFIG_I: Configured from console by console

Building configuration...
[OK]
Router#show run
Building configuration...

Current configuration : 780 bytes
!
version 12.4
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Router
!
!
!
!
!
!
!
!
ip cef
no ipv6 cef
!
!
!
!
!
!
!
!
!
!
!
!

Router#show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
FastEthernet0/0        unassigned      YES unset  up                    up
FastEthernet0/0.2      192.168.2.1     YES manual up                    up
FastEthernet0/0.3      192.168.3.1     YES manual up                    up
FastEthernet0/1        213.234.10.2    YES manual up                    down
Vlan1                  unassigned      YES unset  administratively down down
Router#
```

Рис.1. Настройка сабинтерфейсов VLAN на Router0.

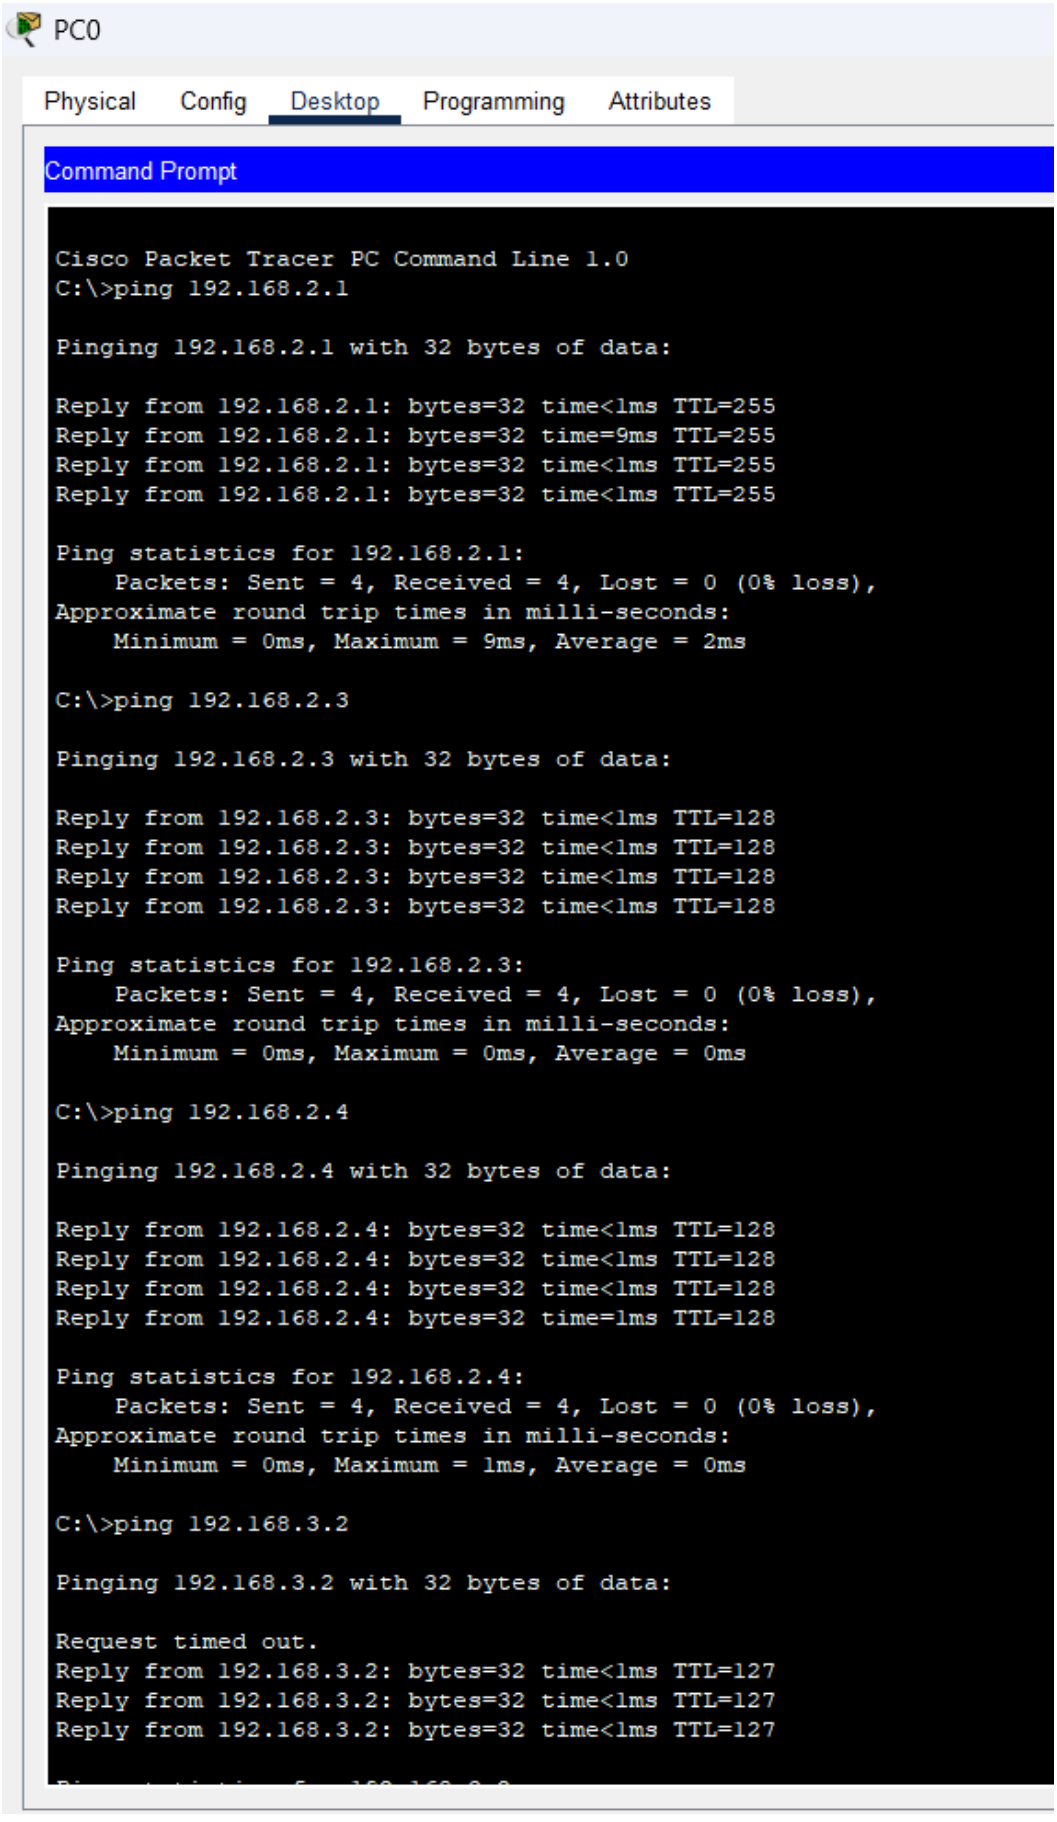


Рис. 2. Связь компьютера PC0 со шлюзом, другими ПК и сервером.

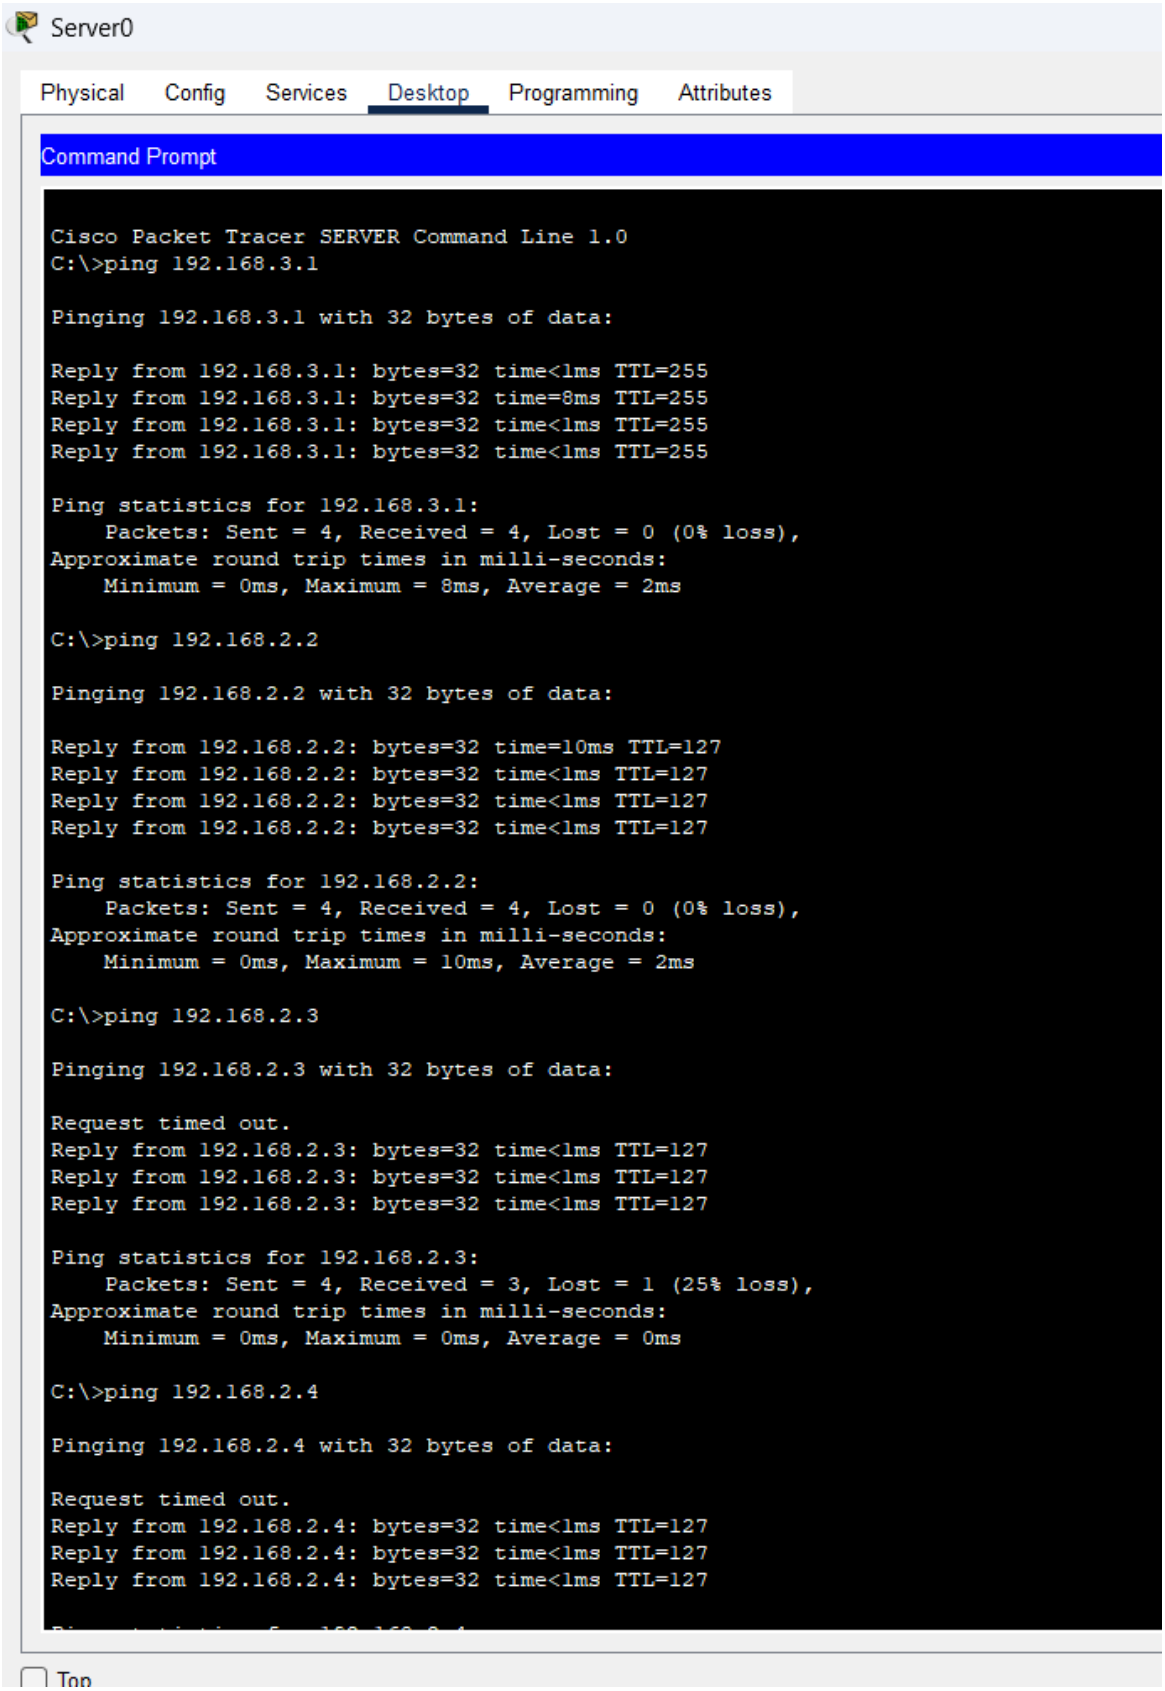


Рис. 3. Связь сервера с ПК и шлюзом.

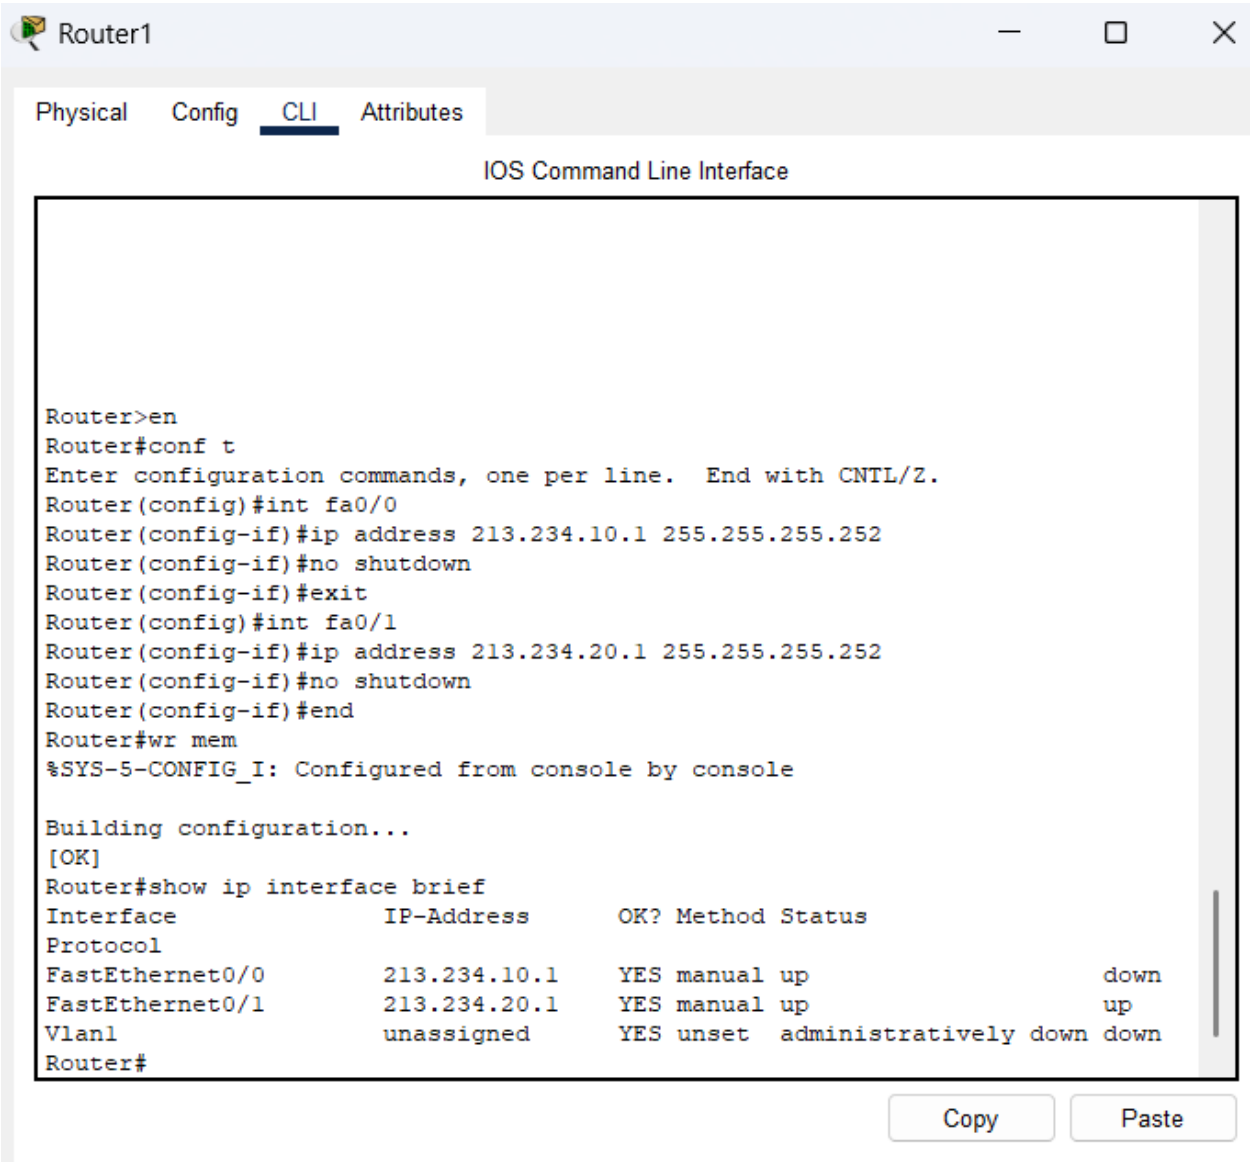


Рис. 4. Настройка интерфейсов провайдера (Router1).

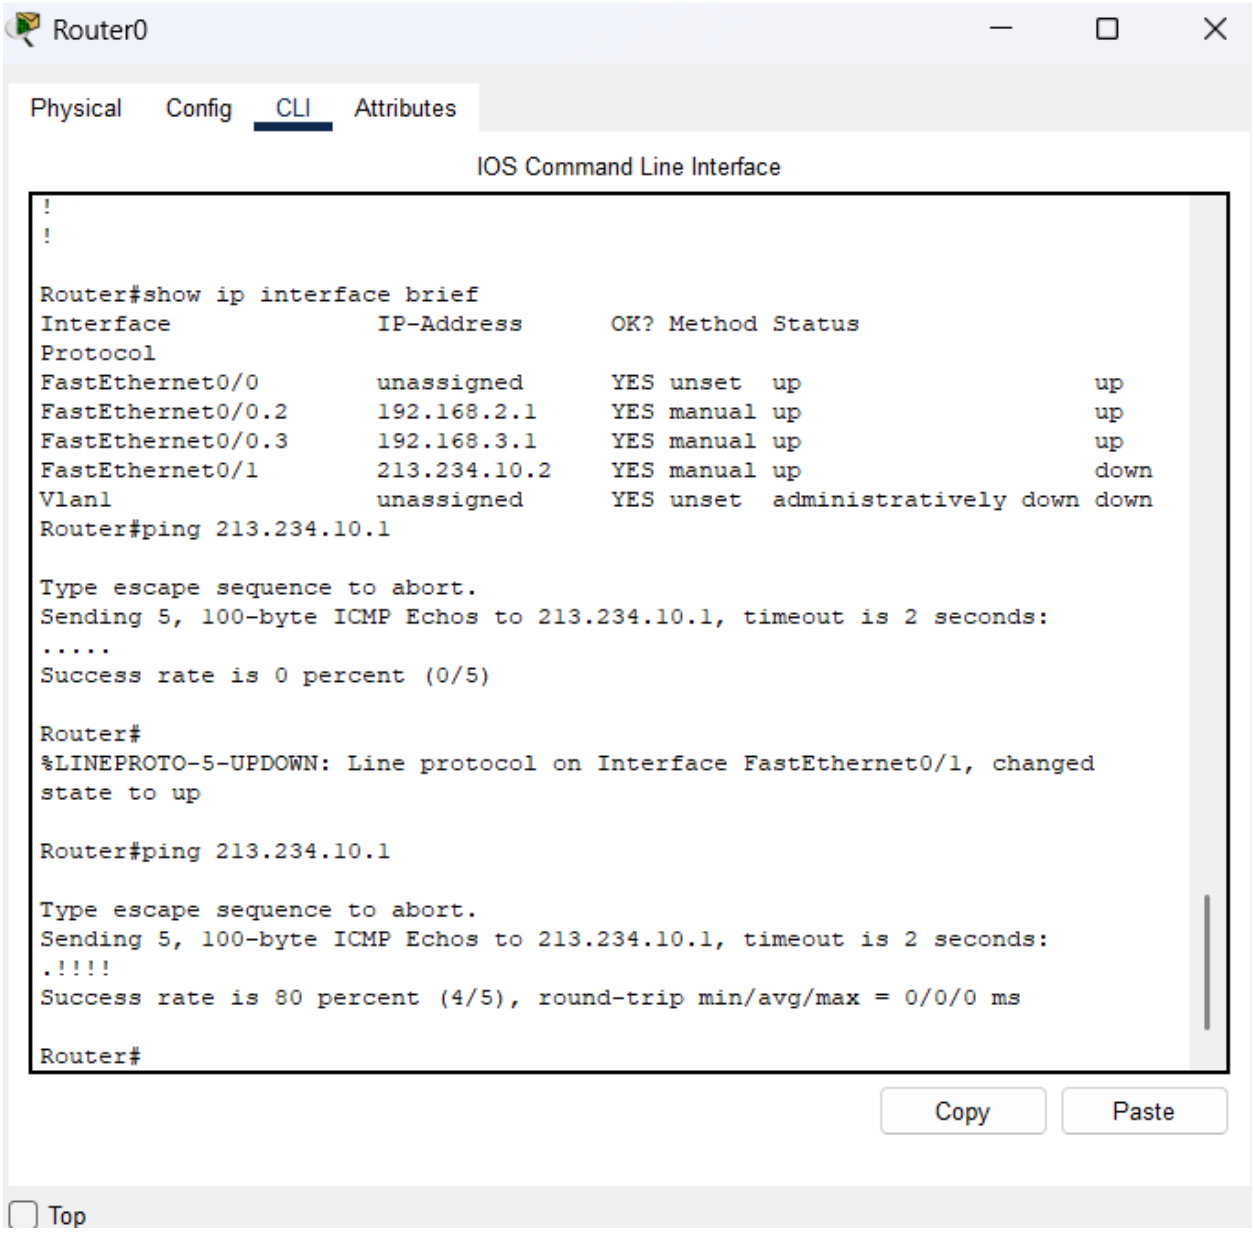


Рис. 5. Проверка связи пограничного роутера с провайдером.

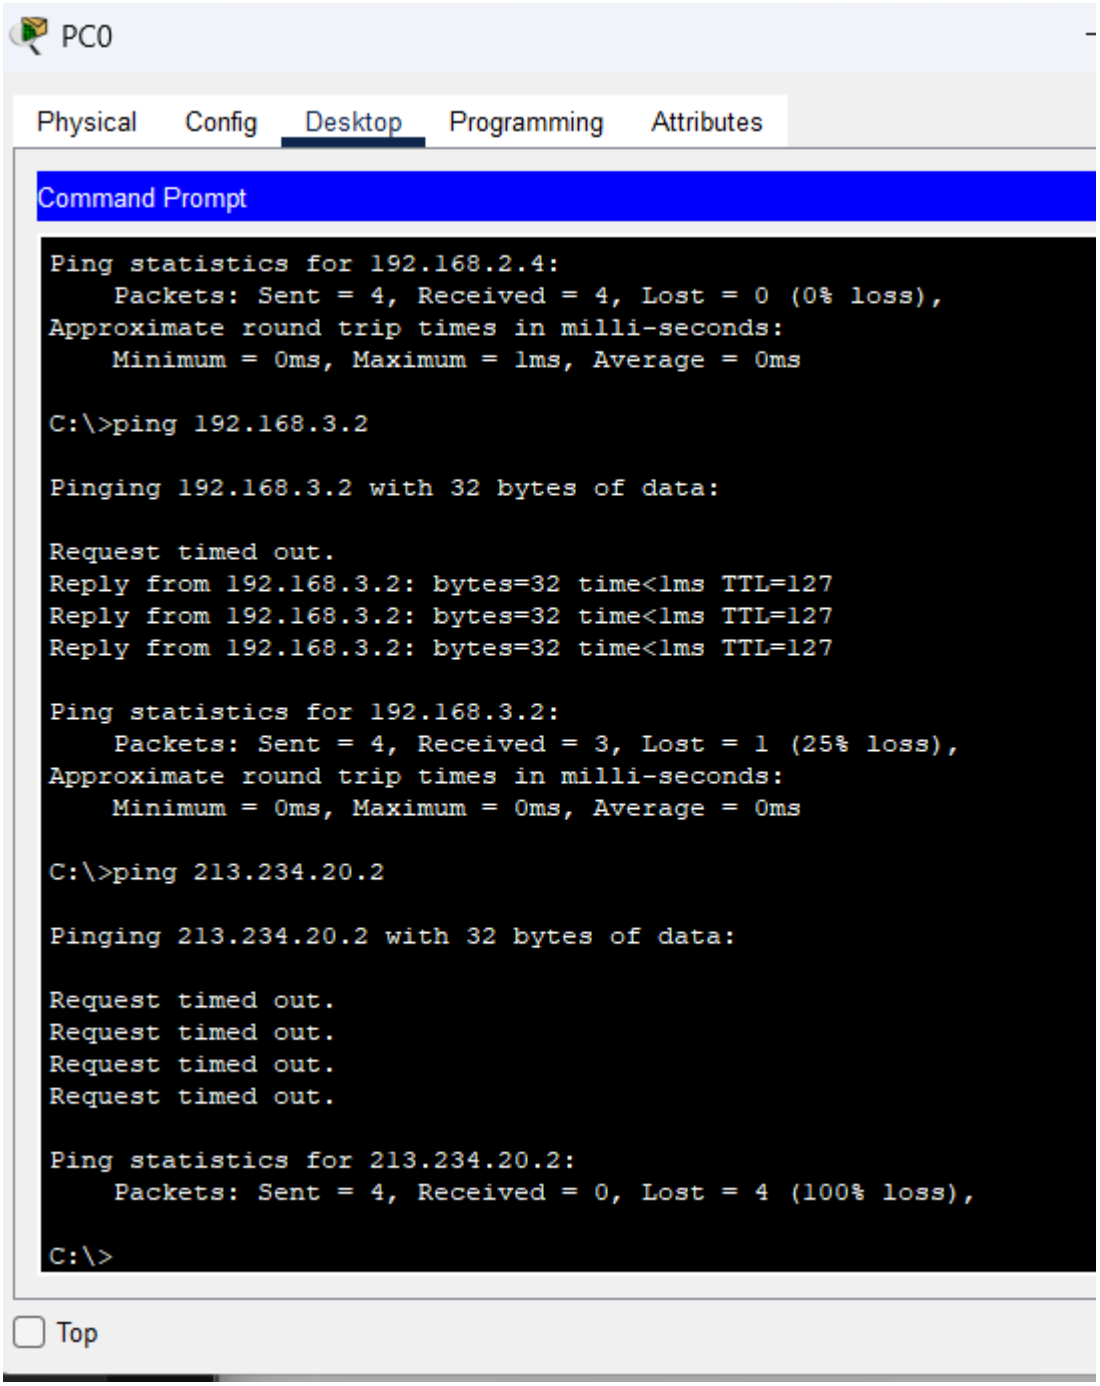


Рис. 6. Отсутствие связи до настройки NAT.

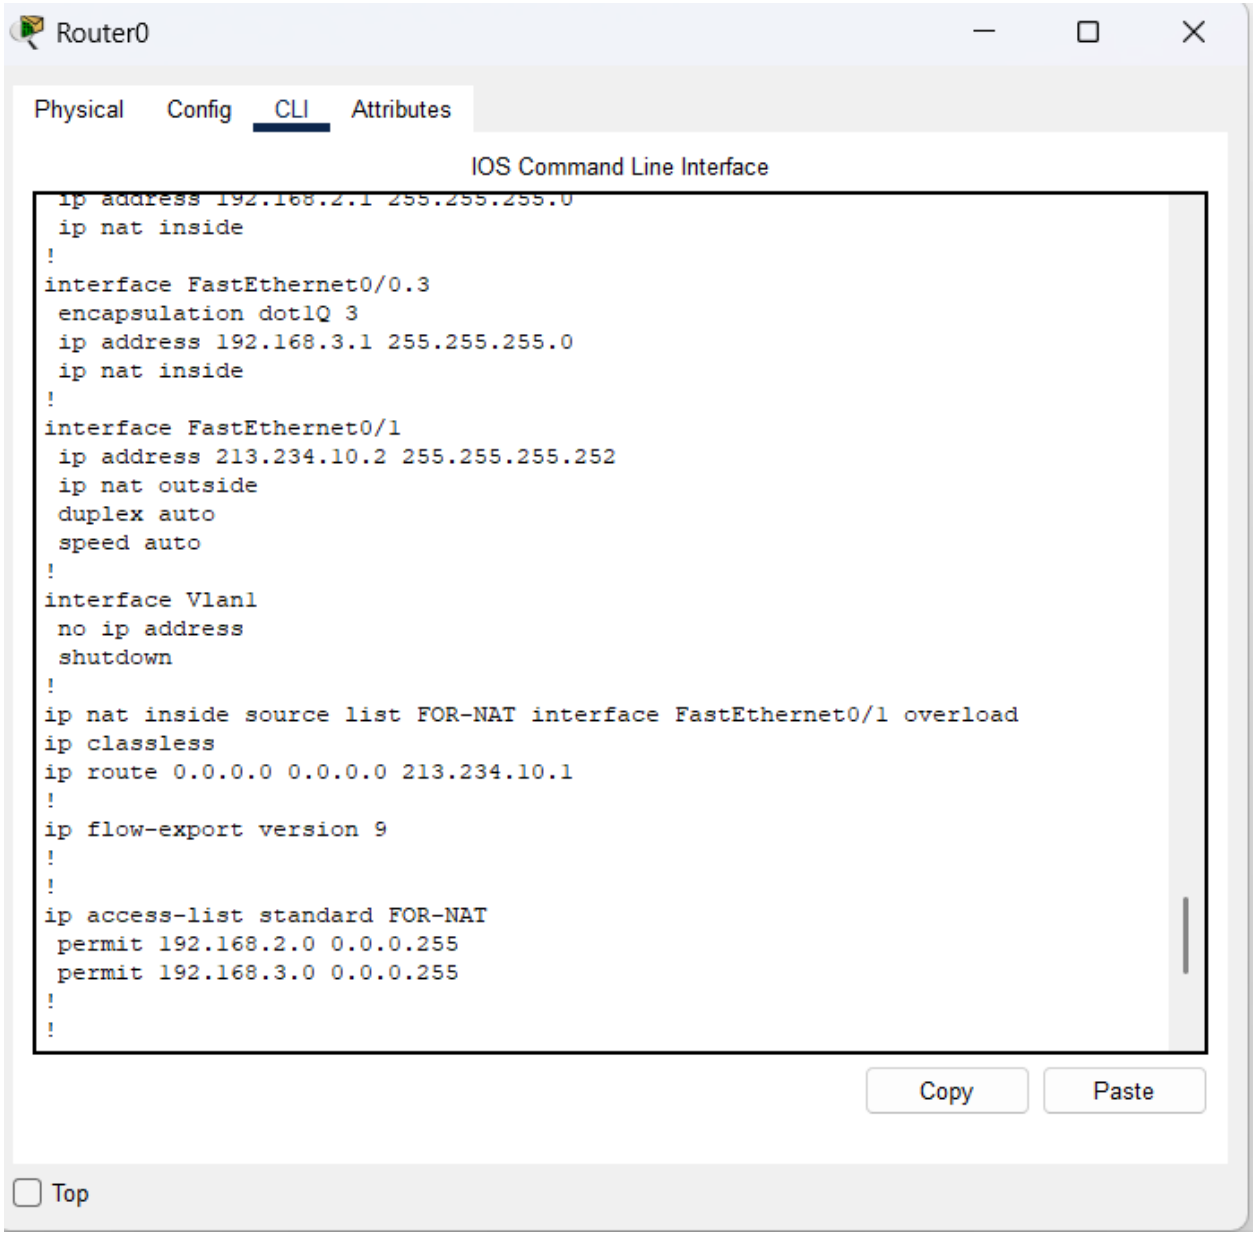


Рис. 7. Конфигурация NAT и ACL на Router0.

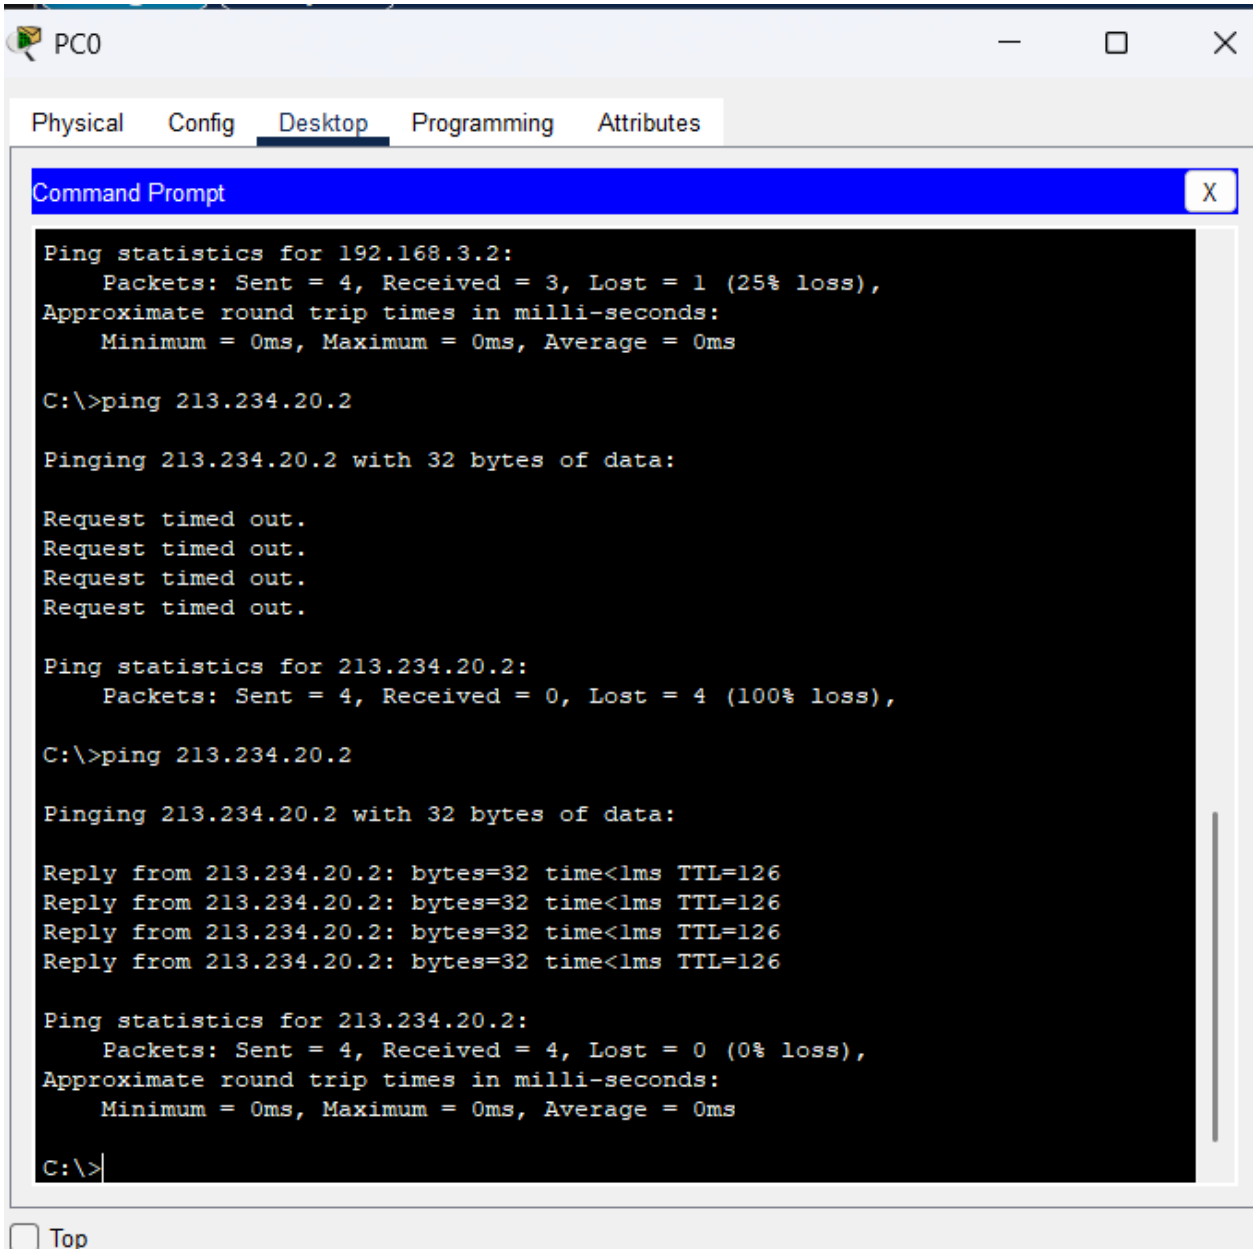


Рис. 8. Работа PAT (доступ в Интернет).

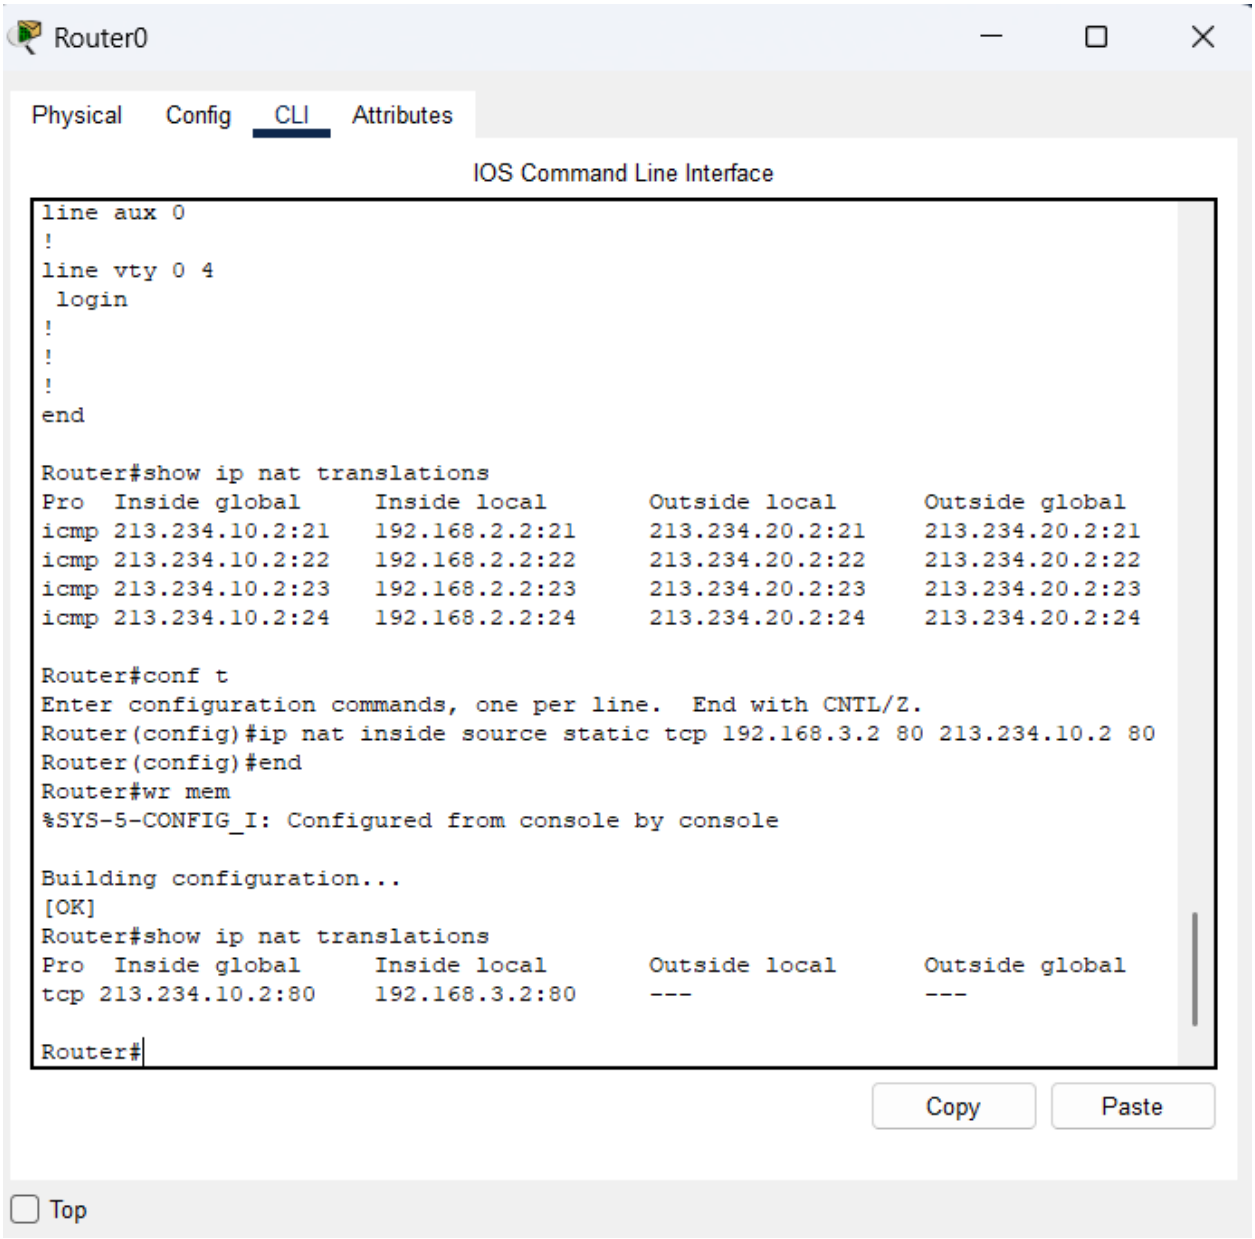
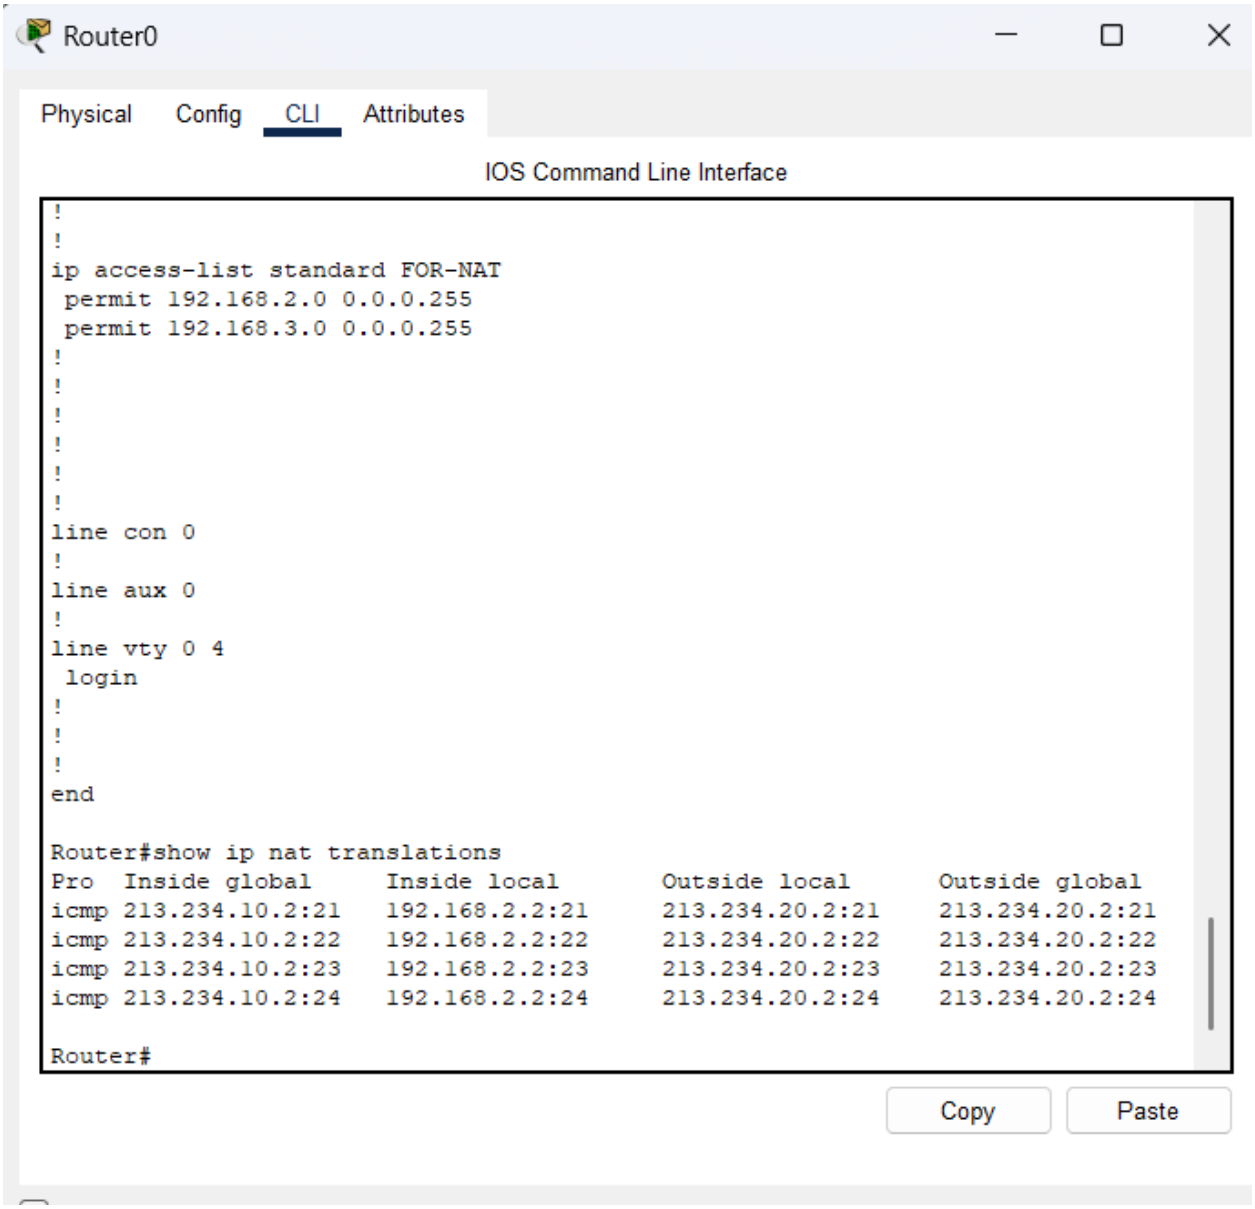


Рис. 9. Таблица трансляций Static NAT.


Router0
Physical
Config
CLI
Attributes
IOS Command Line Interface
!
!
ip access-list standard FOR-NAT
 permit 192.168.2.0 0.0.0.255
 permit 192.168.3.0 0.0.0.255
!
!
!
!
!
!
line con 0
!
line aux 0
!
line vty 0 4
 login
!
!
!
end
Router#show ip nat translations
Pro Inside global   Inside local   Outside local   Outside global
icmp 213.234.10.2:21   192.168.2.2:21   213.234.20.2:21   213.234.20.2:21
icmp 213.234.10.2:22   192.168.2.2:22   213.234.20.2:22   213.234.20.2:22
icmp 213.234.10.2:23   192.168.2.2:23   213.234.20.2:23   213.234.20.2:23
icmp 213.234.10.2:24   192.168.2.2:24   213.234.20.2:24   213.234.20.2:24
Router#
Copy
Paste

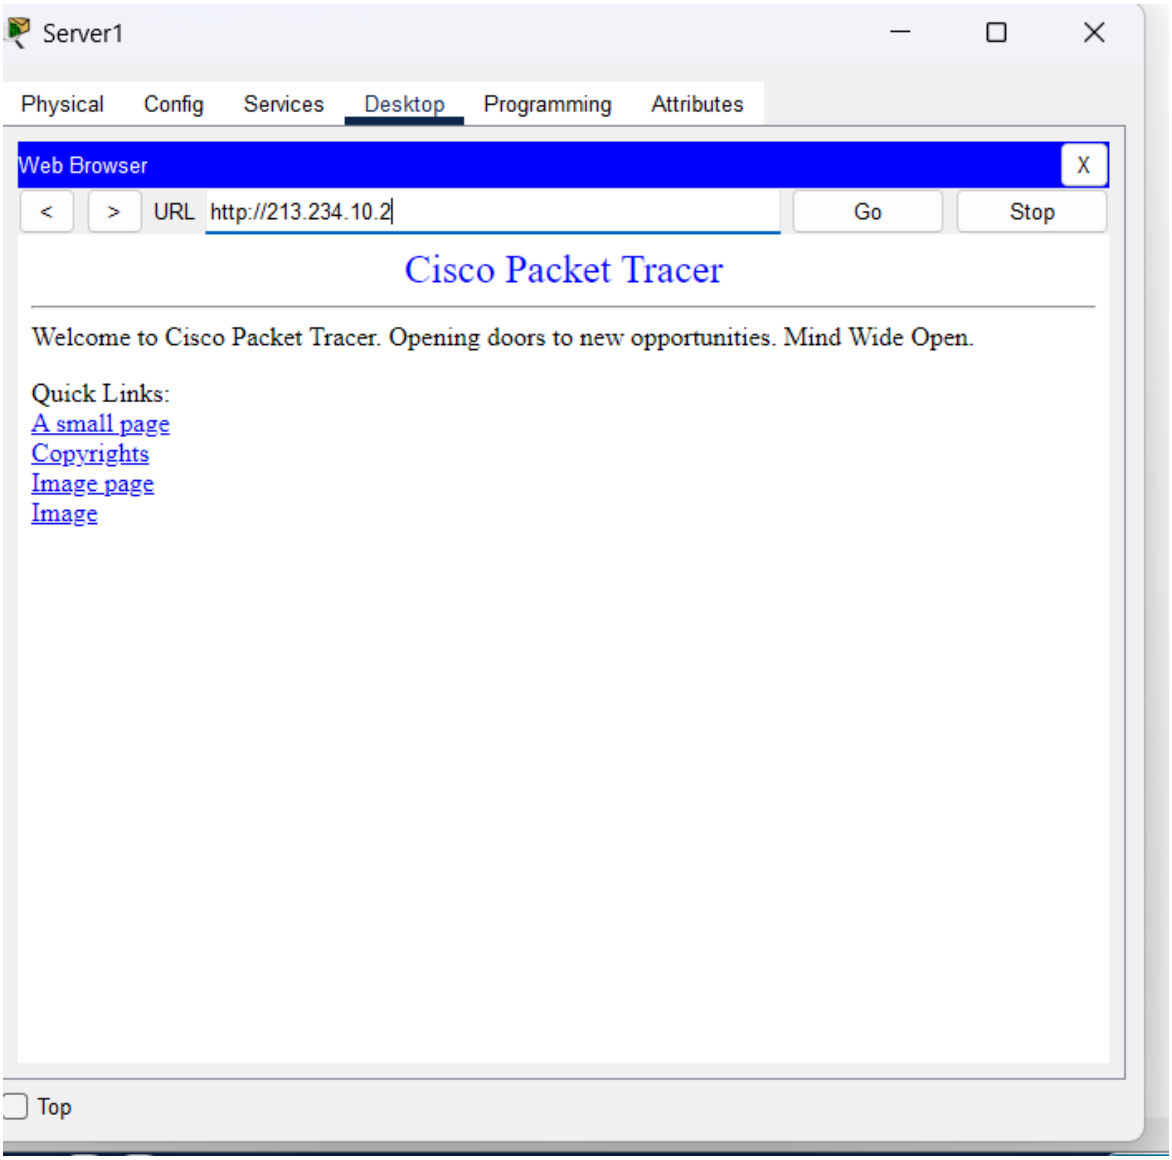
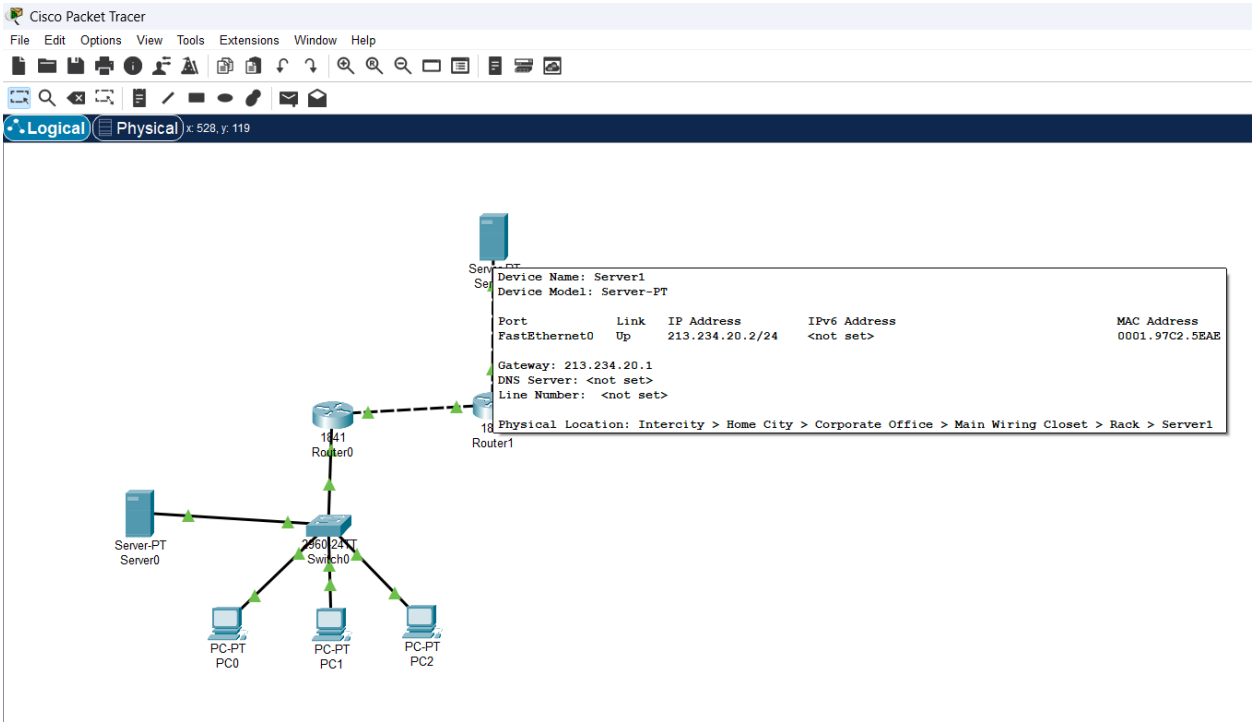
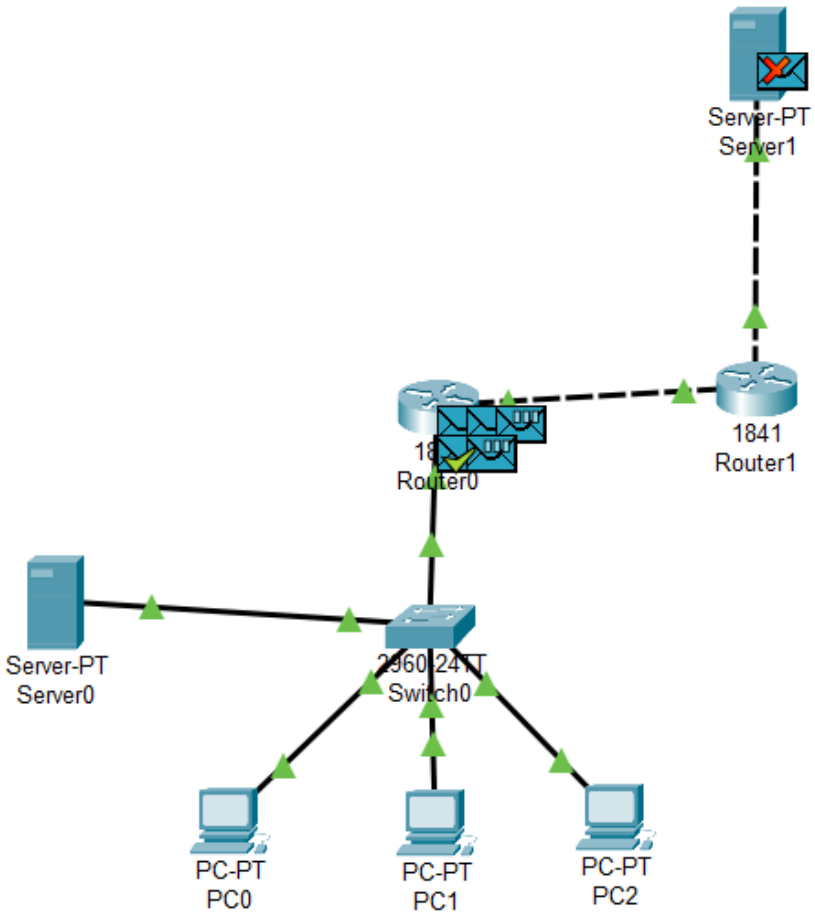
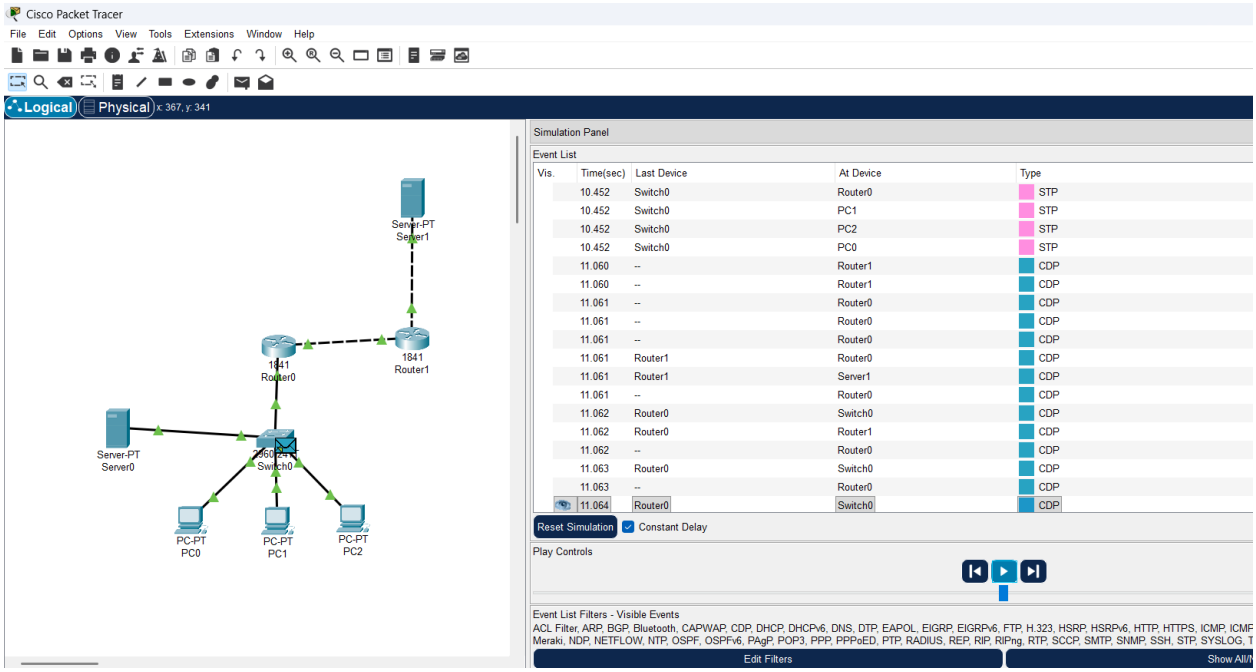


Рис. 11. Работа Static NAT (доступ к веб-серверу).


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 528, y: 119
Device Name: Server1
Device Model: Server-PT
Port Link IP Address IPv6 Address MAC Address
FastEthernet0 Up 213.234.20.2/24 <not set> 0001.97C2.5EAE
Gateway: 213.234.20.1
DNS Server: <not set>
Line Number: <not set>
Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Server1
1841
Router0
Router1
Server-PT
Server0
2960-24TT
Switch0
PC-PT
PC0
PC-PT
PC1
PC-PT
PC2


Server-PT
Server1
1841
Router1
Router0
Server-PT
Server0
2960-24TT
Switch0
PC-PT
PC0
PC-PT
PC1
PC-PT
PC2


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 367, y: 341
Server-PT Server1
1841 Router0
1841 Router1
Server-PT Server0
2960-24TT Switch0
PC-PT PC0
PC-PT PC1
PC-PT PC2
Simulation Panel
Event List
Vis. Time(sec) Last Device At Device Type
10.452 Switch0 Router0 STP
10.452 Switch0 PC1 STP
10.452 Switch0 PC2 STP
10.452 Switch0 PC0 STP
11.060 -- Router1 CDP
11.060 -- Router1 CDP
11.061 -- Router0 CDP
11.061 -- Router0 CDP
11.061 -- Router0 CDP
11.061 Router1 Router0 CDP
11.061 Router1 Server1 CDP
11.061 -- Router0 CDP
11.062 Router0 Switch0 CDP
11.062 Router0 Router1 CDP
11.062 -- Router0 CDP
11.063 Router0 Switch0 CDP
11.063 -- Router0 CDP
11.064 Router0 Switch0 CDP
Reset Simulation
Constant Delay
Play Controls
Event List Filters - Visible Events
ACL Filter, ARP, BGP, Bluetooth, CAPWAP, CDP, DHCP, DHCPv6, DNS, DTP, EAPOL, EIGRP, EIGRPv6, FTP, H.323, HSRP, HSRPv6, HTTP, HTTPS, ICMP, ICMP
Meraki, NDP, NETFLOW, NTP, OSPF, OSPFv6, PAgP, POP3, PPP, PPPoED, PTP, RADIUS, REP, RIP, RIPng, RTP, SCCP, SMTP, SNMP, SSH, STP, SYSLOG, T
Edit Filters
Show All/