


Installation of TF_Asset GPS Tracker

Overview

This installation guide is for the GPS TF_Asset tracker we offer; it is intended to serve as a walkthrough on how to successfully install your TF_Asset GPS Tracker Device.

TLP1-SF obtains energy through direct sunlight to maintain working. During installation, make sure that the device can be exposed to direct sunlight every day, otherwise the device battery may not be charged, which will cause the device to shut down. If the device is not charged for more than three months, it may cause permanent damage to the internal battery. Before installation, we recommend fully charge the device with a USB charging cable.

LED indicator

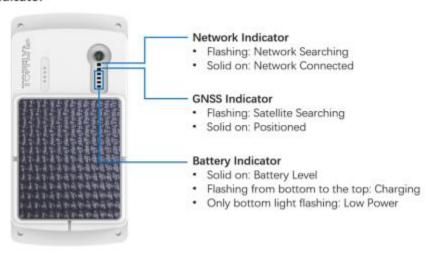

Note: Indicator lights will go out automatically after the tracker turns on for 70 seconds without connecting to the external power via USB cable.

EASITRACK 1



Installation Steps:

Step 1) Locate a secure spot on the exterior of your asset (trailer, tractor, machine, etc.) where the solar panel of the tracker can reach some light for charging the tracker battery.

Step 2) Secure the tracker by using the screws provided or any other applicable mean; make sure the unit is secured into position. After 5 to 10 minutes, the device should register on the network, provision itself to your account and be ready for tracking.

Step 3) Login with your username and password at http://www.easitrack.net. Your vehicle should be live and reporting on the map. Your installation is now complete.

*** PLEASE READ ****

EASITRACK 2

^{*} EasiTrack makes information available on its web site to enhance customer knowledge and promote a better understanding of the hardware and its setup and configuration. When applicable, EasiTrack recommends using a professional installer with knowledge of car electronics**