



TECHNISCHE  
UNIVERSITÄT  
DARMSTADT

## ANSIAN - ANDROID SIGNAL ANALYZER

DENNIS MANTZ AND MAX ENGELHARDT

SEEMOO Secure Networking Lab

April 28, 2016

Secure Mobile Networking Lab  
Department of Computer Science



AnSiAn - Android Signal Analyzer  
SEEMOO Secure Networking Lab

Submitted by Dennis Mantz and Max Engelhardt  
Date of submission: April 28, 2016

Advisor: Prof. Dr.-Ing. Matthias Hollick  
Supervisor: Jiska Classen

Technische Universität Darmstadt  
Department of Computer Science  
Secure Mobile Networking Lab

## CONTENTS

---

1	INTRODUCTION	1
1.1	Project Definition . . . . .	1
1.1.1	Features . . . . .	1
1.1.2	Time Schedule . . . . .	3
1.2	Software Design . . . . .	3
1.2.1	Sprint 1: PSK <sub>31</sub> and RDS demodulation . . . . .	3
1.3	Cleanup Tasks . . . . .	5
1.3.1	Memory Optimizations . . . . .	5

## ACRONYMS

---

AM	Amplitude Modulation
AnSiAn	Android Signal Analyzer
FM	Frequency Modulation
GUI	Graphical User Interface
LSB	Lower Side Band
MVC	Model–View–Controller
PSK <sub>31</sub>	Phase Shift Keying, 31 Baud
RDS	Radio Data System
SDR	Software-Defined Radio
USB	Upper Side Band

## INTRODUCTION

---

Android Signal Analyzer (AnSiAn) is an Android application by the Secure Mobile Network Lab (SEEMOO) at Technische Universität Darmstadt. It features a graphical signal analyzer that can be used with common Software-Defined Radios (SDRs) like the HackRF and the RTL-SDR. The project is based on RF Analyzer, an application by Dennis Mantz. AnSiAn currently extends RF Analyzer by the following features:

- Time Domain Signal Graph (Waveform)
- Morse Decoder
- Scanner
- Codebase structured according to the Model–View–Controller (MVC) pattern

This lab aims to further extend the feature set of AnSiAn while also making the app more stable and refining existing features. The description of the project goals are listed in Section 1.1.

### 1.1 PROJECT DEFINITION

This section defines the features that will be implemented throughout the project and schedules them into three sprints.

#### 1.1.1 *Features*

The new features can be divided into mandatory features, that will have high priority within this project, and optional features, that will be implemented if time permits. As can be seen in Section 1.1.2, the third sprint is reserved for either optional features or completing mandatory features and the documentation.

##### 1.1.1.1 *Mandatory Features*

The following features are scheduled for implementation during the first and second sprint:

- Radio Data System (RDS) demodulation  
If the user selects the existing wide-band Frequency Modulation (FM) demodulation option, the app shall try to detect and

demodulate any existing RDS signal along with the audio demodulation. The extracted information shall be displayed on the screen.

- Phase Shift Keying, 31 Baud (PSK<sub>31</sub>) demodulation  
If the user selects either of the single side band demodulation modes (Upper Side Band (USB) and Lower Side Band (LSB)), he or she shall have the option to enable PSK<sub>31</sub> demodulation along with or instead of the audio demodulation. The demodulated text string shall appear and scroll through the analyzer window.
- Extraction of RDS-, Morse- and PSK<sub>31</sub>-data to logfiles  
If the user selects to demodulate any digital mode, the demodulated text shall be written to a log file specified by the user.
- Support for the rad10 badge  
The rad10 badge, which is a modified low-cost replica of the HackRF, shall be supported as a signal source by AnSiAn.
- Transmission support for HackRF and rad10  
If AnSiAn is used with an SDR capable of transmitting signals, it shall offer options to send signals in the following ways:
  - Replay I/O samples from a file
  - Generate and send Morse code from text
  - FM-modulate and send audio from a file

#### 1.1.1.2 *Optional Features*

The optional features are scheduled in the third and last sprint. However, they will only be added to the feature set if the last sprint is not needed in order to compensate for delays on the mandatory features. The optional features are listed in the order of priority:

- Walkie-Talkie Mode  
The user shall have the possibility to put AnSiAn into a Walkie-Talkie mode. In this mode, the application will demodulate an FM channel and the user can quickly switch between demodulation and transmission of audio recorded from the internal microphone.
- Packet Radio demodulation  
A new mode *Packet Radio* shall be added to AnSiAn. Once selected, it shall allow the user to tune to a Packet Radio channel and display information about demodulated packets on the screen. If time permits, it might even be possible to implement a transmission feature for Packet Radio.

### 1.1.2 Time Schedule

The project will have two developers, Dennis Mantz and Max Engelhardt, working in three sprints. There are three milestones corresponding to the sprints, labeled Alpha, Beta and Final Version. They each add an independent and self-contained set of features to the application:

- Software Design (due 12.05.)
- Sprint 1: Alpha Version (due 09.06.)
  - RDS demodulation
  - PSK<sub>31</sub> demodulation
  - Extraction of RDS-, Morse- and PSK<sub>31</sub>-data to logfiles
- Sprint 2: Beta Version (due 21.07.)
  - Support for the rad10 badge
  - Transmission support for HackRF and rad10
    - \* Replay I/O samples from a file
    - \* Generate and send Morse code from text
    - \* FM-modulate and send audio from a file
- Sprint 3: Final Version (due 25.08.)
  - Complete leftovers from previous sprints
  - Walkie-Talkie Mode (optional)
  - Packet Radio demodulation (optional)

## 1.2 SOFTWARE DESIGN

The software design for each sprint is done ahead of the respective sprint. This procedure goes along well with the Agile Manifesto which encourages the design of a complex system in small incremental parts.

### 1.2.1 Sprint 1: PSK<sub>31</sub> and RDS demodulation

The existing architecture of AnSiAn features individual threads for scheduling, downsampling, demodulation and audio output. The Demodulator thread demodulates quadrature samples by calling the `demodulate()` method on an instance of `Demodulation`. `Demodulation` is an abstract class that is implemented by concrete demodulation methods such as AM, FM and Morse.

AnSiAn utilizes the EventBus library in order to pass demodulated morse text to the Graphical User Interface (GUI). Demodulated audio

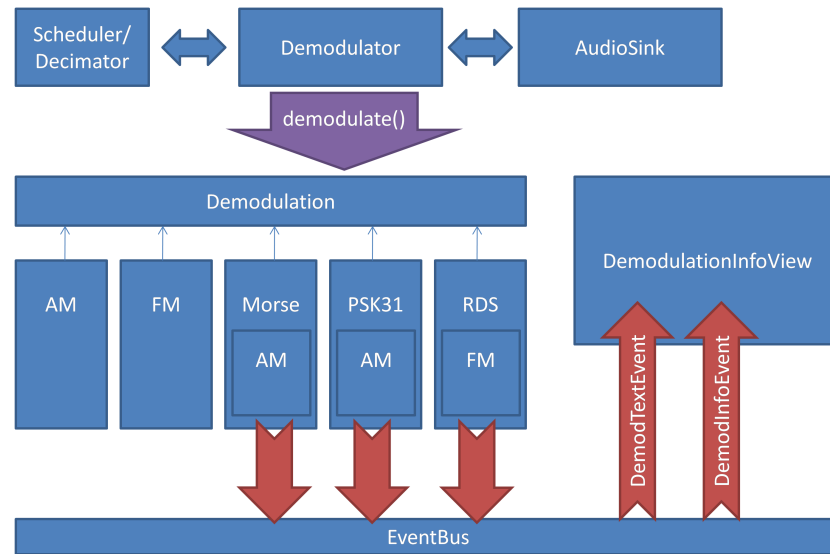


Figure 1: Architecture of the extended demodulation logic and communication with the GUI

data is passed to the AudioSink thread by enqueueing it into its input queue. This mechanism is explained in more detail in Section 1.3.1.

In order to extend AnSiAn with demodulation functionality for PSK31 and RDS, the existing architecture needs to be extended. The extended architecture is depicted in Figure 1 and explained in the following.

Two new classes PSK31 and RDS, that inherit from Demodulation, need to be implemented to represent the new demodulation mechanisms.

As PSK31 demodulation works on the envelope of the received signal and Amplitude Modulation (AM) demodulation essentially performs envelope detection, PSK31 uses an instance of AM for envelope detection.

RDS transmits metadata for FM radio channels. It is therefore desirable for the RDS demodulation mode to not only display this metadata, but to also play the FM-modulated audio at the same time. The RDS class uses an instance of FM for this purpose.

Like the existing architecture, the new architecture will use the EventBus library to pass the demodulated text to the GUI. The existing View MorseReceiveView is refactored into a universal DemodulationInfoView that displays the text output of any selected demodulator. Demodulators pass DemodTextEvents and DemodInfoEvents via the EventBus to the DemodulationInfoView, which contain demodulated text and further information (e.g. baud rates or raw dits and dahs) and are displayed in separate lines.



## 1.3 CLEANUP TASKS

### 1.3.1 *Memory Optimizations*



## ERKLÄRUNG

---

Hiermit versichere ich gemäß der Allgemeinen Prüfungsbestimmungen der Technischen Universität Darmstadt (APB) § 23 (7), die vorliegende Masterarbeit ohne Hilfe Dritter und nur mit den angegebenen Quellen und Hilfsmitteln angefertigt zu haben. Alle Stellen, die aus den Quellen entnommen wurden, sind als solche kenntlich gemacht worden. Diese Arbeit hat in gleicher oder ähnlicher Form noch keiner Prüfungsbehörde vorgelegen.

*Darmstadt, 28. April 2016*

---

Dennis Mantz and Max  
Engelhardt