

# Packet Tracer

10/04/2026

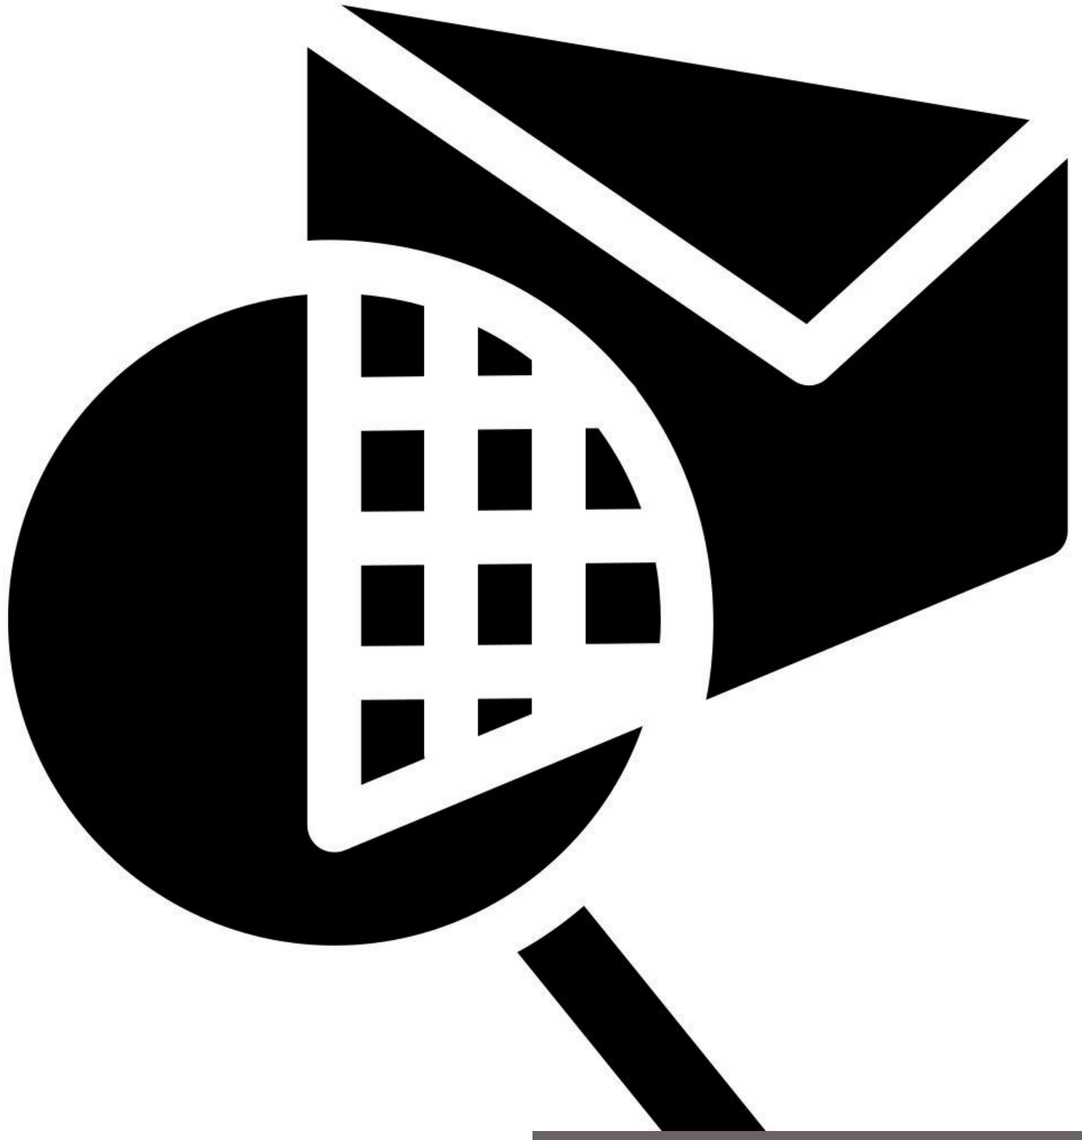

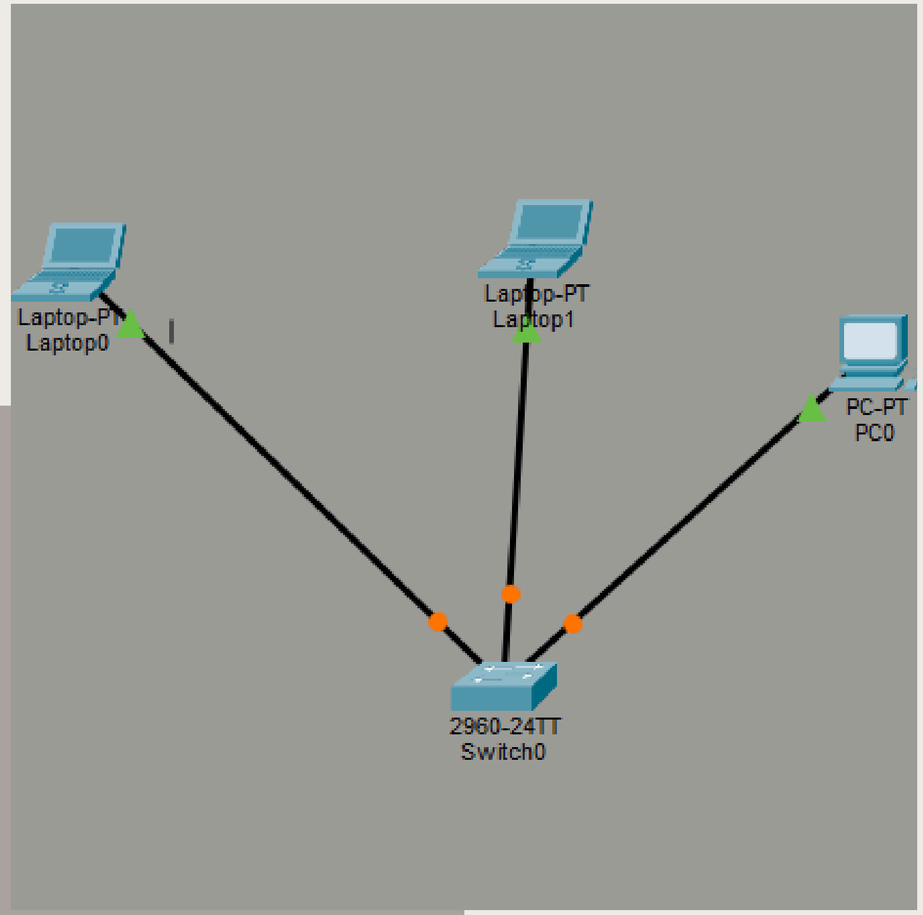


# Collegamenti Fisici


In questa immagine possiamo vedere come i 3 dispositivi sono connessi allo switch tramite un ethernet

Wardiere Inc.


# Configurazione IP

Ogniuno dei tre dispositivi è impostato con un IP statico,
In questo modo:


laptop0: 192.168.1.1/24
laptop1: 192.168.1.2/24
PC-Pc0: 192.168.1.3/24

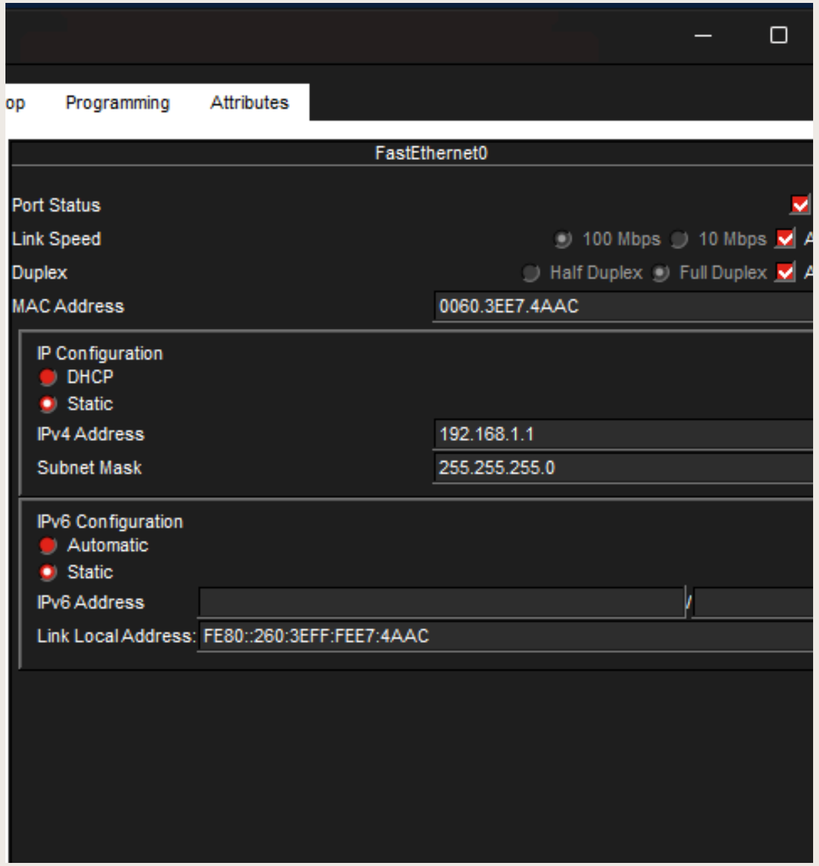


# PING LOGICO

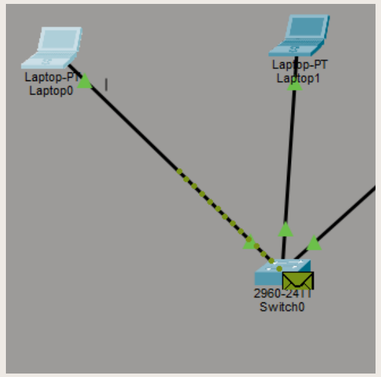


**Partenza del pacchetto**
Possiamo vedere come il pacchetto viene inviato allo switch

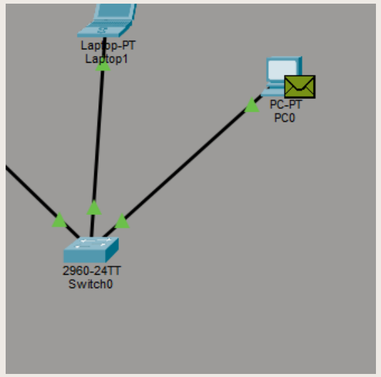


**Arrivo a pc target**
Qui il pacchetto viene consegnato al pc target (quello con l'ip scelto per il ping)

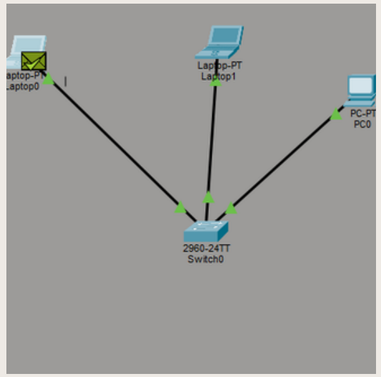


**Ritorna al destinatario**
Qui possiamo vedere come il pacchetto torna al destinatario

## Ping Pratico

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0%
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time=4ms TTL=128
```