


10G F/UTP Category 6A LSZH Cable

1859218-X

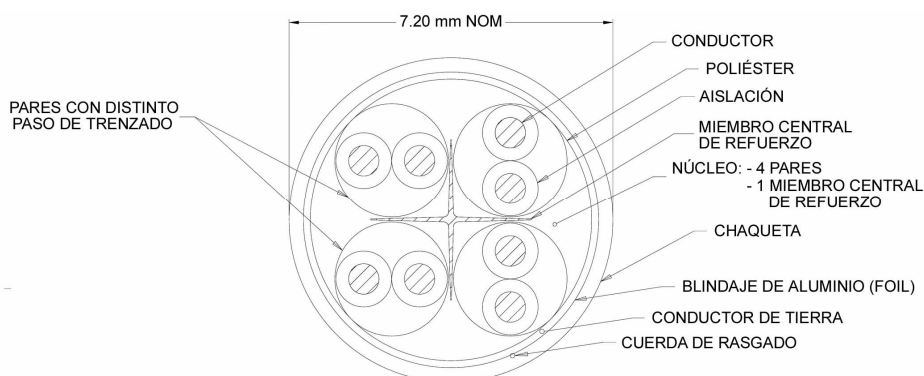

Description

AMP NETCONNECT's 10G F/UTP cable meets and exceeds the Category 6A channel performance requirements of the ANSI/TIA/EIA-568-C and ISO/IEC 11801:2002/Amd1:2008 Class EA standards up to 500 MHz, with significant margins in all parameters. The AMP NETCONNECT XG 10G System meets all the performance requirements of current and future applications, such as Ethernet (10BASE-T), Fast Ethernet (100BASE-TX), Gigabit Ethernet (1000BASE-T), 10 Gigabit Ethernet (10GBASE-T), Token Ring, ATM 155 Mbps, TP-PMD 100 Mbps, ISDN, analog and digital video, as well as analog and digital voice (VoIP and IP telephony), and exceeds all IEEE 802.3an 10 Gigabit Ethernet requirements.

The AMP NETCONNECT 10G F/UTP cable is available with an LSZH jacket. It comes in a wooden reel with a standard splice-free length of 305 meters. Standard jacket colors are white, gray, and blue.

Specification (Text in brackets)[...](requires selecting an alternative)

The horizontal cable must be F/UTP, 4-pair, single-wire, 23 AWG gauge, with LSZH jacket, color[white, gray, blue]The cable jacket must be free of substances harmful to the environment according to the EU RoHS Directive. The cable must meet the performance requirements listed in the following table.[[include Performance Characteristics table from back page]The cable must be supplied on wooden reels. The horizontal cable must be AMP NETCONNECT part number[1859218-X,(X denotes the color of the jacket)].

Part Number

Description	Nominal Diameter		NVP	Weight	Packaging	Part Numbers		
	Dielectric	Abroad				White	Grey	Blue
F/UTP Cable 4 Pairs 23 AWG 10G LSZH	1.04 mm	7.20 mm	72%	60.10 Kg/Km	305 m (Wooden Reel)	1859218-2	1859218-4	1859218-6

10G F/UTP Category 6A LSZH Cable

1859218-X



Desem Characteristics peño (Cumpl andor exceeds re queRequirements Category 6 TOfrom ANSI/TIA/EIA-568-B.2-1 0)

Frequency (MHz)	IL Maximum (dB/100 m)	NEXT Minimum (dB)	PSNEXT Minimum (dB)	ELFEXT Minimum (dB)	PSEFEXT Minimum (dB)	Retardation Maximum (ns/100 m)	RL Minimum (dB)	Impedance Feature (Ω)	ACR Minimum (dB)
4	3.7	65.3	63.3	55.8	52.8	552	23.0	100±15	61.0
8	5.2	60.8	58.8	49.7	46.7	547	24.5	100±15	55.0
10	5.9	59.3	57.3	47.8	44.8	545	25.0	100±15	53.0
16	7.4	56.2	54.2	43.7	40.7	543	25.0	100±15	49.0
20	8.3	54.8	52.8	41.8	38.8	542	25.0	100±15	46.0
25	9.3	53.3	51.3	39.8	36.8	541	24.3	100±15	44.0
31.25	10.4	51.9	49.9	37.9	34.9	540	23.6	100±15	41.0
62.5	14.9	47.4	45.4	31.9	28.9	539	21.5	100±15	32.0
100	19.0	44.3	42.3	27.8	24.8	538	20.1	100±15	24.0
150	23.6	41.7	39.7	24.3	21.3	537	18.9	100±15	16.8
200	27.5	39.8	37.8	21.8	18.8	537	18.0	100±15	10.6
250	31.0	38.3	36.3	19.8	16.8	536	17.3	100±15	5.3
300	34.2	37.1	35.1	18.3	15.3	536	16.8	100±15	-
500	45.3	33.8	31.8	13.8	10.8	536	15.2	100±15	-

Technical Details

LSZH		
Mutual Capacitance	5.6 nF/100 m maximum	
Input Impedance	100Ω ±15% (1-62.5 MHz) / ±22% (62.5-200 MHz) / ±25% (200-500 MHz)	
DC Resistor Conductor	66.58 Ω/Km maximum	
Voltage	300 V AC/DC	
Delay Difference	45 nsec maximum	
Propagation Delay	536 nsec/100 m maximum @ 500 MHz	
Nominal Propagation Speed	72%	
Operating Temperature	-20°C to +60°C	
Storage Temperature	-20°C to +80°C	
Radius of Curvature	4 x Cable diameter≈1.14" (28.8 mm)	
Packaging	305m Wooden Reel	18.33 Kg/305 m
Materials	Drivers	23 AWG, Single-wire, 0.554 mm Ø
	Insulation	Polyethylene 0.243 mm (1.04 mm nominal Ø)
	Jacket	LSZH 0.64 mm (7.20 mm nominal Ø) RoHS
Certifications	Security	UL Listing according to: UL444 IEC 60332-1
	Performance	ETL Verified Channel Specifications according to ANSI/TIA/EIA-568-C



Tyco Electronics reserves the right to modify these specifications without prior notice. All mechanical specifications are considered nominal and are subject to normal manufacturing tolerances.

USA
Canada
Mexico
South and Central America
Web

1-800-553-0938
905-475-6222
525-729-0400
54-11-4733-2200
<http://www.ampnetconnect.com>

Revision E - 05/04/2010



© Copyright 2009 Tyco Electronics Corporation. All rights reserved.
AMP, NETCONNECT, AMP NETCONNECT, Tyco and Tyco Electronics are registered trademarks.