
Visits, demand and throughput

An application running on an embedder systems, alternates between CPU, Disk, and network communication cycles. Arrival rates, average service times, and routing probabilities have been determined and are shown in the picture below:

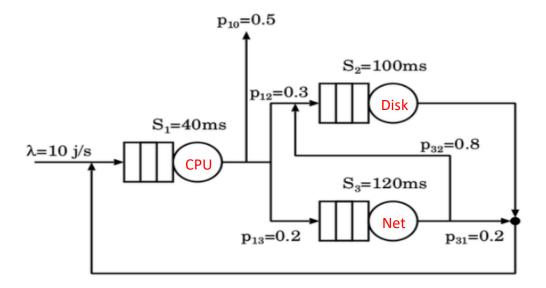

Compute:

- 1. The visits of the three stations
- 2. The demand of the three station
- 3. The throughput of the three stations.